



R2432600UL, R2432600ULCB UL Listed Rack Mount CCTV Power Supply

Rev. DSR2432600UL - E07I

Overview



- These Altronix AC Rack Mount CCTV Power Supplies provide 24VAC or 28VAC distributed via thirty-two (32) fuse or Class 2 Rated PTC protected power limited outputs for powering CCTV Cameras, heaters and other video accessories.

R2432600UL

- Thirty-two (32) fuse protected outputs.
- Outputs are rated @ 3.5 amp.

R2432600ULCB

- Thirty-two (32) Class 2 Rated PTC protected power limited outputs.
- Outputs are rated @ 2.5 amp.

Specifications

- Input 115VAC, 50/60Hz, 6 amp.
- 24VAC @ 25 amp (600VA) or 28VAC @ 20 amp (560VA) supply current.
- Illuminated power disconnect circuit breaker with manual reset.
- Surge suppression.
- Removable terminal blocks w/locking screw flanges.
- 3-wire grounded line cord.
- Individual power LEDs.
- Spare fuse(s) provided (fuse protected model only).
- Unit maintains camera synchronization.
- Ease of installation saves time and eliminates costly labor.
- 2U rack mount chassis for use in standard EIA 19" rack.
- Product weight:
 - ALTV2432600UL: 23.0 lbs.
 - ALTV2432600ULCB: 22.9 lbs.
- Shipping weight:
 - ALTV2432600UL: 24.0 lbs.
 - ALTV2432600ULCB: 23.9 lbs.

Agency Approvals



UL Listed for Commercial CCTV Equipment (UL 2044).






CUL Listed - CSA Standard C22.2 No.1-98, Audio, Video and Similar Equipment.

Enclosure Dimensions

3.25"H x 19.125"W x 8.5"D

View from back

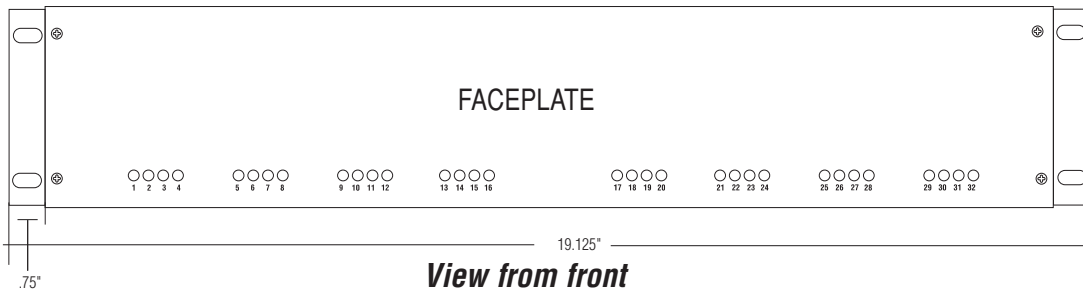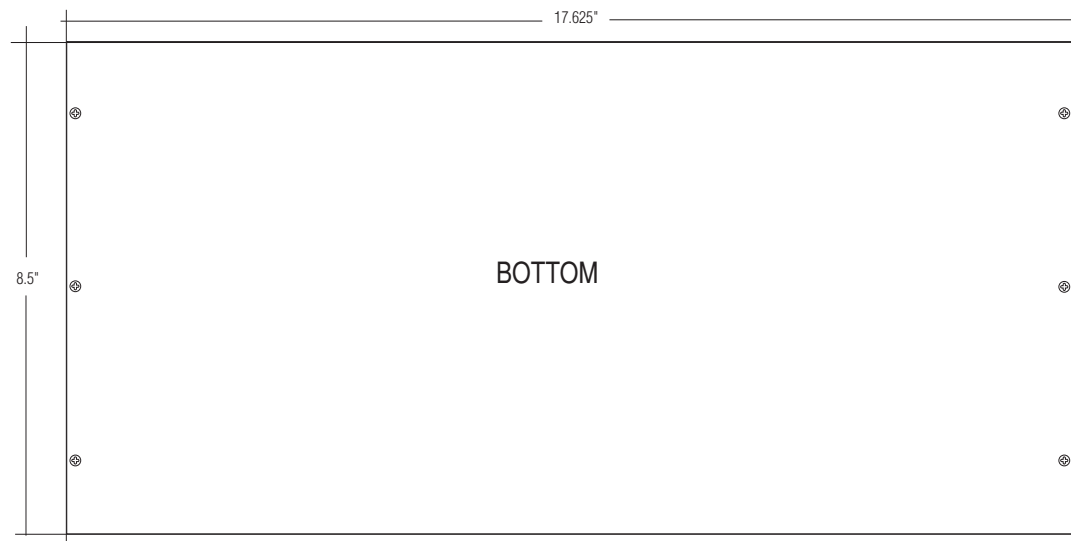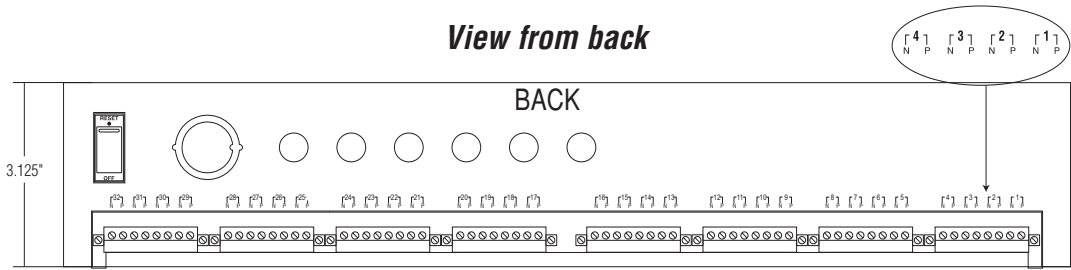

View from front