Altronix®

Rev. 01222025

T2AGK75F12D (Kit)

Access & Power Integration Solution for AMAG M4000

TROVE™

Altronix T2AGK75F12D kit consists of Trove2 enclosure, TAM2 AMAG/Altronix backplane with one (1) 24VDC @ 10A power supply/charger, one (1) 12VDC @ 10A power supply/charger, one (1) 8-output PTC access power controller, one (1) 4-output PTC access power controller, and one (1) PTC power distribution module.

This kit also accommodate up to three (3) AMAG M4000 modules for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

AMAG TECHNOLOGY
A G4S COMPANY

T2AGK75F12D

AMAG boards are not included

Key Features

- One (1) 24VDC and one 12VDC power supply/charger
- Accommodates up to three (3) AMAG M4000 modules
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
    - UL: UL294 - Access Control System
    - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2AGK75F12D (Kit)

Access & Power Integration Solution for AMAG M4000

Specifications

Power Supply/Charger 1 (eFlow104NB):

Input
- Voltage: 120VAC, 60Hz, 4.5A max.
- Input Fuse: 6.3A/250V

Output
- Voltage: 24VDC
- Current: 10A continuous

Power Supply/Charger 2 (eFlow102NB):

Input
- Voltage: 120VAC, 60Hz, 3.5A max.
- Input Fuse: 5A/250V

Output
- Voltage: 12VDC
- Current: 10A continuous

Both Power Supplies:

Outputs
- Auxiliary: Class 2 power-limited @ 1A (unswitched)
- Other: Overvoltage protection. Filtered and regulated

Battery Charging
- Capacity: 12AH/12VDC (4 within enclosure)
  40AH/65AH (requires separate enclosure)
- Type: Sealed lead acid or gel type
- Failover: Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect
- Supervised: Latching or non-latching
- EOL: 10K Resistor

Supervision
- AC Failure: Form "C" contacts
- Battery: Form "C" contacts
- Low DC Power Shutdown
  Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units or 71-73% for 12V units. Prevents deep battery discharge

Indicators (LED)
- AC Input: 120VAC is present
- DC Output: Powered

Access Power Controller (ACM8CB):

Input
- Voltage: 24VDC from eFlow104NB
- Input Fuse: 10A/250V

Outputs
- Voltage: 24VDC

Eight (8) independently controlled PTC outputs:
a) Fail-Safe and/or Fail-Secure power outputs
Form "C" Relays rated 28VAC or VDC @ 2.5A
b) Auxiliary power outputs (unswitched)
c) Any combination of the above

- Output PTCs: 2.5A

Indicators (LED)
- Red LEDs: Outputs are triggered (relays energized)
- Green LED: FACP disconnect is triggered

Access Power Controller (ACM4CB):

Input
- Voltage: 24VDC from eFlow104NB
- Input PTC: 9A

Outputs
- Voltage: 24VDC

Four (4) independently controlled PTC outputs:
a) Fail-Safe and/or Fail-Secure power outputs
Form "C" Relays rated 28VAC or VDC @ 2.5A
b) Auxiliary power outputs (unswitched)
c) Any combination of the above

- Output PTCs: 2.5A

Indicators (LED)
- Red LEDs: Outputs are triggered (relays energized)
- Green LED: FACP disconnect is triggered

Power Distribution Module (PD4ULCB):

Input
- Voltage: 12VDC from eFlow102NB

Outputs
- Voltage: 12VDC

Four (4) PTC protected outputs
2.5A per output max.

- Output PTCs: 2.5A

Indicators (LED)
- Green LED: DC Output

T2AGK75F12D Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies
Please refer to the corresponding Sub-Assembly Installation Guides for further information

- CE: European Conformity

Physical and Environmental:
- Dimensions (H x W x D)
  Enclosure: 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
  Shipping: 32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)
- Weight (approx.)
  - Product: 55.5 lb. (25.2 kg)
  - Shipping: 60.5 lb. (27.4 kg)
- Temperature
  - Operating: 0ºC to 49ºC (32ºF to 120ºF)
  - Storage: – 20ºC to 70ºC (– 4ºF to 158ºF)
- Relative Humidity: 85% +/– 5%
- BTU/Hr. (approx.): 177 BTU/Hr.

T2AGK75F12D (Kit)

Access & Power Integration Solution for AMAG M4000

Access Controller Position Chart for the Following Models:

AMAG	Pem Mounting
M4000-DEC4, M4000-DEC4 w/M4000-DBB, M4000-IOC20/16	Ⓐ

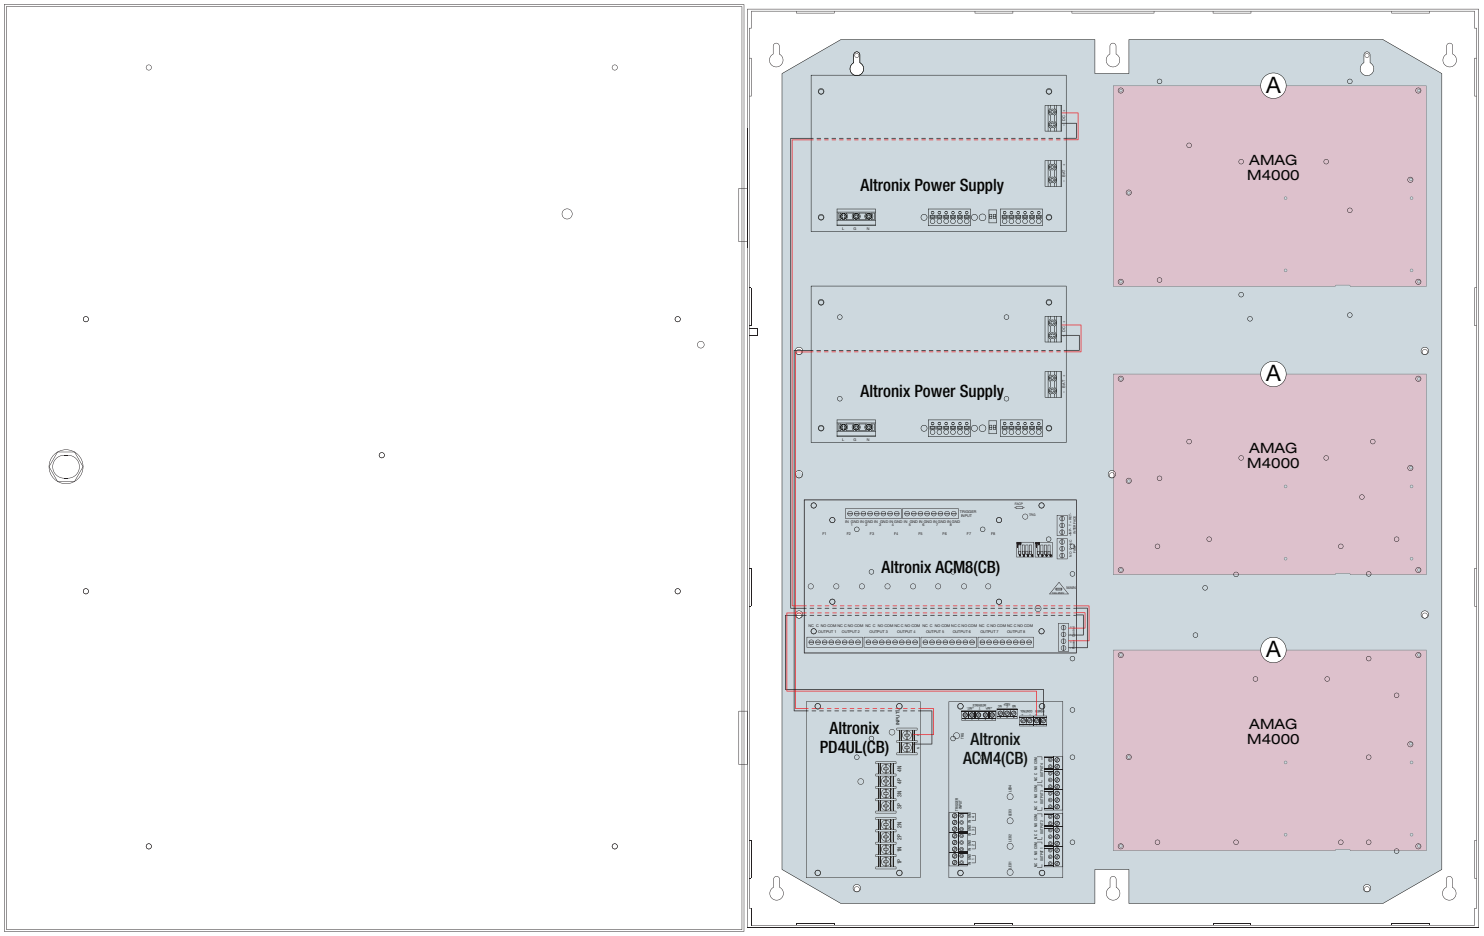

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2AGK75F12D (Kit)

Access & Power Integration Solution for AMAG M4000

Accessories (order separately)

LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC with batteries

Trove2BWC with wires

TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution.The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets.Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2AGK75F12D (Kit)

Access & Power Integration Solution for AMAG M4000

TROVE™

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

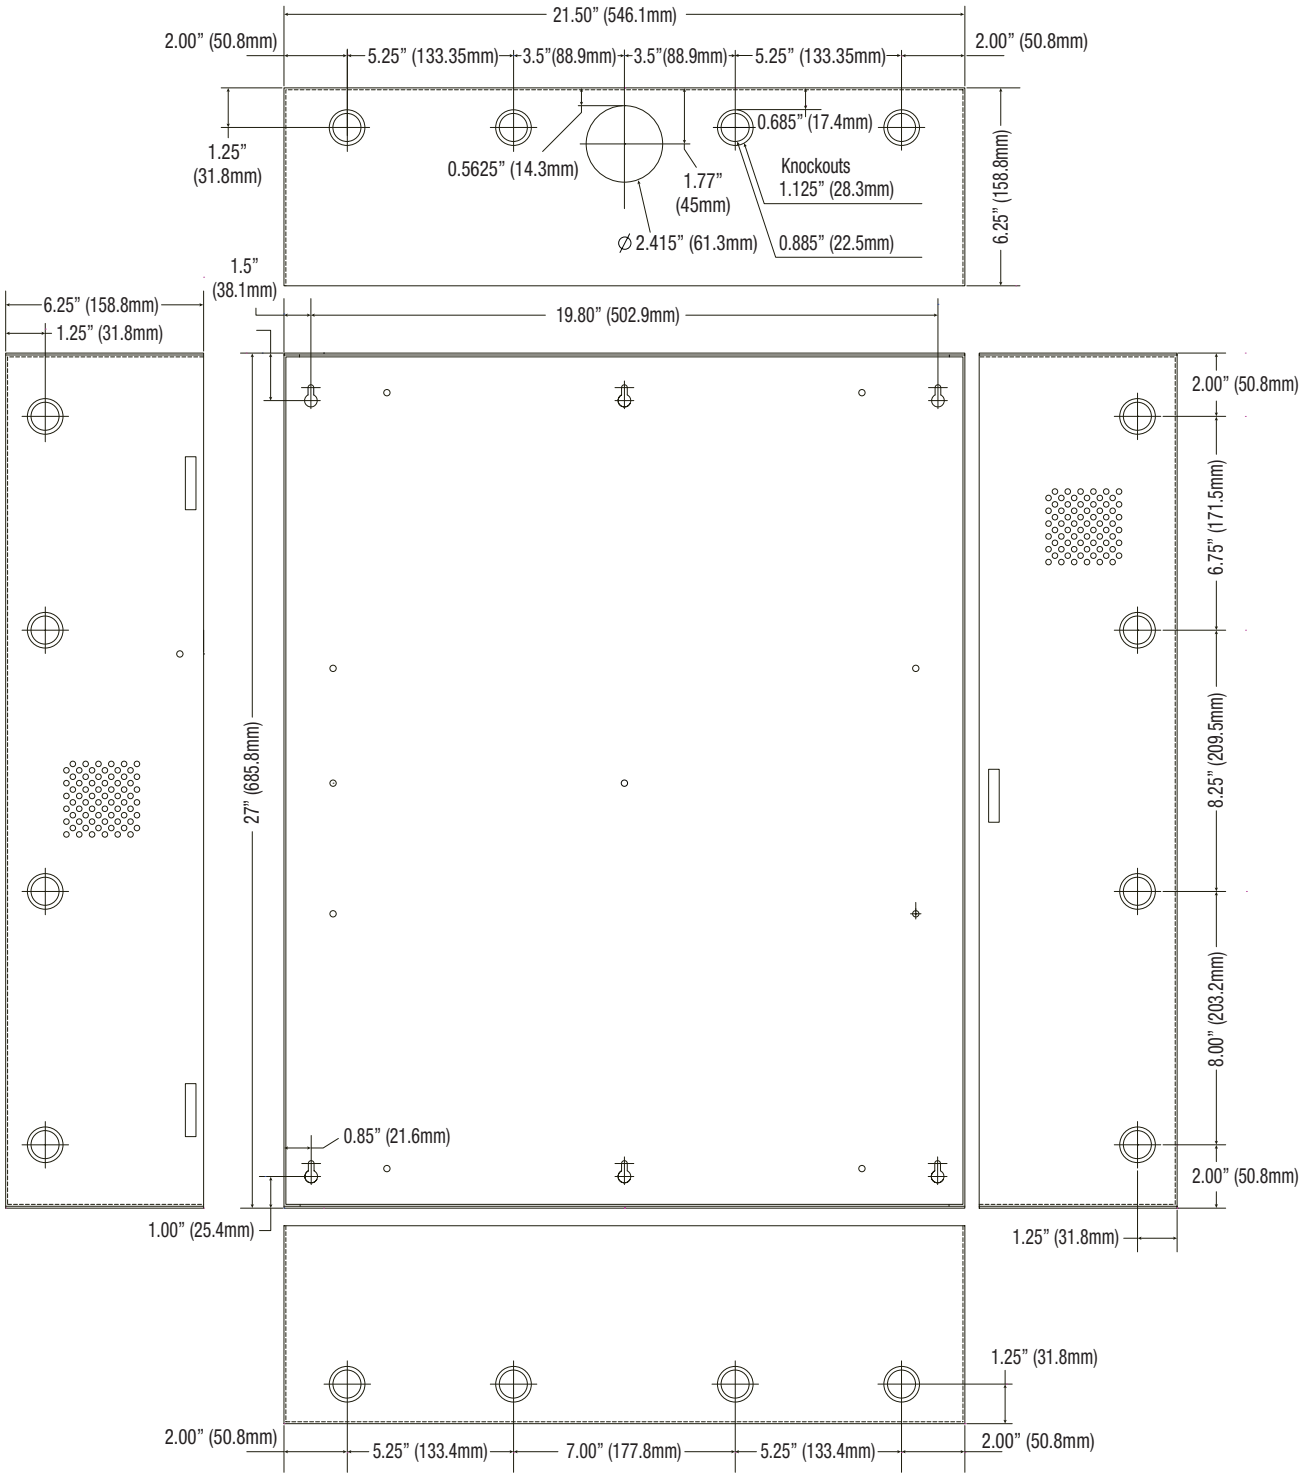

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com