



Altronix®

RBSNTTL - Ultra Sensitive Relay Module

Specifications:

- 12VDC to 24VDC operation.
- 3VDC to 24VDC
1-8mA isolated trigger.
- 1 amp/120VAC or 2 amp/28VDC
DPDT contacts.
- Snap track mountable
(order part # ST1).


Board Dimensions:

2.75"L x 1.9"W x 1.1"H

Installation Instructions:

1. Connect 12VDC or 24VDC
power supply (regulated) to terminals
marked [POS + and NEG -]. Carefully observe polarity.
2. Connect trigger voltage to terminals marked [TRG + and TRG -].
3. Use output contacts to make and break load circuits.

Note: When using a common power source the unused trigger terminal must be jumpered to its respective POS (+) or NEG (-) power supply terminal.

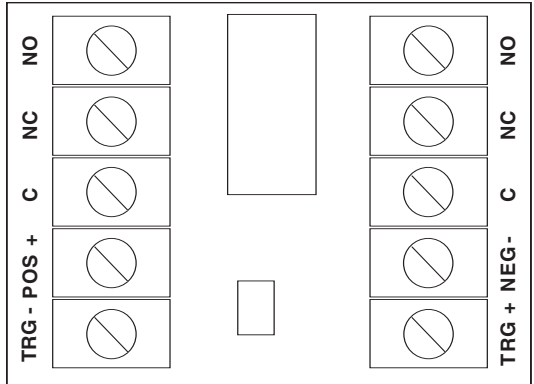

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA, 718-567-8181, fax: 718-567-9056
website: www.altronix.com, e-mail: info@altronix.com, Lifetime Warranty, Made in U.S.A.
IIRBSNTTL - Rev. 020106

C04I

