

T2HW7XK1DQ2 (Pre-wired Kit)

Access and Power Integration Solution for Honeywell



Altronix T2HW7XK1DQ2 is a 8-door network managed access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Honeywell ProWatch/WinPak hardware. This unit provides ample power and dual voltage outputs to support Honeywell platform controllers and locking devices. The T2HW7XK1DQ2 accommodates one (1) Intelligent Controller and three (3) Dual Reader Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.



Honeywell
THE POWER OF CONNECTED

T2HW7XK1DQ2 - includes
eFlow104NB, LINQ2, ACMS8CB,
VR6, PDS8CB,
wire harnesses and finger duct

Honeywell modules are not included

Key Features

- Accommodates the following Honeywell controllers:
 - 1 - PW7K11C/PRO42IC and 3 - PW7K1R2/PRO42R2
- Convenient knockout configuration:
 - One (1) single knockout - 2" Conduit
 - Sixteen (16) double knockouts - 1/2" Conduit and 3/4" Conduit
- Unit includes:
 - Removable backplane
 - Wire management
 - Custom wire assemblies for power distribution with terminal blocks for controller connections
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Enclosure accommodates up to four (4) 12VDC/7AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply/Charger (eFlow104NB):

Input

Voltage	120VAC, 60Hz. 4.5A
Input Fuse	6.3A/250V

Output

Voltage	24VDC
Current	10A continuous
Auxiliary	1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	12VDC/7AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)
 Prevents deep battery discharge

Indicators (LED)

Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

Network Communication Module (LINQ2):

Status Monitoring

AC status; Output current draw; Unit's temperature;
 DC output voltage; Low Battery/Battery presence detection
 Input trigger state change; Output (relay and power supply) state change

Programming

Battery service date indication
 Programmable via USB or web browser
 Automated timed events:
 - Control output relays and power supply via flexible timing parameter

Reporting

Programmable dashboard notifications
 E-mail notification selectable by event
 Event log tracks history (100+ events)

Indicators (LED)

Blue LED:	Power ON
-----------	----------

Voltage Regulator (VR6):

Input

Voltage	24VDC from eFlow104NB
---------	-----------------------

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Dual Input Access Power Controller (ACMS8CB):

Input

Voltage	24VDC from eFlow104NB and 12VDC from VR6
Input PTCs	9A

Outputs

Voltage 12 or 24VDC individually selectable
 Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) independently controlled Form "C" relay outputs:
 a) Fail-Safe and/or Fail-Secure power outputs
 b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated
 c) Auxiliary power outputs (unswitched)
 d) Any combination of the above

Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs	2.5A
-------------	------

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)
 Blue LED FACP disconnect is triggered
 Individual voltage LEDs:
 Green: 12VDC
 Red: 24VDC

Dual Input Power Distribution Module (PDS8CB):

Input

Voltage	24VDC from eFlow104NB and 12VDC from VR6
Input PTCs	9A

Outputs

Voltage 12VDC and/or 24VDC
 Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2
 Individual outputs may be set to OFF position for servicing

Output PTCs	2.5A
-------------	------

Indicators (LED)

DC Output Eight (8) individual output LEDs
 Green: 12VDC
 Red: 24VDC


T2HW7XK1DQ2 Kit:

Agency Listings

CE European Conformity
 All components of this Trove kit are UL Listed sub-assemblies
 Please refer to the corresponding Sub-Assembly Installation Guides for further information

Physical and Environmental:

Dimensions (H x W x D)
 Enclosure: 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
 Shipping: 32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)
 Weight (approx.)
 Product: 41.6 lb. (18.87 kg)
 Shipping: 45.6 lb. (20.68 kg)
 Temperature
 Operating 0°C to 49°C (32°F to 120°F)
 Storage - 20°C to 70°C (- 4°F to 158°F)
 Relative Humidity 85% +/- 5%
 BTU/Hr. (approx.): 145 BTU/Hr.

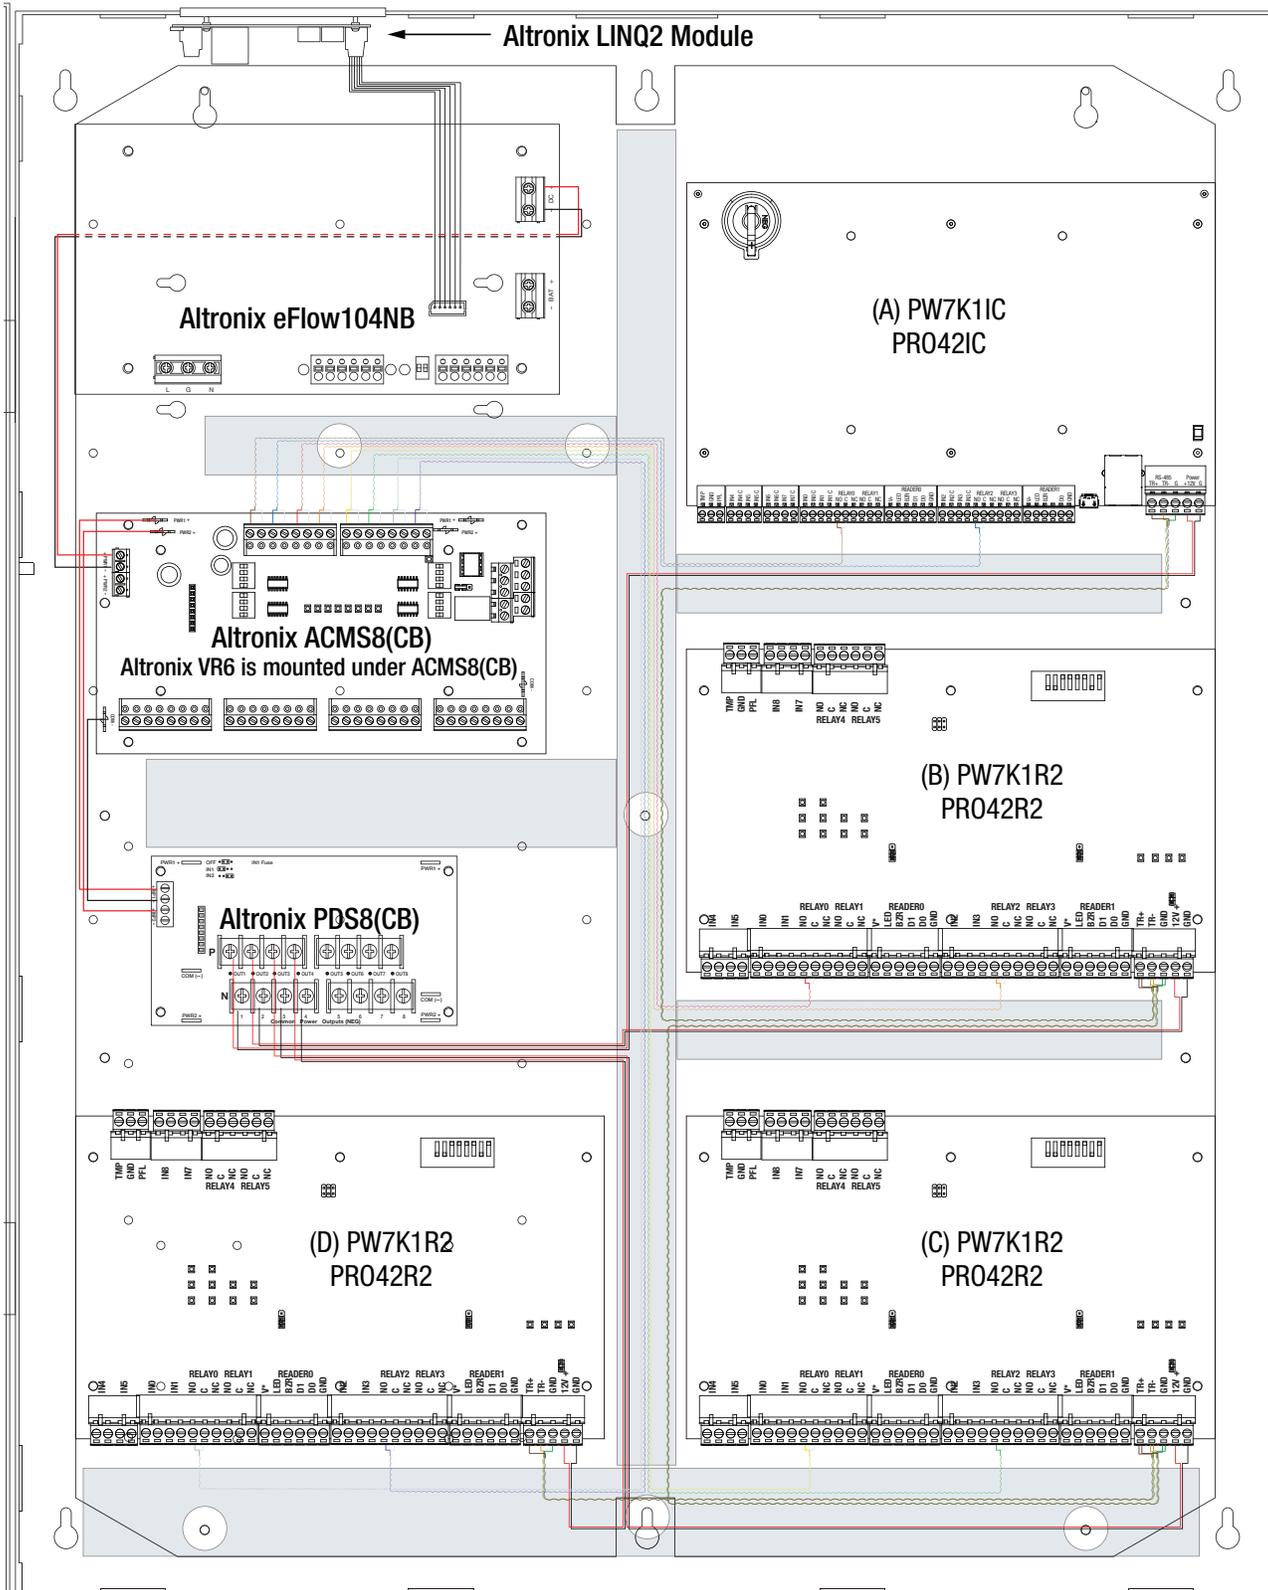

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

