

T2MK38V (Kit)

Access & Power Integration Solution for Mercury



Altronix T2MK38V kit consists of Trove2 enclosure and TM2 Altronix & Mercury backplane with 12VDC or 24VDC (factory set at 24VDC) @ 6A power supply/charger, 12VDC voltage regulator, eight (8) fuse protected output dual voltage power distribution module and eight (8) fuse protected output access control module. This kit also accommodates various combinations of Mercury* boards for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2, Schneider Electric, Vanderbilt



T2MK38V



Mercury boards are not included

Key Features

- 12VDC or 24VDC power supply/charger
- Accommodates the following Mercury controllers:
Mercury: LP1501, LP1502, LP2500, LP4502, MR16IN, MR16OUT, MR50, MR52, MR62e, MUX8
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply/Charger (AL600XB220):

| | |
|---------------|--|
| Input | |
| Voltage | 220VAC (working range 198VAC-256VAC), 50/60Hz, 1.5A |
| Input Fuse | 5A/250V |
| Output | |
| Voltage | 12VDC or 24VDC selectable |
| Current | 6A @ 12VDC or 24VDC continuous max. |
| Other | Overvoltage protection. Filtered and regulated |

Battery Charging

| | |
|-------------------------------|--|
| Capacity | 12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure) |
| Type | Sealed lead acid or gel type |
| Failover | Upon AC loss, instantaneous |
| Batteries are sold separately | |

Supervision

| | |
|------------|-------------------|
| AC Failure | Form "C" contacts |
| Battery | Form "C" contacts |

Indicators (LED)

| | |
|-----------|-----------------------------|
| Input | 220VAC is present |
| DC Output | Powered |
| Battery | Discharged or not connected |

Dual Input Power Distribution Module (PDS8):

| | |
|--------------|--|
| Input | |
| Voltage | 24VDC from AL600XB220 and 12VDC from VR6 |
| Input Fuses | 10A/32V |

Outputs

| | |
|--|--------------------|
| Voltage | 12VDC and/or 24VDC |
| Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2 | |
| Individual outputs may be set to OFF position for servicing | |
| Output Fuses | 3A/32V |

Indicators (LED)

| | |
|-----------|----------------------------------|
| DC Output | Eight (8) individual output LEDs |
| Green: | 12VDC |
| Red: | 24VDC |

Voltage Regulator (VR6):

| | |
|---------------|-----------------------|
| Input | |
| Voltage | 24VDC from AL600XB220 |
| Output | |
| Voltage | 12VDC |
| Current | 6A continuous |
| Other | Surge suppression |

Indicators (LED)

| | |
|--------|------------------|
| Input | 24VDC is present |
| Output | Powered |

Access Power Controller (ACM8):

| | |
|--------------|-----------------------|
| Input | |
| Voltage | 24VDC from AL600XB220 |
| Input Fuse | 10A/250V |

Outputs

| | |
|---|-------|
| Voltage | 24VDC |
| Eight (8) 24VDC independently controlled fused outputs: | |
| a) Fail-Safe and/or Fail-Secure power outputs | |
| Form "C" Relays rated 28VAC or VDC @ 2.5A | |
| b) Auxiliary power outputs (unswitched) | |
| c) Any combination of the above | |

| | |
|--------------|-----------|
| Output Fuses | 3.5A/250V |
|--------------|-----------|

Indicators (LED)

| | |
|-----------|--|
| Red LEDs | Outputs are triggered (relays energized) |
| Green LED | FACP disconnect is triggered |

T2MK38V Kit:

Agency Listings

| | |
|----|---------------------|
| CE | European Conformity |
|----|---------------------|

Physical and Environmental

Dimensions (H x W x D)

| | |
|------------|---|
| Enclosure: | 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm) |
| Shipping: | 32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm) |

Weight (approx.)

| | |
|----------|----------------------|
| Product | 39.6 lb. (18 kg) |
| Shipping | 43.35 lb. (19.66 kg) |

Temperature


| | |
|-----------|---------------------------------|
| Operating | 0°C to 49°C (32°F to 120°F) |
| Storage | - 20°C to 70°C (- 4°F to 158°F) |

| | |
|-------------------|------------|
| Relative Humidity | 85% +/- 5% |
|-------------------|------------|

| | |
|-------------------|------------|
| BTU/Hr (approx.): | 87 BTU/Hr. |
|-------------------|------------|

Access Controller Position Chart for the Following Models:

| Altronix/Mercury | Pem Mounting |
|---------------------------------------|--------------|
| LP2500, MUX8 | (A) |
| LP1502, LP4502, MR52, MR16IN, MR16OUT | (B) |
| LP1501, MR62e | (C) |
| MR50 | (D) |

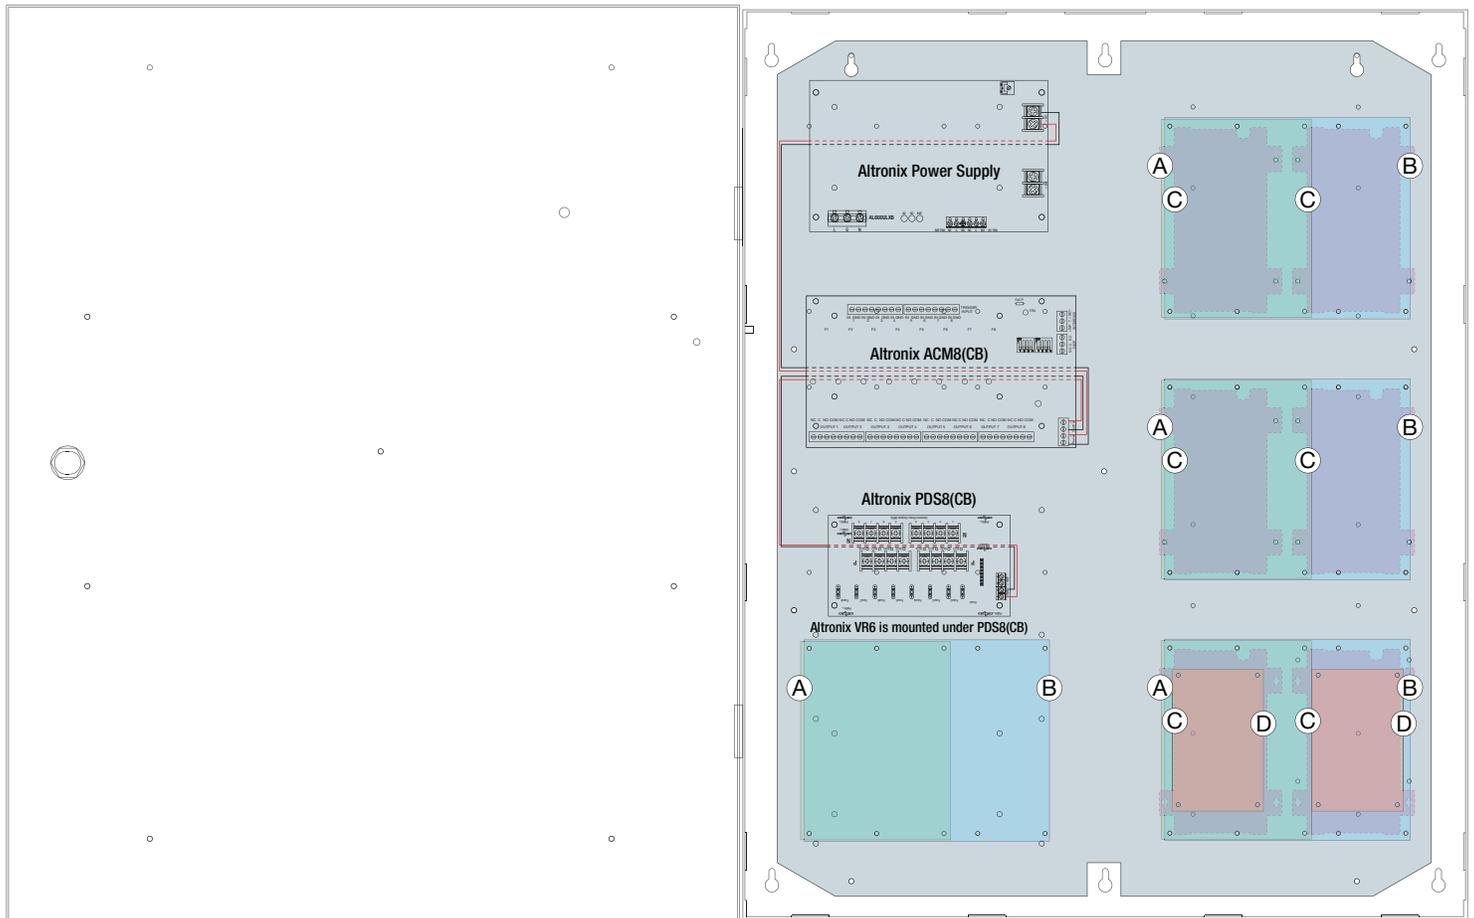

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.



Trove2BWC
with
batteries

TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.



Trove2BWC
with
wires

Dimensions and Drawing

Dimensions (H x W x D approximate)
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

