



RB1224

### Overview

RB1224 Relay Module can be utilized in many different applications such as: Dry Contact, Line Seizure, Polarity Reversal, Latching Dry Contact, and much more. The RB1224 is snap track mountable.

### Specifications

#### Input Voltage:

- 12VDC to 24VDC operation.
- Current draw: 75mA.

#### Contact Rating:

- DPDT contacts rated at 5 amp/220VAC or 28VDC.

#### LED Indicators:

- Relay status LED.
- Remote LED status output.

#### Electrical:


- Operating temperature:  $-25^{\circ}\text{C}$  to  $55^{\circ}\text{C}$  ambient.

#### Mechanical:

- Snap track mountable (order part # ST1).
- Product weight (approx.): 0.1 lbs. (0.05 kg).
- Shipping weight (approx.): 0.15 lbs. (0.07 kg).

#### Board Dimensions (W x L x H approximate):

2" x 2.75" x 1" (50.8mm x 69.85mm x 25.4mm)

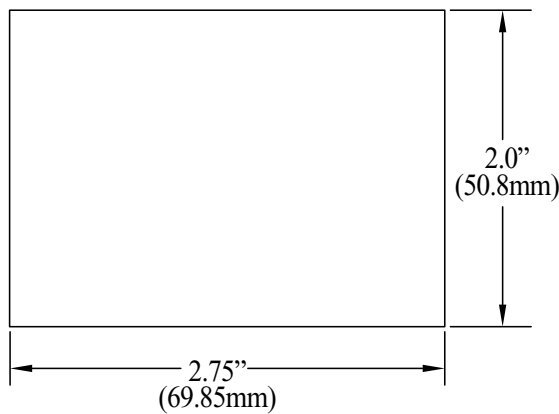

#### ST1 Mechanical Drawing

