


Overview

RBSNTTL is an ultra sensitive relay module.

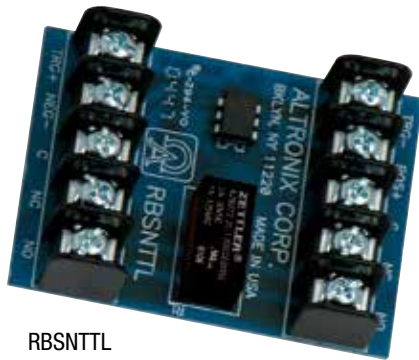

RBSNTTL

Specifications**Input Voltage:**

- 12VDC to 24VDC selectable operation.
- 3VDC to 24VDC 2mA - 16mA isolated trigger.
- Current draw: 45mA.

Contact Rating:

- 1 amp/120VAC or 2 amp/28VDC DPDT contacts.

Electrical:

- Operating temperature: -25° C to 55° C ambient.
- System AC input VA requirement: 10.8VA.

Mechanical:

- Snap track mountable (Altronix model # ST1).
- Dimensions (W x L x H approx.):
2" x 2.7" x 1.1" (50.8mm x 68.58mm x 27.94mm).
- Product weight (approx.): 0.1 lbs. (0.05 kg).
- Shipping weight (approx.): 0.15 lbs. (0.07 kg).

Board Dimensions (L x W x H approx.):

2" x 2.7" x 1.1" (50.8mm x 68.58mm x 27.94mm)

