

# T3AXK77F16SDQ (Kit)

Access & Power Integration Solution for Axis Communications



Altronix T3AXK77F16SDQ kit consists of Trove2 enclosure, TV3 Axis Communications/ Altronix backplane with two (2) 24VDC @ 10A power supply/charger, two (2) eight (8) PTC protected networked dual input/output access control modules, two (2) 12VDC voltage regulators and two (2) sixteen (16) PTC protected dual input/output power distribution modules. This kit also accommodates up to eight (8) A1601 or A1610 or sixteen (16) A1210 modules for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T3AXK77F16SDQ with eight (8) A1601  
DIN Rail is not included

*Axis Communications boards are not included*



## Key Features

- Two (2) 24VDC power supply/chargers
- Accommodates AXIS A1601, A1610 or A1210 modules
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Two (2) double knockouts  
1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
  - Thirteen (13) double knockouts  
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - CE European Conformity
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

**Specifications**

**Two (2) Power Supply/Charger (eFlow104NB):**

**Input**

Voltage 120VAC, 60Hz, 4.5A max.  
 Input Fuse 6.5A/250V

**Outputs**

Voltage 24VDC  
 Current 10A continuous  
 Auxiliary Class 2 power-limited @ 1A (unswitched)  
 Other Overvoltage protection. Filtered and regulated

**Battery Charging**

Capacity 12AH/12VDC (2 within enclosure)  
 40AH/65AH (requires separate enclosure)

Type Sealed lead acid or gel type  
 Failover Upon AC loss, instantaneous  
 Batteries are sold separately

**Fire Alarm Disconnect**

Supervised Latching or non-latching  
 EOL 10K Resistor

**Supervision**

AC Failure Form "C" contacts  
 Battery Form "C" contacts

**Low DC Power Shutdown**

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units. Prevents deep battery discharge

**Indicators (LED)**

Input 120VAC is present  
 DC Output Powered

**Two (2) Voltage Regulators (VR6):**

**Input**

Voltage 24VDC from eFlow104NB

**Output**

Voltage 12VDC  
 Current 6A continuous  
 Other Surge suppression

**Indicators (LED)**

Input 24VDC is present  
 Output Powered

**Two (2) Dual Input Power Distribution Modules**

**(PDS16CB):**

**Input**

Voltage 24VDC from eFlow104NB and 12VDC from VR6  
 Input PTCs 9A

**Outputs**

Voltage 12VDC and/or 24VDC  
 Any of the sixteen (16) power outputs are selectable to follow power Input 1 or Input 2  
 Individual outputs may be set to OFF position for servicing  
 Output PTCs 2.5A

**Indicators (LED)**

DC Output Sixteen (16) individual output LEDs  
 Green: 12VDC  
 Red: 24VDC

**Two (2) Network Access Power Controllers**

**(LINQ8ACMCB):**

**Input**

Voltage 24VDC from eFlow104NB and 12VDC from VR6

Input PTCs 9A

**Outputs**

PTC protected auto-resettable outputs  
 Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2  
 Individual outputs may be set to OFF position for servicing  
 Output PTCs: 2.5A

**Programming Features:**

**Eight (8) Programmable Outputs:**

- Fail-safe, fail-secure or auxiliary outputs
- Input controlled or manually controlled through software
- High (over) and low (under) voltage and current monitoring by output
- Multiple outputs may be programmed to be triggered by a single input
- Battery back-up by output

**Eight (8) Programmable Trigger Inputs:**

- Normally open (NO), Normally closed (NC) or Open collector sink inputs
- Wet Input (5VDC - 24VDC) with 10k resistor
- Any combination of the above

**Other Programmable Trigger Inputs:**

- Monitor power supply(ies) input for voltage and current limits (high/low)
- Input and output current calibration, Programmable timer events
- Programmable user levels, Enable or disable alerts by type
- Programmable alert reporting delay

**Indicators (LED)**

**Green AC LED:** indicates AC trouble condition  
**Green BAT LED:** indicates battery trouble condition  
**Green FACP LED:** indicates FACP disconnect is triggered  
**Flashing Blue Heartbeat LED:** indicates network connection  
**Individual OUT1 - OUT8 LEDs:** indicate outputs are triggered  
**Individual Voltage LEDs:** indicate 12VDC (Green) or 24VDC (Red)

**T3AXK77F16SDQ Kit:**

**Agency Listings**

CE European Conformity

**Physical and Environmental**

**Dimensions (H x W x D)**  
 Enclosure: 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)  
 Shipping: 40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

**Weight (approx.)**

Product 84.2 lb. (38.2 kg)  
 Shipping 97.5 lb. (44.22 kg)

**Temperature**

Operating 0°C to 49°C (32°F to 120°F)  
 Storage - 20°C to 70°C (- 4°F to 158°F)

**Relative Humidity**


85% +/- 5%.

**BTU/Hr (approx.):**

246 BTU/Hr.

**Access Controller Position Chart for the Following Models:**

Altronix/Axis Communications	Pem Mounting
Axis 1601, Axis 1610 (mounted onto DIN Rail)	(A)
Axis 1210 (mounted onto DIN Rail)	(B)

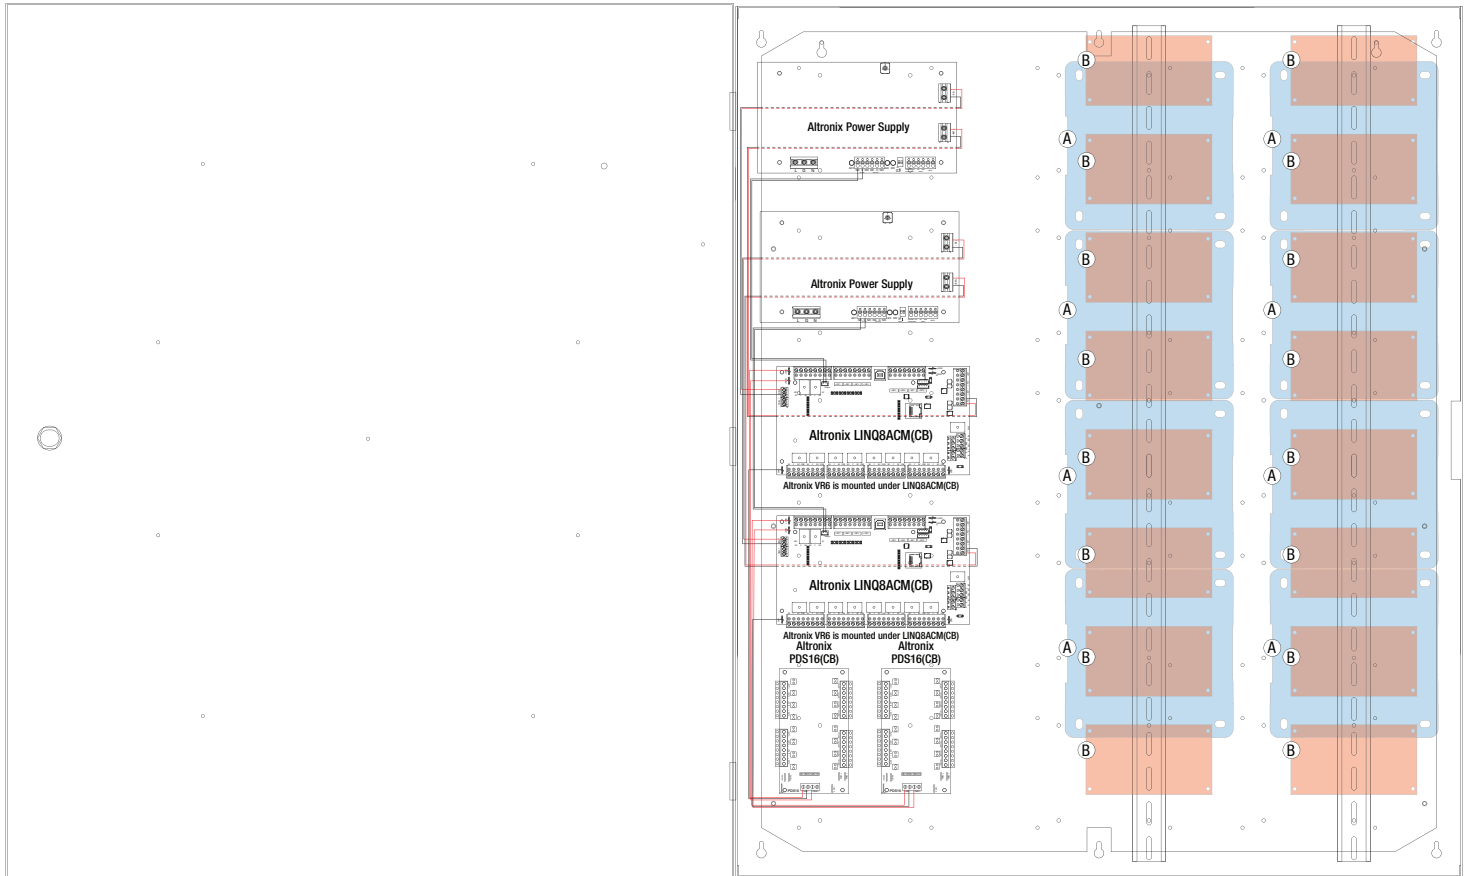

**Accessories** (order separately)



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

**MM4, MM8, MM12, MM24 - Magnetic Mounting Solution**


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/accessories in any metal enclosure or backplane.



BR1

**BR1 - Sub-Assembly Mounting Bracket**

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

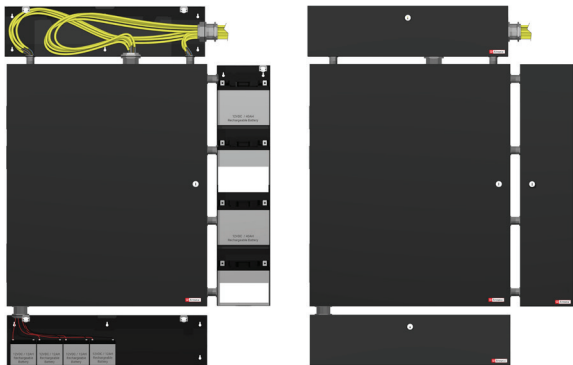

**TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure**

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

*Typical battery/wiring setup with Trove3 Enclosure (not included)*

**Dimensions and Drawing**

Dimensions (H x W x D approximate)  
 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

