

6030

Multi-Purpose Timer

Altronix 6030 programmable timer is suitable for most functions that require a timed operation e.g. Applications, Siren/Bell Cut Off Module, Dialer Delay, Guard Tour Supervisory Timer, Pulsar / Flasher, etc.



6030

Specifications

Input

Voltage	6VDC or 12VDC selectable
Current Draw	Stand-by: 3mA Relay Energized: 75mA

Relay

Contact Rating	8A/120VAC or 28VDC contacts Relay activates at the end of the timing cycle
----------------	---

Timer

Quick and extremely accurate time range adjustment from 1 second to 60 minutes.
Repeat (flasher/pulse) mode

Indicators (LED)


Red	Indicates relay is energized
-----	------------------------------

Physical and Environmental

Dimensions (L x W x H)	
3" x 2.5" x 0.75" (76.2mm x 63.5mm x 19.05mm)	
Product Weight	0.1 lb. (0.05 kg)
Shipping Weight	0.15 lb. (0.07 kg)
Temperature	
Operating	-25°C to 55°C (-13°F to 131°F)
Storage	-25°C to 70°C (-13°F to 158°F)
Relative Humidity	85% +/-5%

Board Dimensions (L x W x H) and Drawing

3" x 2.5" x 0.75" (76.2mm x 63.5mm x 19.05mm)

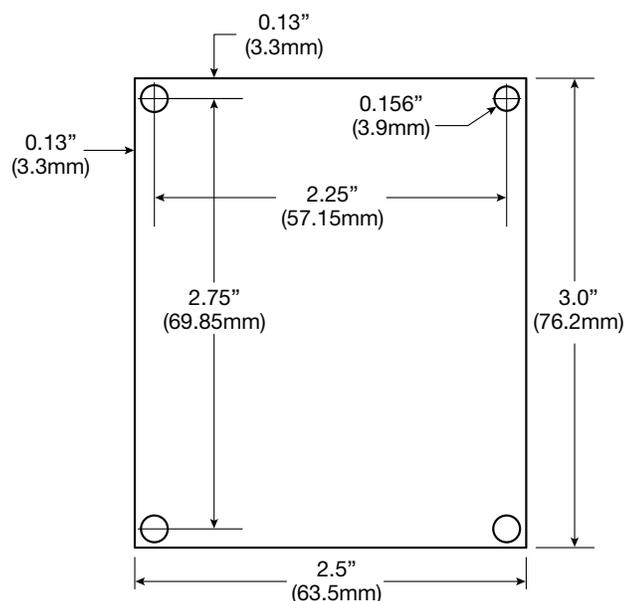

Lifetime Warranty