

T3BV77F16S (Kit)

Access and Power Integration Solution for Brivo



T3BV77F16S kit consists of Trove3 enclosure and TBV3 Brivo/Altronix backplane with two (2) 24VDC @ 10A power supply/chargers, two (2) 12VDC voltage regulators, two (2) eight (8) fuse protected dual input/output access control modules and two (2) eight (8) fuse protected dual input/output power distribution modules. This kit also accommodates various combinations of Brivo boards for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T3BV77F16S

Brivo boards are not included

Key Features

- 24VDC power supply/chargers
- Accommodates following Brivo boards:
 - One (1) ACS6000-MBE
 - Twelve (12) ACS6100-DB or ACS6100-I/O
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Two (2) double knockout 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
 - Thirteen (13) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*



T3BV77F16S (Kit)

Access and Power Integration Solution for Brivo



Specifications

Two (2) Power Supplies (eFlow104NB):

Input	
Voltage	120VAC, 60Hz, 4.5A max.
Input Fuse	6.3A/250V
Outputs	
Voltage	24VDC @ 10A
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	12VDC/12AH (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)
Prevents deep battery discharge.

Indicators (LED)

AC Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

Two (2) Dual Input Access Power Controllers (ACMS8):

Input	
Voltage	24VDC from eFlow104NB
Input Fuses	15A/32V
Outputs	
Voltage	12 or 24VDC individually selectable
Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) independently controlled Form "C" relay outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated	
c) Auxiliary power outputs (unswitched)	
d) Any combination of the above	
Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output Fuses	3A/32V

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Blue LED	FACP disconnect is triggered

Individual voltage LEDs:

Green:	12VDC
Red:	24VDC

Two (2) Voltage Regulators (VR6):

Input	
Voltage	24VDC from eFlow104NB
Output	
Voltage	12VDC
Current	6A continuous
Other	Surge suppression
Indicators (LED)	
Input	24VDC is present
Output	Powered

Two (2) Dual Input Power Distribution Modules (PDS8):

Input	
Voltage	12VDC and 24VDC from ACMS8
Input Fuses	10A/32V
Outputs	
Voltage	12VDC and/or 24VDC
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output Fuses	3A/32V
Indicators (LED)	
DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

T3BV77F16S Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies
Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:	36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
Shipping:	40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product:	84.2 lb. (38.2 kg)
Shipping:	97.5 lb. (44.22 kg)

Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity	85% +/- 5%
BTU/Hr. (approx.):	217 BTU/Hr.



T3BV77F16S (Kit)
Access and Power Integration Solution for Brivo



Access Controller Position Chart for the Following Models:

Altronix / Brivo	Pem Mounting
ACS6000-MBE	(A)
ACS6100-DB, ACS6100-I/O	(B)





T3BV77F16S (Kit)

Access and Power Integration Solution for Brivo



Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively.

They accommodate standard zip ties or velcro straps.

These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution



Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

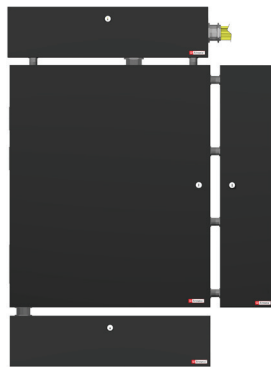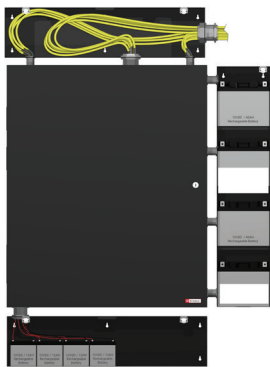

TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Typical battery/wiring setup with Trove3 Enclosure (not included)

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.12" x 7.06" (917.5mm x 768.1mm x 179.3mm)

