

# ACMCB220 Series

## Power Supply/Chargers with Multi-Output Access Power Controllers

Altronix ACMCB220 series distribute and switch power to access control systems and accessories. They convert a 220VAC 50/60Hz input into eight (8) independently controlled 12VDC or 24VDC PTC protected outputs. Outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. Units will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs.



AL600ACMCB220

### Key Features

- Eight (8) independently controlled Fail-Safe and/or Fail-Secure power outputs
- Eight (8) auxiliary power outputs (unswitched)
- Output PTCs are rated @ 2.5A
- Filtered and electronically regulated outputs
- Supervision:
  - AC Fail
  - Battery Fail and Battery Presence
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs
- Alarm output relay indicates that FACP input is triggered
- Fire Alarm disconnect input options:
  - a) Normally open (NO) or normally closed (NC) dry contact input
  - b) Polarity reversal input from FACP signaling circuit
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- CE European Conformity
- Lifetime Warranty

### ACMCB220 Series Power Supply Configuration Reference Chart

Altronix Model Number	12VDC Total Output Current	24VDC Total Output Current	PTC Protected Outputs (auto-resettable)	Individual Output Rating	220VAC 50/60Hz Input Current Draw	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	
AL400ACMCB220	4A	3A	8	2A	1.2A	5A/250V	15A/32V	
AL400ACMCBJ220								
AL600ACMCB220	6A	6A			1.5A			-
AL600ACMCBJ220								
AL1012ACMCB220	10A	-			2.2A	15A/32V		
AL1012ACMCBJ220								
AL1024ACMCB220	-	10A			3A	6.3A/250V		
AL1024ACMCBJ220								

#### Lifetime Warranty



# ACMCB220 Series

Power Supply/Chargers with Multi-Output Access Power Controllers

## Specifications

### Input

Voltage 220VAC (working range 198VAC - 256VAC), 50/60Hz

Fusing Varies, see Reference Chart

### Outputs

Voltage 12VDC or 24VDC, see Reference Chart

Current Varies, depending on the model

Protection PTC 2.5A

Auxiliary 3.5A (unswitched)

Other Overvoltage protection  
Filtered and regulated outputs

### Battery Charging

Capacity 12AH/12VDC (1 or 2 within enclosure)  
18AH/12VDC (requires larger "J" enclosure)  
40AH/65AH (requires separate enclosure)

Type Sealed lead acid or gel type

Fuse Rating 15A/32V  
AL600ACMCB(J)220 doesn't have battery fuse

Failover Upon AC loss, instantaneous  
Batteries are sold separately

### Fire Alarm Disconnect

Latching or non-latching, individually selectable for any or all of the eight (8) outputs

### Supervision

AC Failure Form "C" contacts

Battery Form "C" contacts

### Indicators (LED)

Input 220VAC is present

DC Output Powered

Battery Discharged or not connected

Relays Individual LEDs indicate outputs are triggered (relays energized)

FACP Indicates FACP disconnect is triggered

## Agency Listings

CE European Conformity

## Physical and Environmental

Enclosure Dimensions (H x W x D)

**AL400ACMCB220, AL600ACMCB220, AL1012ACMCB220, and AL1024ACMCB220:**

Enclosure:  
15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

Shipping:  
16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

**AL400ACMCBJ220, AL600ACMCBJ220, AL1012ACMCBJ220, and AL1024ACMCBJ220:**

Enclosure:  
18" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

Shipping:  
21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

## Weight (approx.)

Model	Product Weight	Shipping Weight
AL400ACMCB220	10.7 lb. (4.85 kg)	12 lb. (5.44 kg)
AL400ACMCBJ220	14 lb. (6.35 kg)	15 lb. (6.8 kg)
AL600ACMCB220	10.3 lb. (4.67 kg)	11.6 lb. (5.26 kg)
AL600ACMCBJ220	14.85 lb. (6.74 kg)	17.1 lb. (7.76 kg)
AL1012ACMCB220	10.7 lb. (4.85 kg)	12 lb. (5.44 kg)
AL1012ACMCBJ220	14.1 lb. (6.40 kg)	15 lb. (6.80 kg)
AL1024ACMCB220	11.75 lb. (5.33 kg)	13.05 lb. (5.92 kg)
AL1024ACMCBJ220	14.9 lb. (6.76 kg)	16.1 lb. (7.3 kg)

## Temperature

Operating: 0°C to 49°C (32°F to 120°F)

Storage: -20°C to 70°C (-4°F to 158°F)

## Relative Humidity

85% +/- 5%

## BTU/Hr. (approx.)

Model	12VDC	24VDC
AL400ACMCB(J)220	25	37
AL600ACMCB(J)220	37	74
AL1012ACMCB(J)220	61	N/A
AL1024ACMCB(J)220	N/A	123

## Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA


phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

# ACMCB220 Series

Power Supply/Chargers with Multi-Output Access Power Controllers

## Dimensions and Drawing

AL400ACMCB220, AL600ACMCB220, AL1012ACMCB220, AL1024ACMCB220 Dimensions (H x W x D approximate)  
15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

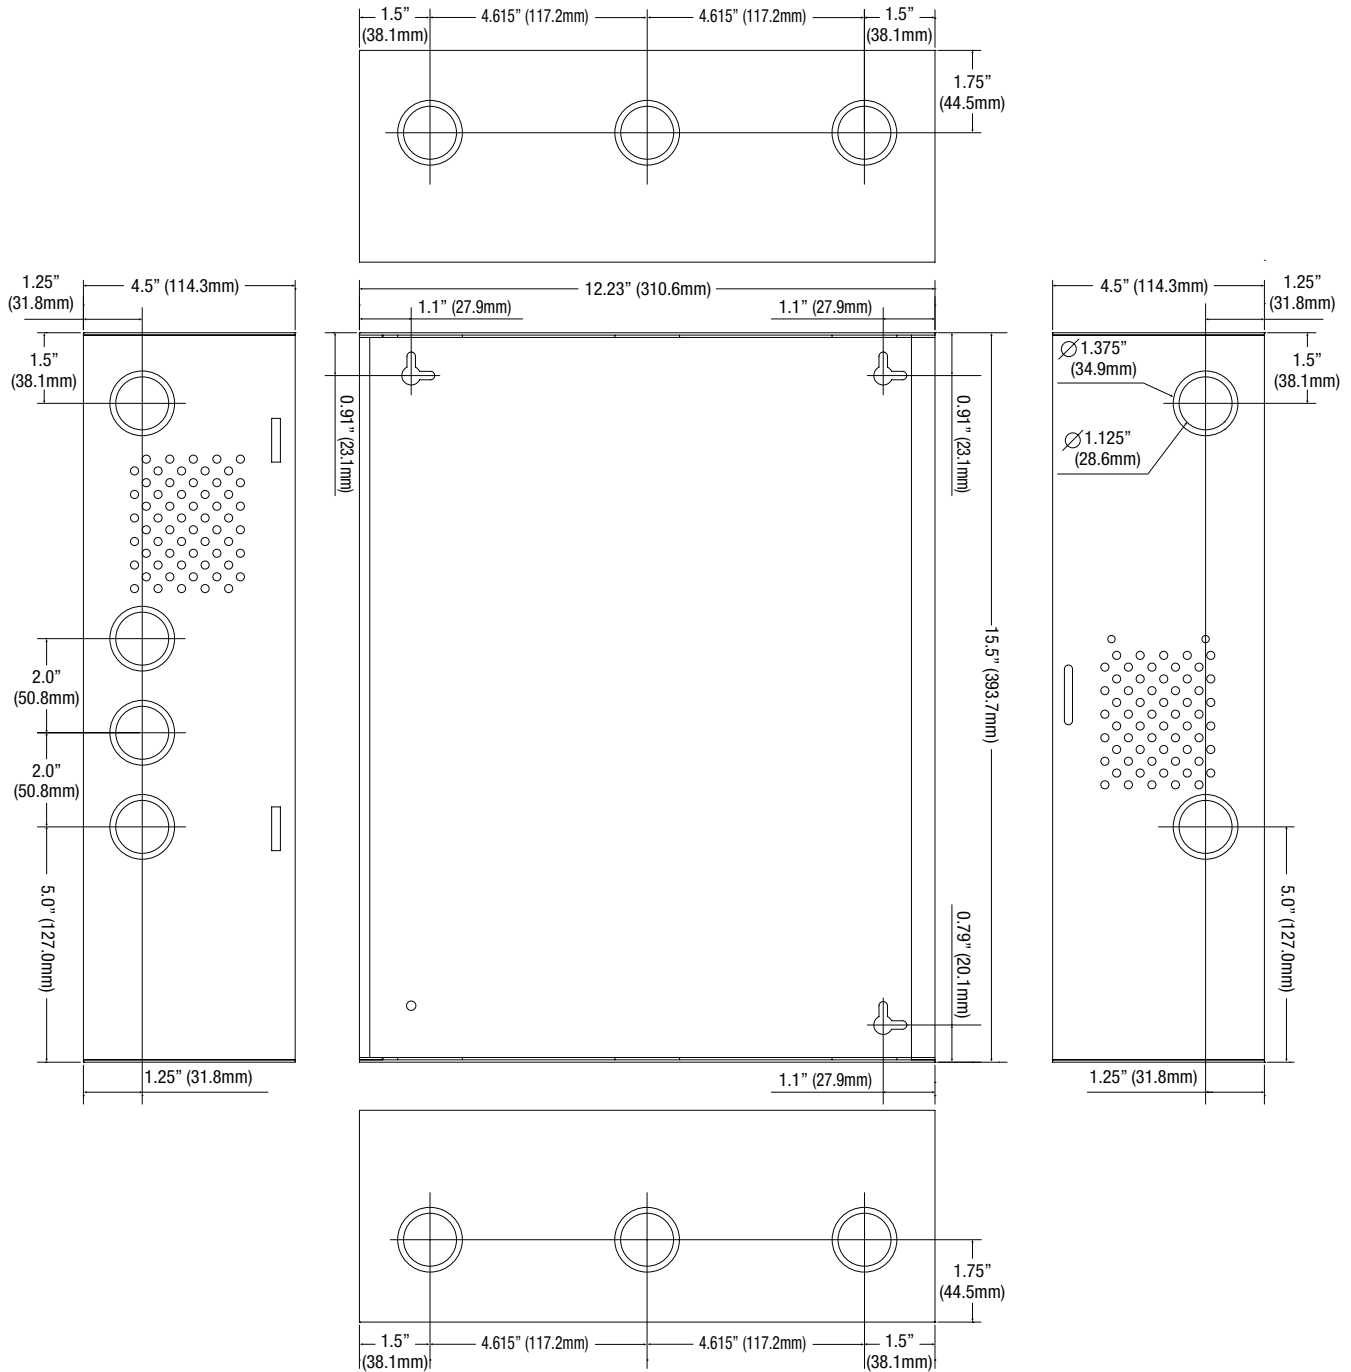

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA


phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

# ACMCB220 Series

Power Supply/Chargers with Multi-Output Access Power Controllers

## Dimensions and Drawing

AL400ACMCBJ220, AL600ACMCBJ220, AL1012ACMCBJ220, AL1024ACMCBJ220 Dimensions (H x W x D approximate)  
18" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

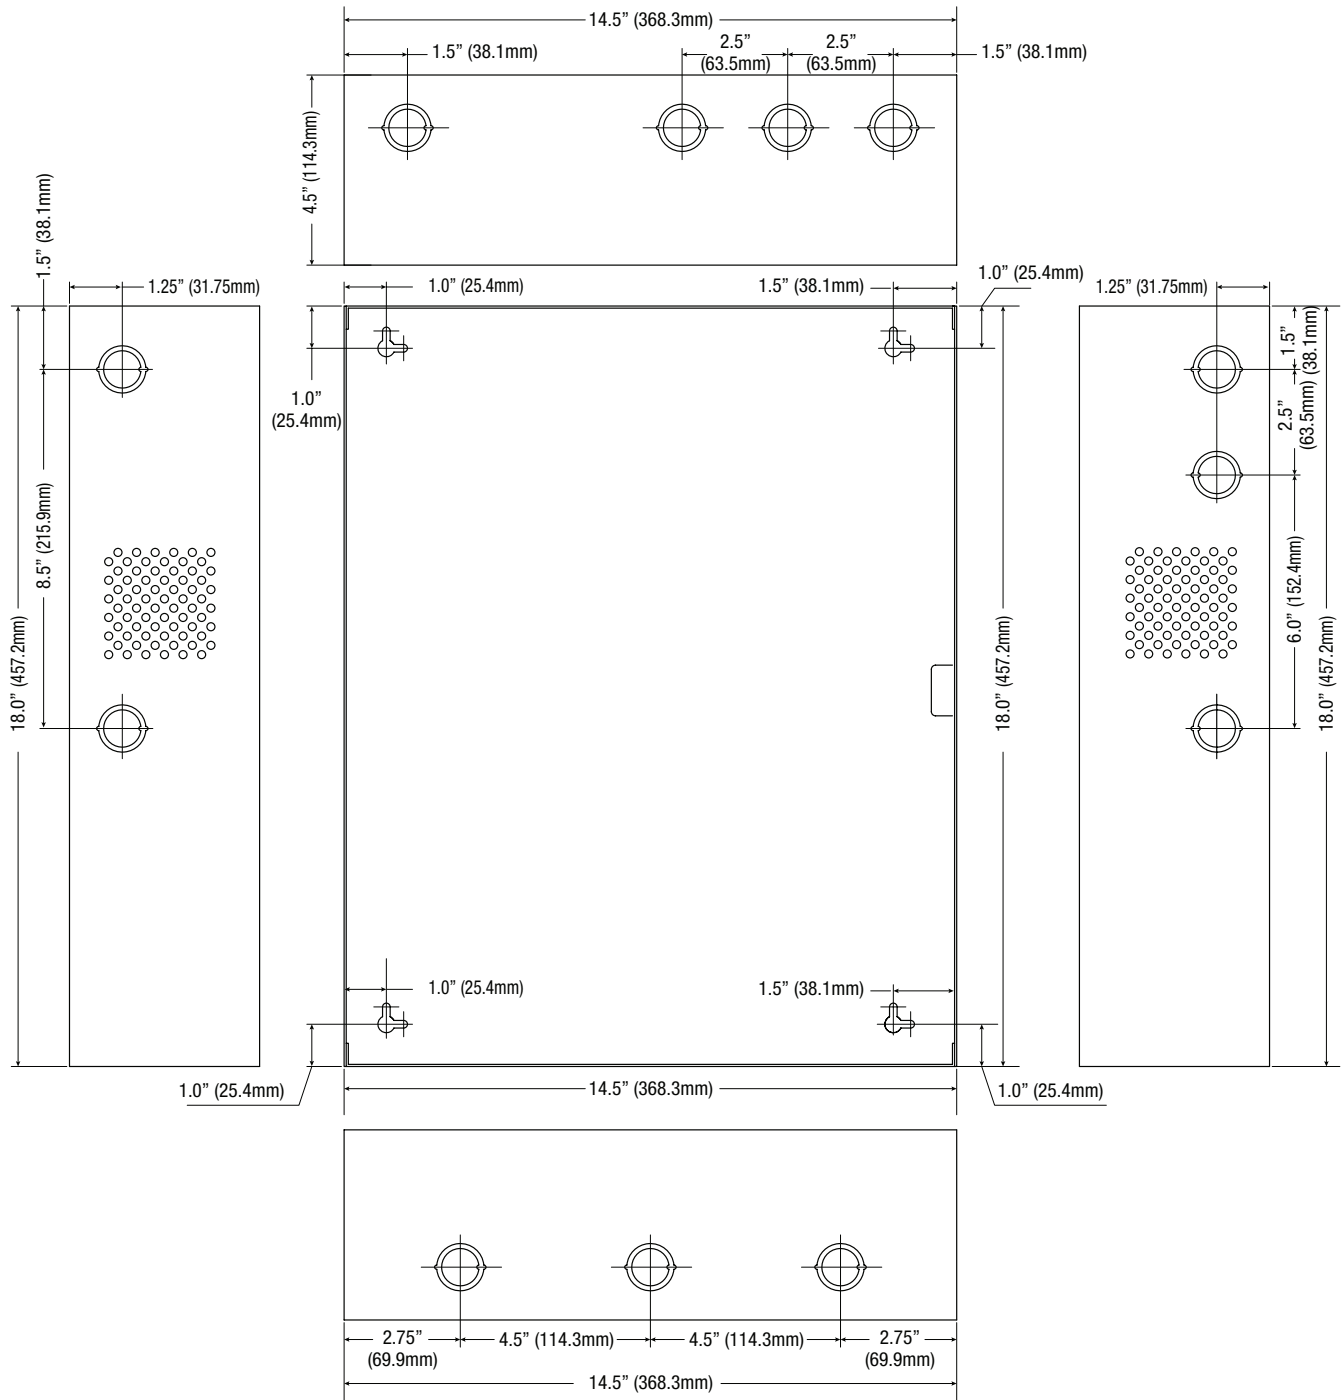

### Lifetime Warranty