

# AL1002ULADA

## NAC Power Extender

Altronix AL1002ULADA is an extremely cost effective voltage regulated remote NAC Power Extender. It may be connected to any 24 volt Fire Alarm Control Panel (FACP). Primary applications include Notification Appliance Circuit (NAC) expansion (supports ADA requirements) and providing auxiliary power to support system accessories.



AL1002ULADA

### Specifications

#### Input

Voltage	120VAC, 60Hz, 5A Two (2) Class A or two (2) Class B inputs Two (2) NC dry contact trigger inputs
---------	--------------------------------------------------------------------------------------------------------

#### Input Ratings (INP1 and INP2):

8-30VDC 6.5mA max from FACP
12V 6.5mA, 24V 6.5mA from FACP

#### Output

Voltage	24VDC power-limited outputs
Current	10A max. total alarm current 2.5A max. current per output
Auxiliary	1A
Other	Thermal and short circuit protection with auto reset Filtered and regulated outputs

#### Programmable Supervised Indicating Circuit Outputs:

Four (4) Class B, or Two (2) Class A, or One (1) Class A and Two (2) Class B
------------------------------------------------------------------------------

#### Battery Charging

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

#### Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

#### Indicators (LED)

AC Power (Green)	Input voltage is present.
DC Output (Red)	Powered.
Logic Board (Red and Green)	Output status

#### Agency Listings

UL	UL864 (Control Units and Accessories for Fire Systems)
MEA	NYC Department of Buildings Approved
FM	Factory Mutual Approved
CSFM	California State Fire Marshal Approved

#### Special Features

- 2-wire horn/strobe Sync mode allows audible notification appliances (horns) and visual notification appliances (strobes) to be silenced/deactivated at the same time
- Sync protocols include Potter/Amseco, Gentex®, System Sensor®, and CooperWheelock®
- Temporal Code 3, Steady Mode, Input to Output Follower Mode (maintains synchronization of notification appliances circuit)
- Compatible with 12VDC or 24VDC fire panels
- Output loop supervision steered to Input 1 or Input 2
- Signal circuit trouble memory (helps identify intermittent loop problems)
- Common trouble input and output for external trouble signals tie-in.
- Ground fault detection

#### Physical and Environmental

##### Dimensions (H x W x D)

Enclosure: 15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)
Shipping: 16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)
Enclosure accommodates up to two (2) 12VDC/12AH batteries.

##### Weight (approx.)

Product:	9.8 lb. (4.45 kg)
Shipping:	12.6 lb. (5.72 kg)

##### Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%


BTU/Hr. (approx.): 49 BTU/Hr.

#### Lifetime Warranty

### Dimensions and Drawing

Dimensions (H x W x D approximate)

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

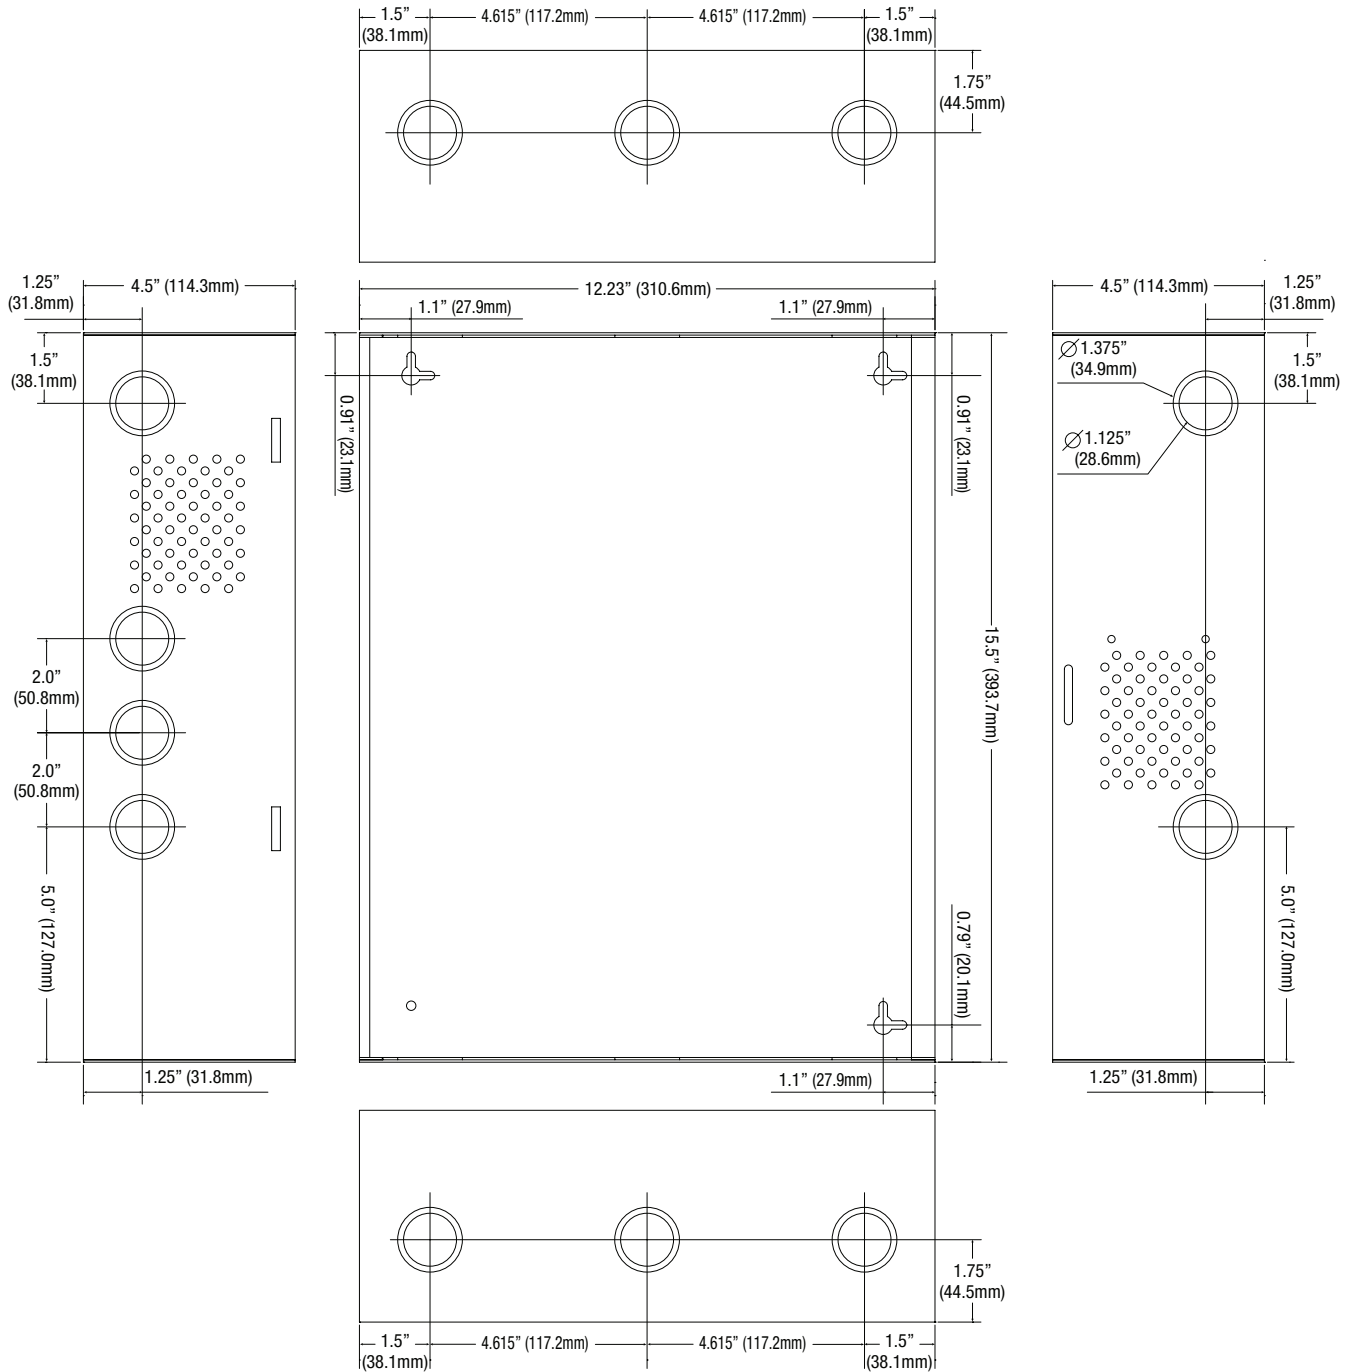

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com