

## T3MK77F16V (Kit)


Access & Power Integration Solution for Mercury



Altronix T3MK77F16V kit consists of Trove3 enclosure and TM3 Altronix & Mercury backplane with two 24VDC @ 10A power supply/chargers, two eight (8) fuse protected output access control modules and two eight (8) fuse protected output power distribution modules. This kit also accommodates various combinations of Mercury\* boards for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

**\*Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2, Schneider Electric, Vanderbilt

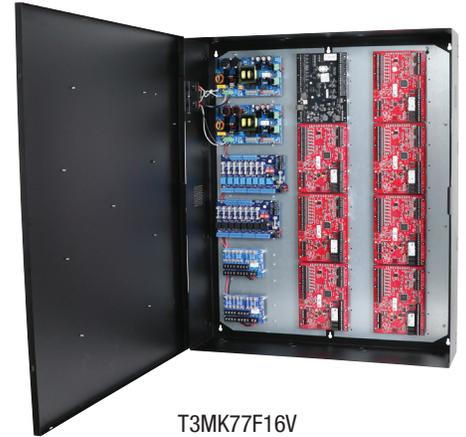

T3MK77F16V

*Mercury boards are not included*



### Key Features

- 24VDC power supply/chargers
- Accommodates the following Mercury controllers:  
Mercury: LP1501, LP1502, LP2500, LP4502, MR16IN, MR16OUT, MR50, MR52, MR62e, MUX8
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Two (2) double knockouts  
1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
  - Thirteen (13) double knockouts  
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- CE European Conformity
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

**Specifications**

**Two (2) Power Supply/Chargers (eFlow104NBV):**

|               |  |
|---------------|--|
| <b>Input</b>  |  |
| Voltage       | 220VAC (working range 198VAC - 256VAC),<br>50/60Hz, 2.7A |
| Input Fuse    | 6.3A/250V  |
| <b>Output</b> |  |
| Voltage       | 24VDC @ 10A  |
| Auxiliary     | 1A (unswitched)  |
| Protection    | Overvoltage protection. Filtered and regulated           |

**Battery Charging**

|                               |  |
|-------------------------------|--|
| Capacity                      | 12VDC/12AH (4 within enclosure)<br>40AH/65AH (requires separate enclosure) |
| Type                          | Sealed lead acid or gel type   |
| Failover                      | Upon AC loss, instantaneous  |
| Batteries are sold separately |  |

**Fire Alarm Disconnect**

|            |                          |
|------------|--------------------------|
| Supervised | Latching or non-latching |
| EOL        | 10K Resistor             |

**Supervision**

|            |                   |
|------------|-------------------|
| AC Failure | Form "C" contacts |
| Battery    | Form "C" contacts |

**Low DC Power Shutdown**

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

**Indicators (LED)**

|           |                             |
|-----------|-----------------------------|
| AC Input  | 220VAC is present           |
| DC Output | Powered.                    |
| Battery   | Discharged or not connected |

**Two (2) Power Distribution Modules (PD8UL):**

|                |                        |
|----------------|------------------------|
| <b>Input</b>   |                        |
| Voltage        | 24VDC from eFlow104NBV |
| <b>Outputs</b> |                        |
| Voltage        | 24VDC                  |
| Fuses          | 3.5A/250V              |

**Indicators (LED)**

|           |           |
|-----------|-----------|
| Green LED | DC Output |
|-----------|-----------|

**Two (2) Access Power Controllers (ACM8):**

|   |  |
|---|--|
| <b>Input</b>  |  |
| Voltage   | 24VDC from eFlow104NBV                   |
| Input Fuse  | 10A/250V                                 |
| <b>Outputs</b>  |  |
| Voltage   | 24VDC                                    |
| Eight (8) 24VDC independently controlled fused outputs: |  |
| a) Fail-Safe and/or Fail-Secure power outputs           |  |
| Form "C" Relays rated 28VAC or VDC @ 2.5A               |  |
| b) Auxiliary power outputs (unswitched)                 |  |
| c) Any combination of the above                         |  |
| Output Fuses  | 3.5A/250V                                |
| <b>Indicators (LED)</b>                                 |  |
| Red LEDs  | Outputs are triggered (relays energized) |
| Green LED   | FACP disconnect is triggered             |

**T3MK77F16V Kit:**

**Agency Listings**

|    |                     |
|----|---------------------|
| CE | European Conformity |
|----|---------------------|

**Physical and Environmental**

**Dimensions (H x W x D)**

|            |  |
|------------|--|
| Enclosure: | 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm) |
| Shipping:  | 40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)   |

**Weight (approx.)**

|          |                     |
|----------|---------------------|
| Product  | 85.6 lb. (38.83 kg) |
| Shipping | 98.8 lb. (44.82 kg) |

**Temperature**


|           |                                 |
|-----------|---------------------------------|
| Operating | 0°C to 49°C (32°F to 120°F)     |
| Storage   | - 20°C to 70°C (- 4°F to 158°F) |

Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 289 BTU/Hr.

**Access Controller Position Chart for the Following Models:**

| Altronix/Mercury                      | Pem Mounting |
|---------------------------------------|--------------|
| LP2500, MUX8                          | (A)          |
| LP1502, LP4502, MR52, MR16IN, MR16OUT | (B)          |
| LP1501, MR62e                         | (C)          |
| MR50                                  | (D)          |

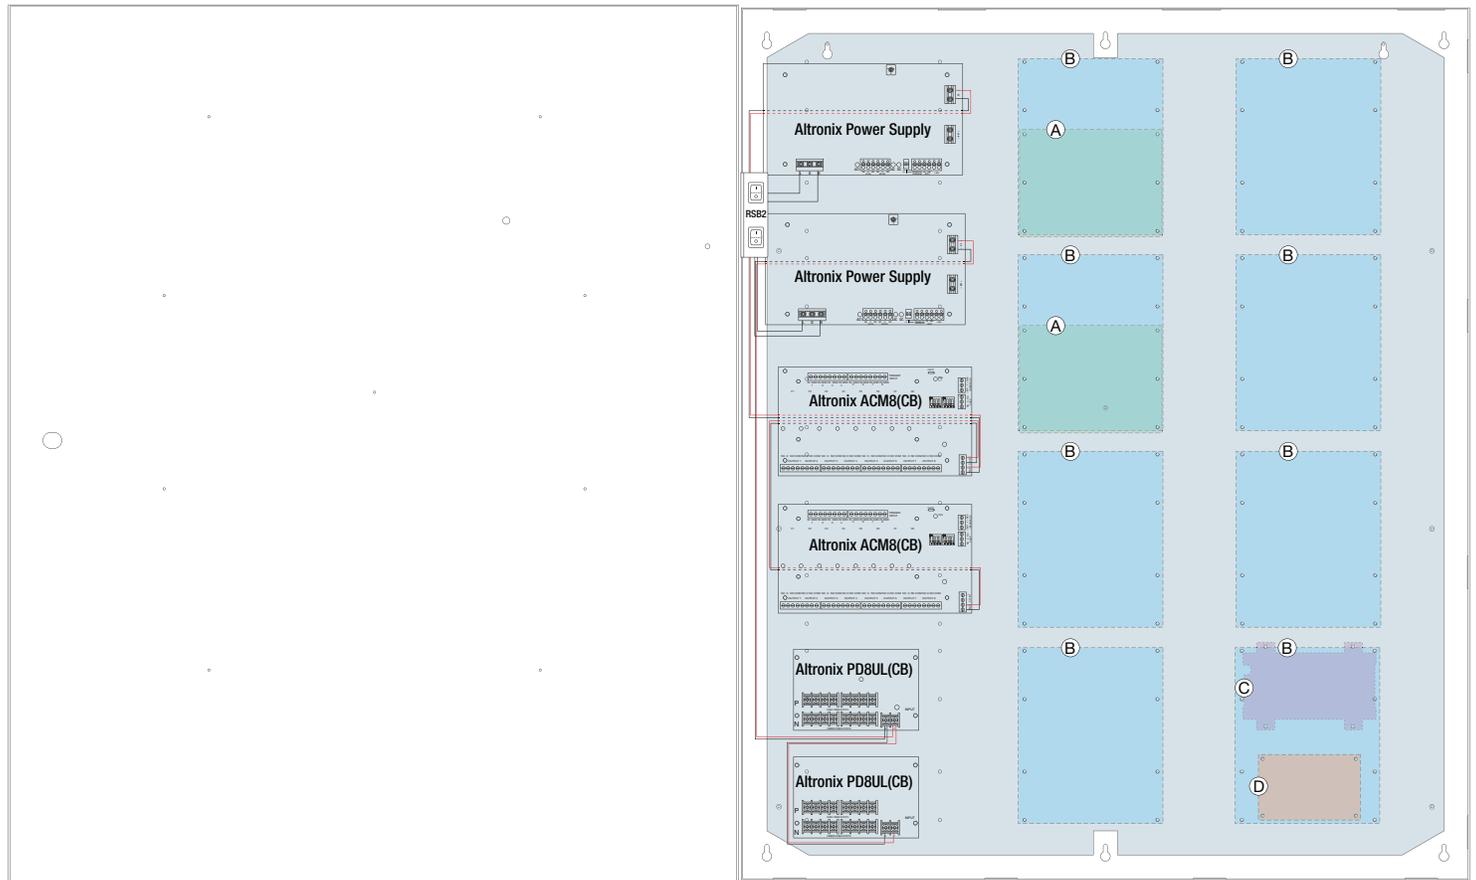

**Accessories** (order separately)



LINQ2

**LINQ2 - Network Supervision**

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

**MM4, MM8, MM12, MM24 - Magnetic Mounting Solution**


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

**BR1 - Sub-Assembly Mounting Bracket**

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

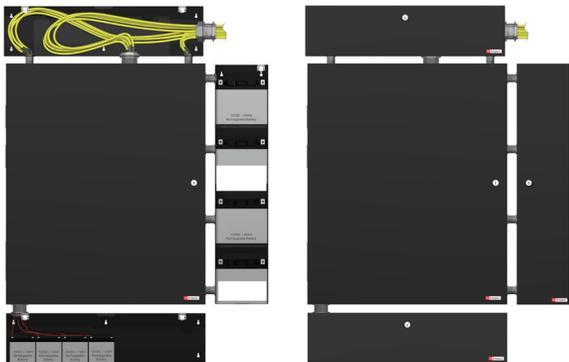

**TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure**

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

*Typical battery/wiring setup with Trove3 Enclosure (not included)*

**Dimensions and Drawing**

Dimensions (H x W x D approximate)  
 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

