



Rev. 07212022

## eFlow104NKA8QM

Networked Dual Voltage Access Power Controller with Power Supply/Charger



Ordering# EFLOW104NKA8QM

Kit Contents: eFlow104NX with VR6 and LINQ8ACM UL Listed sub-assemblies

Altronix eFlow104NKA8QM sub-assembly kit converts a 120VAC 60Hz input into eight (8) fuse protected outputs. Outputs are individually selectable, providing 12VDC or 5VDC up to 6A and/or 24VDC up to 10A (240W total power) for access control panels, door locks, and ancillary devices. Power outputs can be converted to dry form "C" contacts. Outputs are activated by an open collector sink, normally open (NO), normally closed (NC) dry trigger input, or wet output from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. eFlow104NKA8QM will route power to a variety of access control hardware devices including Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs. The spade connectors allow you to daisy chain power to multiple LINQ8ACM modules. This feature allows you to distribute the power over more outputs for larger systems. Built-in LINQ™ Network Power Management facilitates monitoring, reporting and control of power/diagnostics.



eFlow104NKA8QM

### Key Features

- Unit provides 12VDC or 5VDC up to 6A and/or 24VDC up to 10A (240W total power)
- Additional aux. Class 2 power-limited output rated @ 1A
- Short circuit and overvoltage protection
- Supervision
  - AC Fail
  - Battery Fail and Battery Presence
  - Low power shutdown
- Fire alarm disconnect
- Bi-colored LEDs provide visual verification of voltage on each output
- Stackable sub-assemblies save valuable space
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- Eight (8) independently controlled outputs
- Eight (8) auxiliary power outputs (unswitched)
- Filtered and electronically regulated outputs
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs
- Built-in LINQ technology facilitates monitoring, reporting, and control of power supply/charger over the network
- Reports diagnostics via Email and Windows Dashboard Alert notifications, greatly reducing system downtime and eliminating unnecessary service calls
- Kit contents are UL Listed sub-assemblies
- CE European Conformity

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA  
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com



## eFlow104NKA8QM

Networked Dual Voltage Access Power Controller with Power Supply/Charger



### Specifications

#### Power Supply (eFlow104NB):

<b>Input</b>	
Voltage	120VAC, 60Hz, 4.5A max.
Input Fuse	6.3A/250V
<b>Outputs</b>	
Voltage	24VDC @ 10A
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated
<b>Battery Charging</b>	
Capacity	12AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Fuse Rating	15A/32V
Failover	Upon AC loss, instantaneous
Batteries are sold separately	
<b>Fire Alarm Disconnect</b>	
Supervised	Latching or non-latching
EOL	10K Resistor
<b>Supervision</b>	
AC Failure	Form "C" contacts
Battery	Form "C" contacts
<b>Low DC Power Shutdown</b>	
Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge	

#### Indicators (LED)

AC Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

#### Network Access Power Controller (LINQ8ACM):

<b>Input</b>	
Voltage	24VDC from eFlow104NB and 12VDC from VR6
Input Fuses	15A/32V

#### Outputs

Fuse protected outputs  
Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2  
Individual outputs may be set to OFF position for servicing  
Output Fuses: 3A/32V

#### Programming Features:

##### Eight (8) Programmable Outputs:

- Fail-safe, fail-secure or auxiliary outputs
- Input controlled or manually controlled through software
- High (over) and low (under) voltage and current monitoring by output
- Multiple outputs may be programmed to be triggered by a single input
- Battery back-up by output

##### Eight (8) Programmable Trigger Inputs:

- Normally open (NO), Normally closed (NC) or Open collector sink inputs
- Wet Input (5VDC - 24VDC) with 10k resistor
- Any combination of the above

##### Other Programmable Trigger Inputs:

- Monitor power supply(ies) input for voltage and current limits (high/low)
- Input and output current calibration, Programmable timer events
- Programmable user levels, Enable or disable alerts by type
- Programmable alert reporting delay

#### Indicators (LED)

Green AC LED:	indicates AC trouble condition
Green BAT LED:	indicates battery trouble condition
Green FACP LED:	indicates FACP disconnect is triggered
Flashing Blue Heartbeat LED:	indicates network connection
Individual OUT1 - OUT8 LEDs:	indicate outputs are triggered
Individual Voltage LEDs:	indicate 12VDC (Green) or 24VDC (Red)

#### Voltage Regulator (VR6):

<b>Input</b>	
Voltage	24VDC from eFlow104NB
<b>Output</b>	
Voltage	12VDC
Current	6A continuous
Other	Surge suppression
<b>Indicators (LED)</b>	
Input	24VDC is present
Output	Powered

#### Agency Listings

##### eFlow104NX

Access Control	UL294, ULC-S319
Burglar Alarm	UL603, ULC-S318-96
Fire Alarm	UL1481
CE	European Conformity

##### VR6

Access Control	UL294, ULC-S319
CE	European Conformity

##### LINQ8ACM

Access Control	UL294
CE	European Conformity

#### Physical and Environmental

##### Dimensions (H x W x D)

Enclosure: 15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)  
Shipping: 16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

Enclosure accommodates up to two (2) 12VDC/12AH batteries

##### Weight (approx.)

Product:	9.4 lb. (4.26 kg)
Shipping:	10.5 lb. (4.76 kg)

##### Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)

##### Relative Humidity

85% +/- 5%

##### BTU/Hr. (approx.)

123 BTU/Hr.

#### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com



## eFlow104NKA8QM


Networked Dual Voltage Access Power Controller with Power Supply/Charger



### Dimensions and Drawing

Dimensions (H x W x D approximate)

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

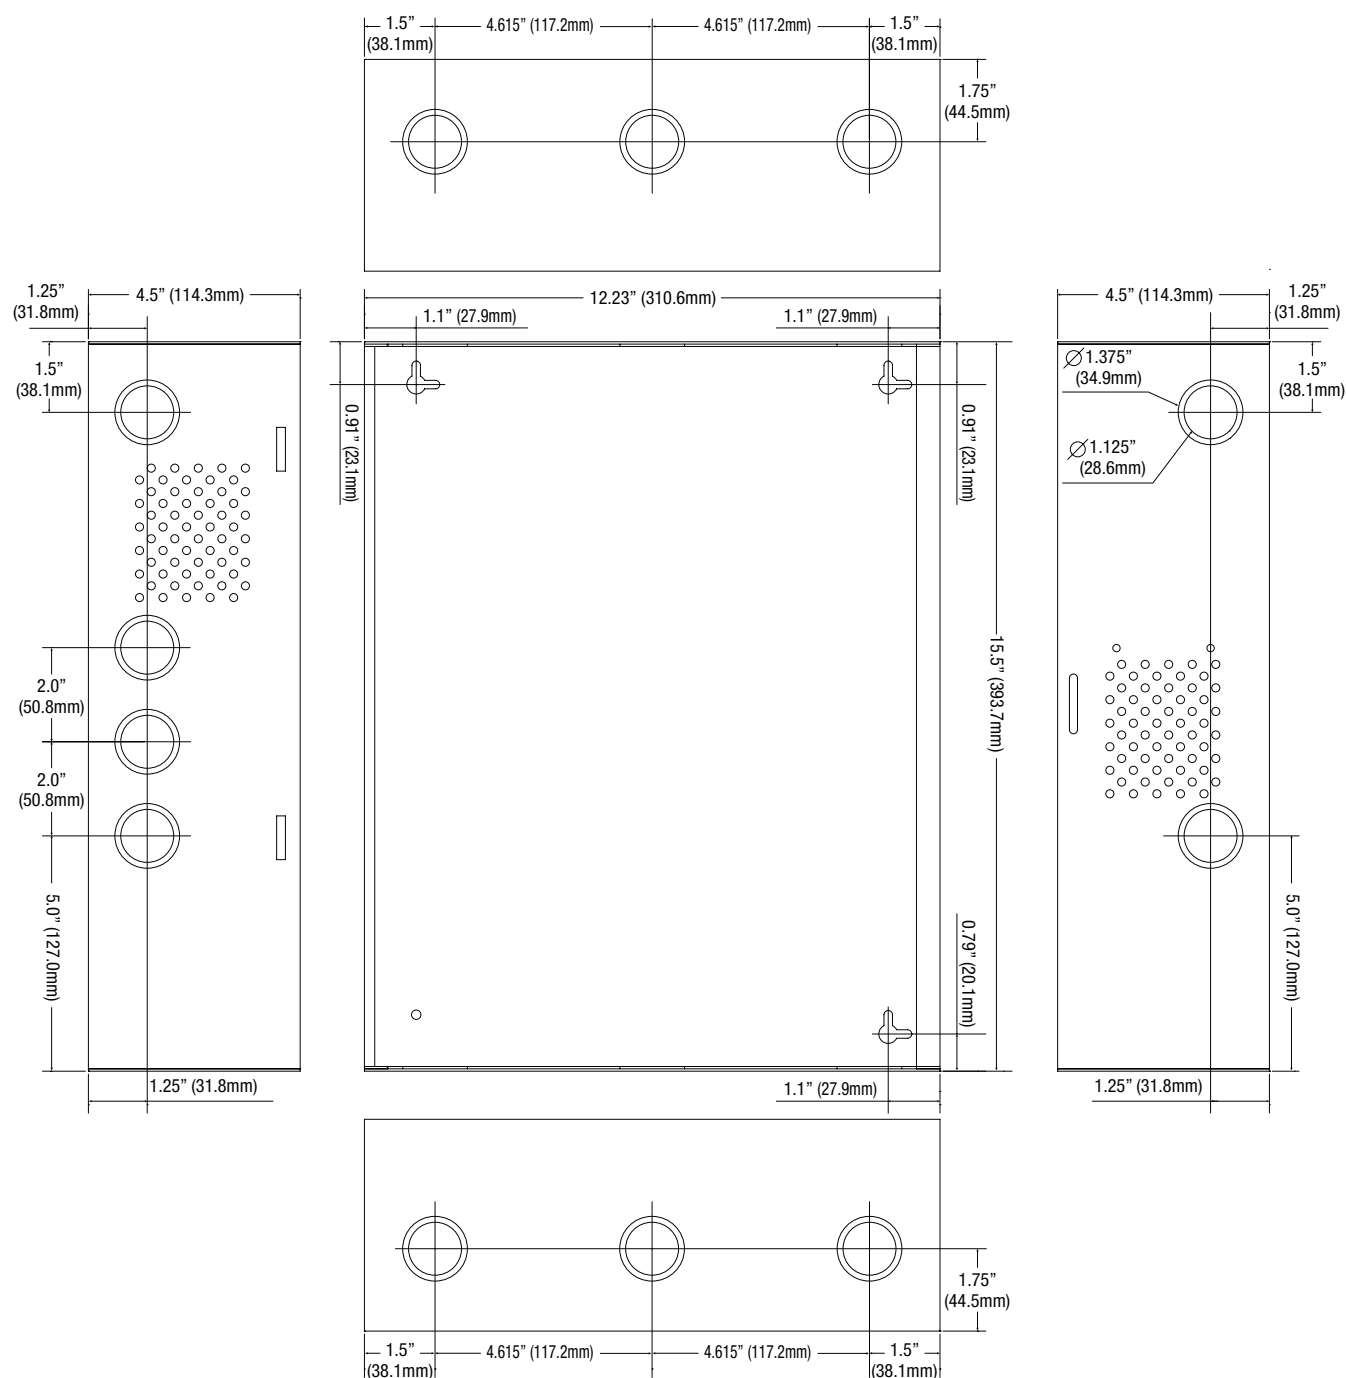

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: [info@altronix.com](mailto:info@altronix.com) | [www.altronix.com](http://www.altronix.com)