

Access & Power Integration

Altronix/Azure Wired Kits

Models Include:

T1AA3CK1

4 Door Kit with Fused Outputs
Accommodates one 4-Door Network Controller.

T1AA3CK2

2 Door Kit with Fused Outputs
Accommodates one (1) Downstream Reader Interface Board
and one (1) 2-Door Network Controller.

T1AA3CK3

4 Door Kit with Fused Outputs
Accommodates up to
two (2) Downstream Reader Interface Boards.

Each fully assembled kit includes:

- Trove1 enclosure with TAA1 Altronix/Azure backplane
- One (1) eFlow6NB - Power Supply/Charger
- One (1) ACM4 - Fused Access Power Controller
- One (1) PDS8 - Dual Input Fused Power Distribution Module
- One (1) VR6 - Voltage Regulator
- One (1) RSB1 - Rocker Switch Bracket with One (1) Rocker Switch (Not evaluated by UL)
- Wire harnesses and management

T1AA3CK1D

4 Door Kit with PTC Outputs
Accommodates one (1) 4-Door Network Controller.

T1AA3CK2D

2 Door Kit with PTC Outputs
Accommodates one (1) Downstream Reader Interface Board
and one (1) 2-Door Network Controller.

T1AA3CK3D

4 Door Kit with PTC Outputs
Accommodates up to
two (2) Downstream Reader Interface Boards.

Each fully assembled kit includes:

- Trove1 enclosure with TAA1 Altronix/Azure backplane
- One (1) eFlow6NB - Power Supply/Charger
- One (1) ACM4CB - PTC Access Power Controller
- One (1) PDS8CB - Dual Input PTC Power Distribution Module
- One (1) VR6 - Voltage Regulator
- One (1) RSB1 - Rocker Switch Bracket with One (1) Rocker Switch (Not evaluated by UL)
- Wire harnesses and management

All components of these Trove kits are UL Listed sub-assemblies.

Please refer to the included corresponding Sub-Assembly Installation Guides for further information.

Installation Guide



All registered trademarks are property of their respective owners.

Rev. 082123

Installing Company: _____ Service Rep. Name: _____

Address: _____ Phone #: _____



More than just power.™

Overview:

Altronix Trove Plus kits are pre-wired, pre-assembled and consist of Trove1AA1 enclosure/backplane with factory installed Altronix power supply/charger and sub-assemblies, wire harnesses and management.

Configuration Chart:

Altronix Model Number	120VAC 60Hz Input Current (A)	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	Nominal DC Output Voltage		Maximum Supply Current for Main and Aux. Outputs on Power Supply board and ACM4(CB) Access Power Controller's outputs	Fail-Safe/Fail-Secure Outputs	ACM4(CB) Board Input Fuse Rating	ACM4(CB) Board Output Fuse (PTC) Rating	PDS8(CB) Board Input Fuse (PTC) Rating	PDS8(CB) Board Output Fuse (PTC) Rating
				[DC]	[Aux]						
				24VDC Output Range (V)	24VDC Output Range (V)						
T1AA3CK1	3.5	5A/250V	10A/32V	20.17-26.4	20.17-26.4	24VDC @ 5.7A	4	10A/32V	3A/32V	10A/32V	3A/32V
T1AA3CK2											
T1AA3CK3											
T1AA3CK1D								9A	2.5A	9A	2.5A
T1AA3CK2D											
T1AA3CK3D											

Installation Instructions:


Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/ANSI, and with all local codes and authorities having jurisdiction. Product is intended for indoor use only.

1. Remove backplane from enclosure. Do not discard hardware.
2. Mark and predrill holes in the wall to line up with the top three keyholes in the enclosure. Install three upper fasteners and screws in the wall with the screw heads protruding. Place the enclosure's upper keyholes over the three upper screws; level and secure. Mark the position of the lower three holes. Remove the enclosure. Drill the lower holes and install the three fasteners. Place the enclosure's upper keyholes over the three upper screws. Install the three lower screws and make sure to tighten all screws.
3. Mount included UL Listed tamper switch (Altronix Model TS112 or equivalent) in desired location, opposite hinge. Slide the tamper switch bracket onto the edge of the enclosure approximately 2" from the right side (*Fig. 1, pg. 2*). Connect tamper switch wiring to the Access Control Panel input or the appropriate UL Listed reporting device. To activate alarm signal open the door of the enclosure.
4. Connect unswitched AC power (120VAC 60Hz) to RSB1. Use 14 AWG or larger for all power connections. Secure green wire lead to earth ground. Green "AC" LED on power supply board will turn on. This light can be seen through the LED lens on the door of the enclosure.

Keep power-limited wiring separate from non power-limited wiring (120VAC 60Hz Input, Battery Wires). Minimum 0.25" spacing must be provided.
CAUTION: Do not touch exposed metal parts. Shut branch circuit power before installing or servicing equipment. There are no user serviceable parts inside.
Refer installation and servicing to qualified service personnel.

5. Measure voltage before connecting devices. This helps avoiding potential damage.
6. Mount Azure modules to backplane, refer to *pages 3-5*.
7. Refer to the *eFlow Power Supply/Charger Installation Guide* for eFlow6NB and corresponding *Installation Guides* for PDS8(CB), VR6, and ACM4(CB) for further installation instructions.

Fig. 1

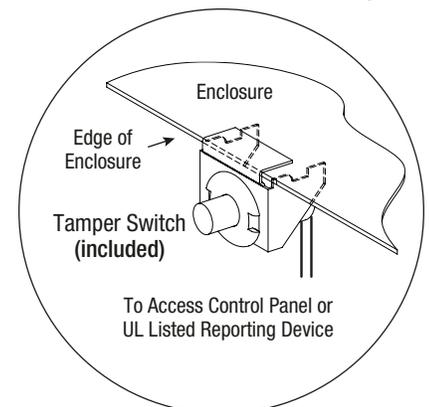

Hardware:

 Nylon Spacer |  5/16" Pan Head Screw |  Lock Nut

T1AA3CK1(D): Configuration of Azure Boards:

1. Fasten spacers (provided) to pems that match the hole pattern for Azure access controller (Fig. 2, pg. 3).
2. Mount Azure boards to spacers utilizing provided 5/16" pan head screws (Fig. 2a, pg. 3).
3. Mount backplane to enclosure with hardware.

Fig. 2

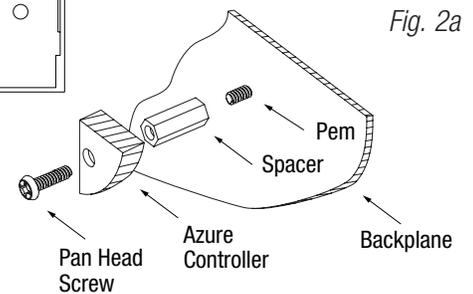
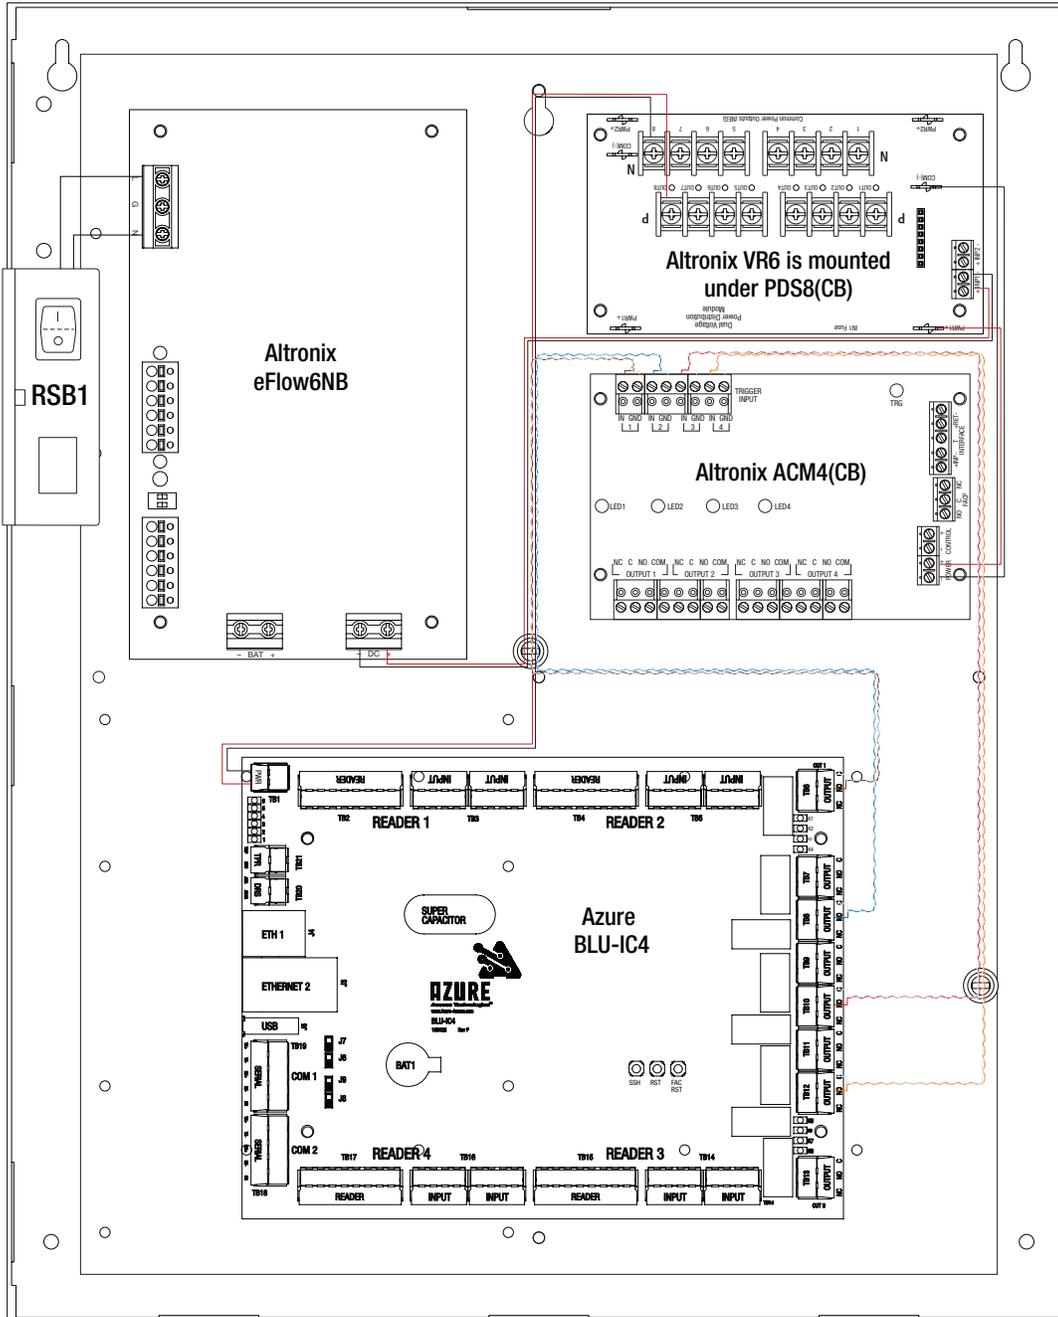


Fig. 2a

T1AA3CK2(D): Configuration of Azure Boards:

1. Fasten spacers (provided) to pems that match the hole pattern for Azure access controller (Fig. 3, pg. 4).
2. Mount Azure boards to spacers utilizing provided 5/16" pan head screws (Fig. 3a, pg. 4).
3. Mount backplane to enclosure with hardware.

Fig. 3




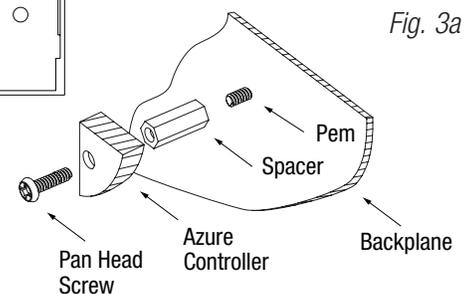


Fig. 3a

T1AA3CK3(D): Configuration of Azure Boards:


1. Fasten spacers (provided) to pems that match the hole pattern for Azure access controller (Fig. 4, pg. 5).
2. Mount Azure boards to spacers utilizing provided 5/16" pan head screws (Fig. 2a, pg. 5).
3. Mount backplane to enclosure with hardware.

Fig. 4

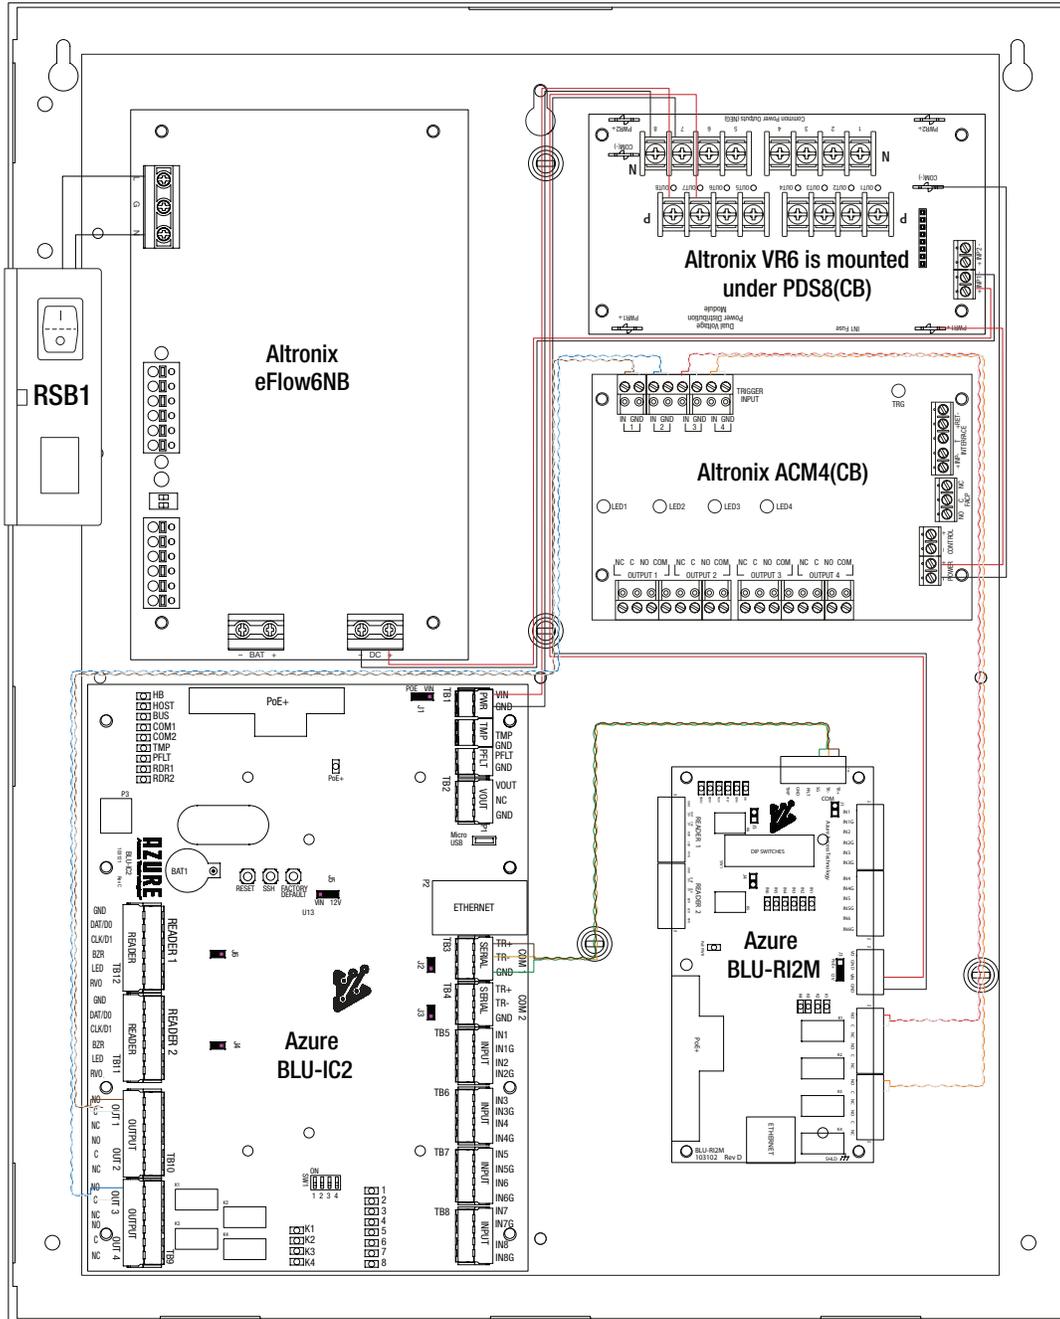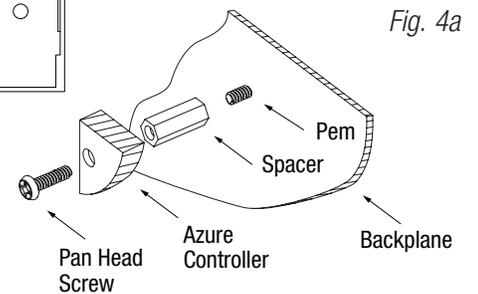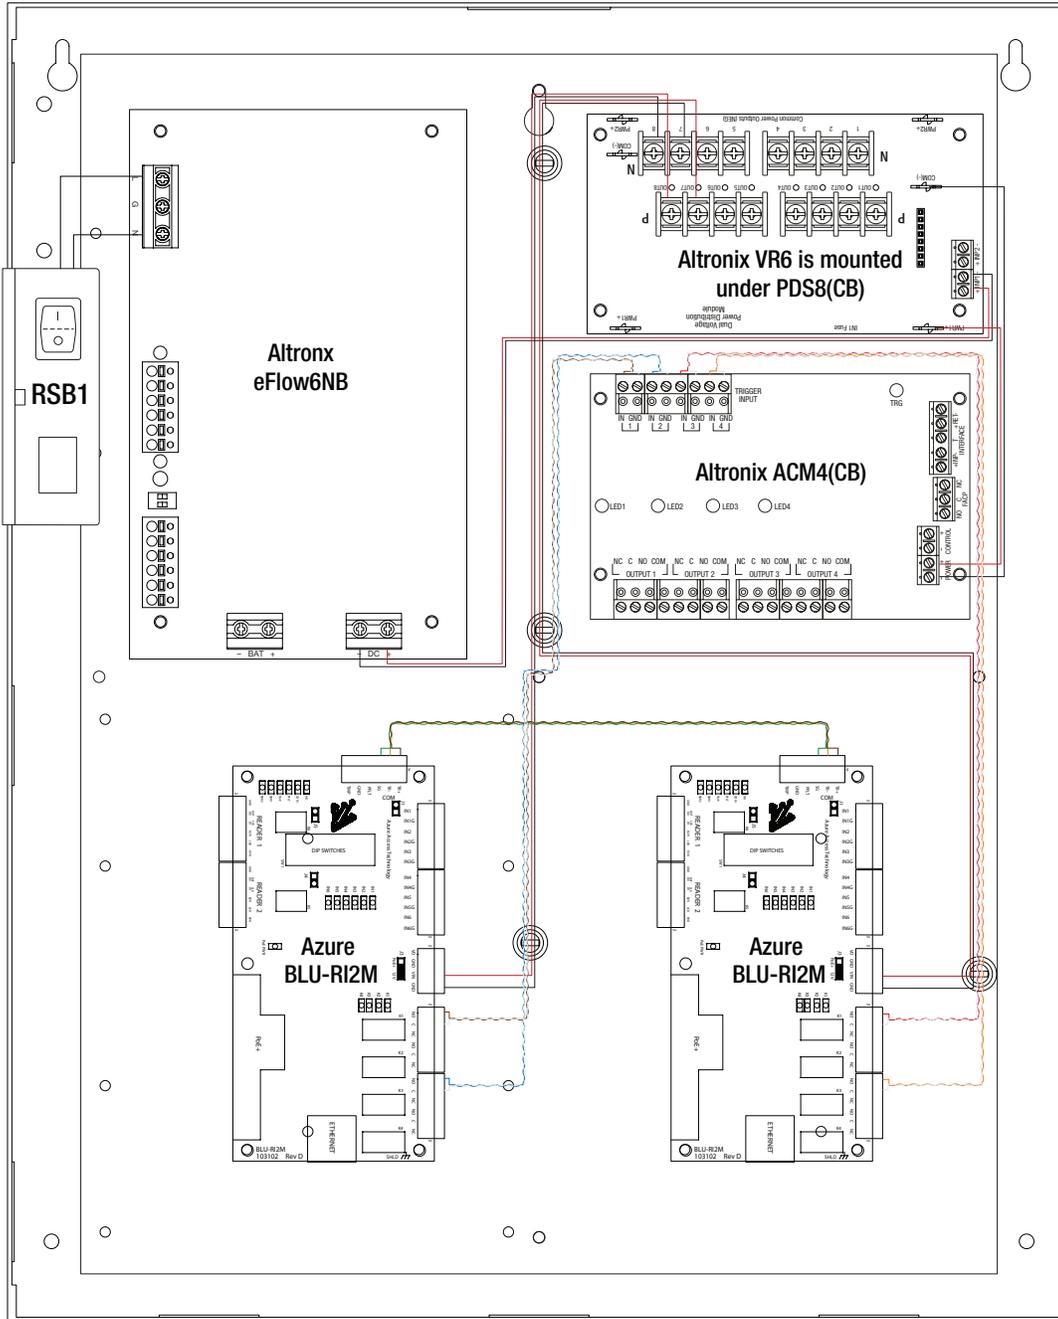



eFlow Power Supply/Chargers can be Controlled and Monitored while Reporting Power/Diagnostics from Anywhere over the Network...

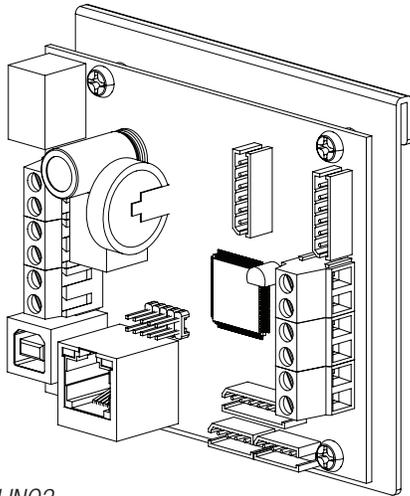

LINQ™

LINQ2 - Network Communication Module


LINQ2 provides remote IP access to real-time data from eFlow power supply/chargers to help keep systems up and running at optimal levels. It facilitates fast and easy installation and set-up, minimizes system downtime, and eliminates unnecessary service calls, which helps reduce Total Cost of Ownership (TCO) - as well as creating a new source of Recurring Monthly Revenue (RMR).

LINQ2

Features:

- UL Listed in the U.S. and Canada.
- Local or remote control of up to (2) two Altronix eFlow power output(s) via LAN and/or WAN.
- Monitor real time diagnostics: DC output voltage, output current, AC & battery status/service, input trigger state change, output state change and unit temperature.
- Access control and user management: Restrict read/write, Restrict users to specific resources
- Two (2) integral network controlled Form "C" Relays.
- Three (3) programmable input triggers: Control relays and power supplies via external hardware sources.
- Email and Windows Dashboard notifications
- Event log tracks history.
- Secure Socket Layer (SSL).
- Programmable via USB or web browser - includes operating software and 6 ft. USB cable.


LINQ2 Mounts Inside any Trove Enclosure

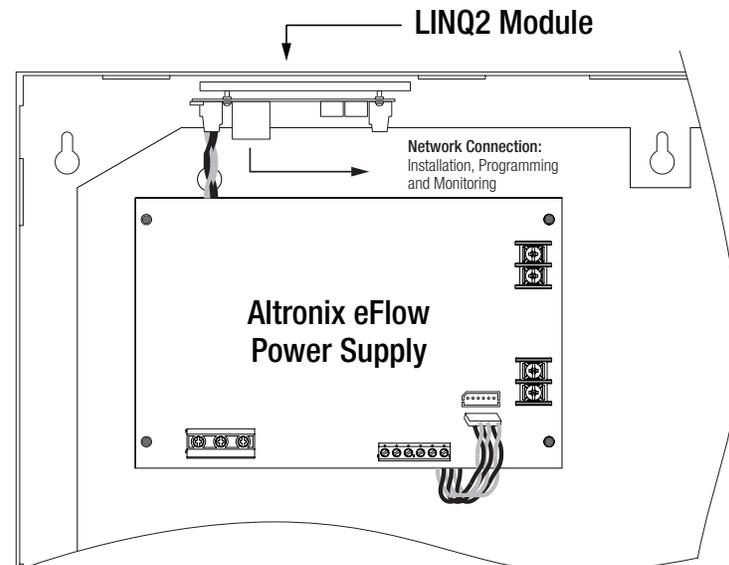

Notes:

Trove1 Enclosure Dimensions (H x W x D approximate):

18" x 14.5" x 4.625" (457mm x 368mm x 118mm)

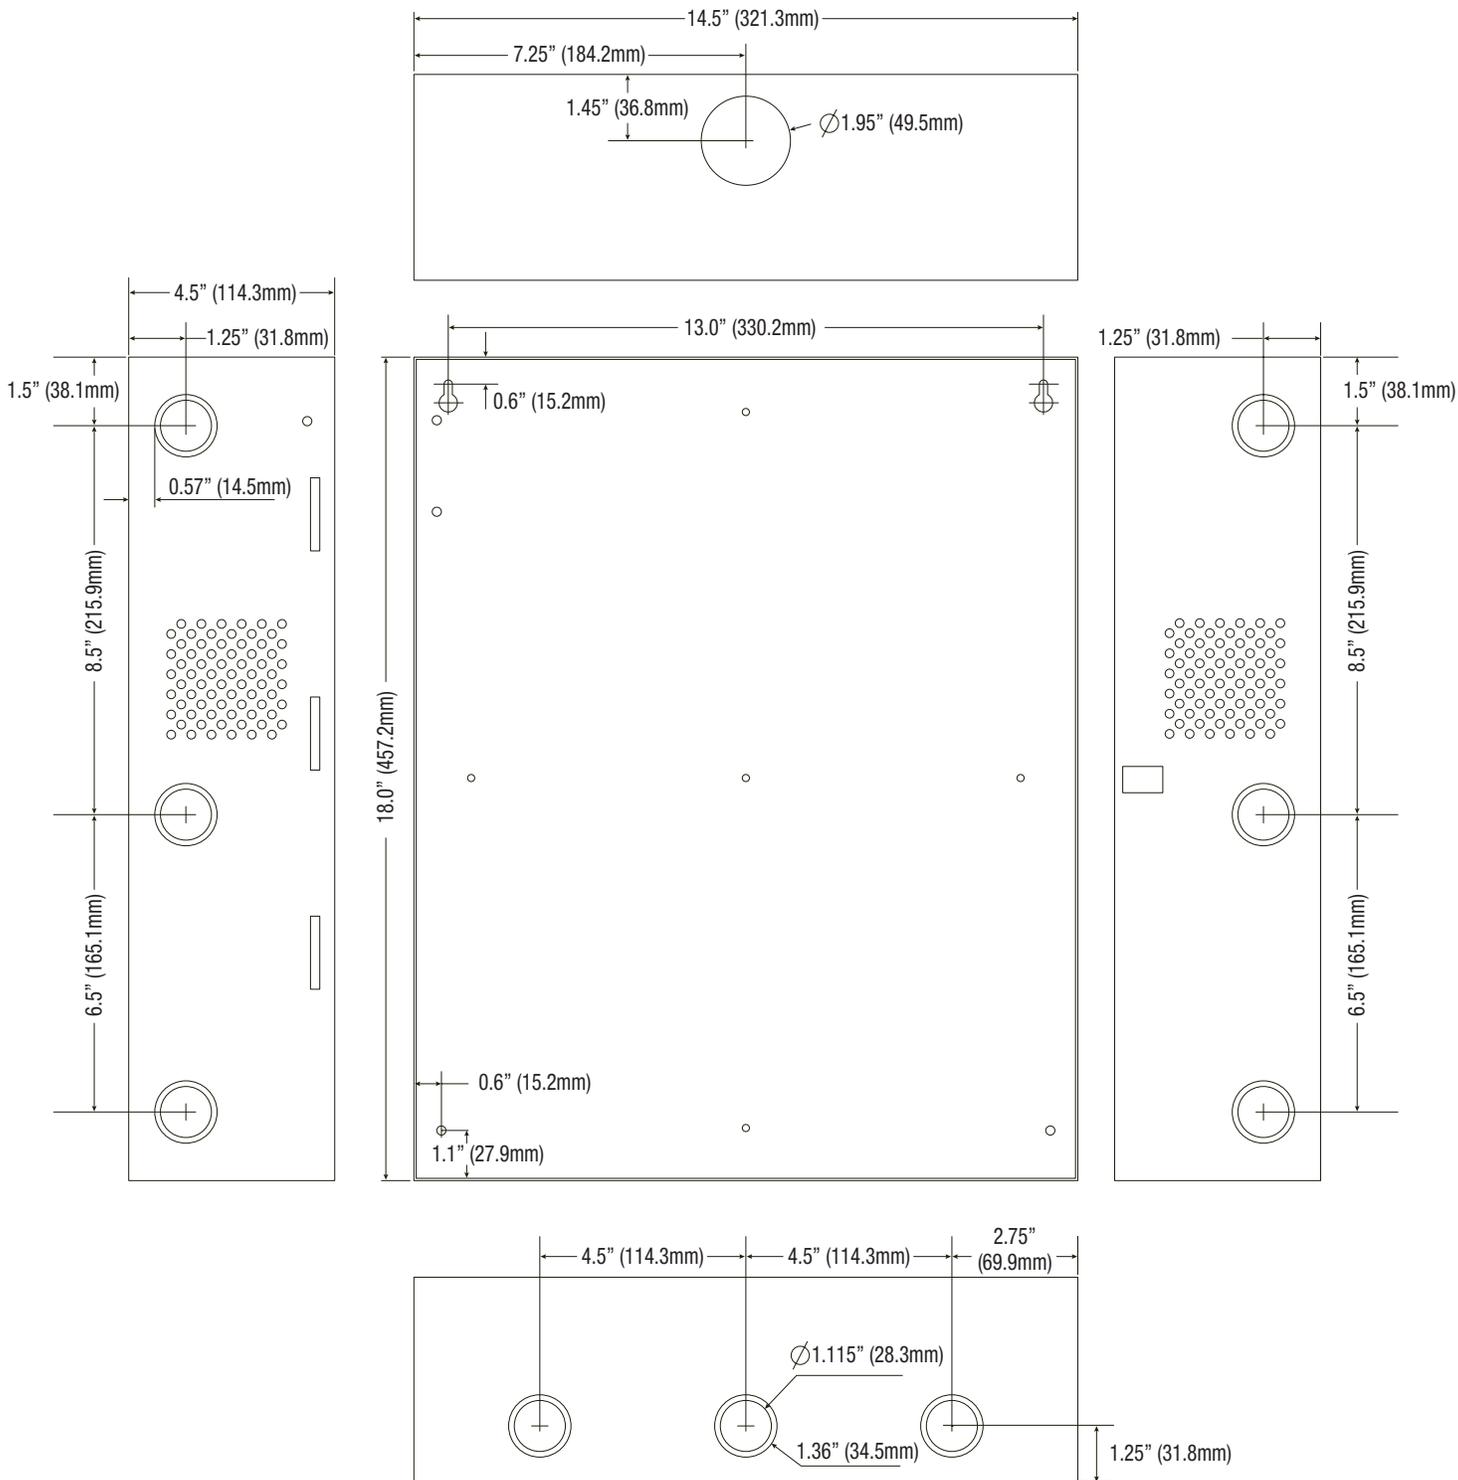

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
 website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty
 IIT1AA3CK Series

H21W

