



Access & Power Integration

T1RAG3F8

8 Door Altronix/AMAG M4000 Kit with Fused Outputs

Fully assembled kit includes:

- Trove1R rack enclosure with TAG1R Altronix/AMAG backplane
- (1) eFlow6NB - Power Supply/Charger
- (1) VR6 - Voltage Regulator
- (1) ACMS8 - Fused Dual Input Access Power Controller

All components of this Trove kit are UL Listed sub-assemblies.

Please refer to the included corresponding Sub-Assembly Installation Guides for further information.

Installation Guide

All registered trademarks are property of their respective owners.



Rev. T1RAG3F8_031021

More than just power.™

Installing Company: _____ Service Rep. Name: _____

Address: _____ Phone #: _____

Overview:

Altronix T1RAG3F8 Trove rack kit is pre-assembled and consist of Trove rack enclosure/backplane with factory installed Altronix power supply/charger and sub-assemblies. Kits accommodate up to two (2) AMAG M4000 modules for up to eight (8) doors in a single enclosure.

Configuration Chart:

Altronix Model Number	120VAC 60Hz Input Current	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	Nominal DC Output Voltage		Maximum Supply Current for Main and Aux. Outputs on Power Supply board and ACMS8 Access Power Controller's outputs	Fail-Safe/ Fail-Secure or Dry Form "C" Outputs	ACMS8 Board Input Fuse Rating	ACMS8 Board Output Fuse Rating
				[DC]	[Aux]				
				Output Range (VDC)	Output Range (VDC)				
T1RAG3F8	3.5A	5A/ 250V	15A/ 32V	20.17- 26.4	20.28- 26.4	24VDC @ 5.4A	8	15A/ 32V	3A/ 32V

Hardware and Accessories:



Specifications:

Agency Listings:

- CE European Conformity.

Mechanical:

- Black enclosure with ample knockouts for convenient access.
- Includes: tamper switch, cam lock and mounting hardware.
- Modular 2U standard EIA 19" drawer with extendable slides up to 48".
- Dimensions (H x W x D): 3.375" x 19.0" x 26.5" (85.8mm x 482.6mm x 673.1mm)

Included Accessories:

- One (1) tamper switch (Altronix Model TS112 or equivalent).
- Cam lock.

Available Accessories (not included):

- RE2: Rack Mount Battery Enclosure accommodates up to four (4) 12VDC/7AH batteries.
- WM5, WM25, WM100: Magnetic Cable Tie Mounts (5, 25, 100 counts).

Installation Instructions for T1RAG3F8:

Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/ANSI, and with all local codes and authorities having jurisdiction. These products are for indoor use only and must be installed within the protected premises.

Note: First assemble and install Z Bracket Wire Management Accessory (refer to Z Bracket Installation pg. 4)


1. Remove backplane from enclosure prior to installing into rack cabinet (do not discard hardware).
2. In order to mount included UL Listed tamper switch (Altronix Model TS112 or equivalent) turn the enclosure upside down. Punch out the knockout in designated location, on the back of the unit, from outside of the drawer (Fig. 1, pg. 3). Insert the tamper switch into the knockout from outside of the drawer with the button facing outwards and spaded connectors inside the drawer. Connect tamper switch wiring to the Access Control Panel input or the appropriate UL Listed reporting device.

To activate alarm signal open the rack drawer.

3. Slide the rack enclosure into an open 2U location in the four post rack cabinet.
4. Utilizing proper fasteners attach front ears to the rack rails.
5. Attach the rear of the adjustable slides to the rear rails of the rack cabinet with the proper fasteners.
6. Secure the rack cover (Fig. 2a, pg. 3) and rack drawer to earth ground (Fig. 2b, pg. 3).


Fig. 1

Back of the drawer,
viewed from outside.



Tamper Switch
mounting location

Fig. 2

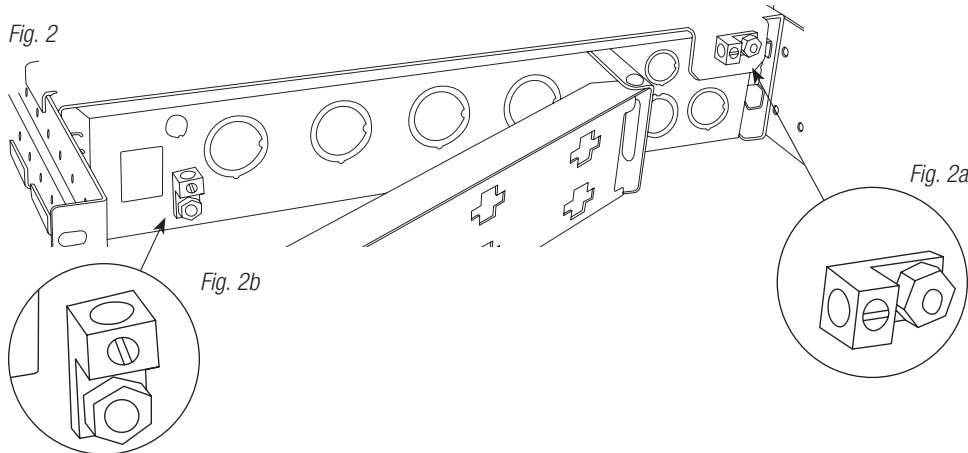

7. Ensure that all internal configurations (voltage selection, switch settings, etc.) are completed before mounting backplane back into Trove rack enclosure.
8. Refer to the eFlow Power Supply/Charger Installation Guide for eFlow6NB, and corresponding Sub-Assembly Installation Guide for ACMS8 and VR6 for further installation instructions.

Assembling and Attaching Z Bracket Wire Management Accessory (included):

Altronix Trove Rack enclosures include Z Bracket, a convenient and reliable wire management accessory.

Hardware (included):



Ten (10) bolts and



eight (8) lock nuts.

1. Carefully unpack Z Bracket. Do not discard hardware (included) (*Fig. 3, pg. 4*).
2. Attach arms to each other using bolts and lock nuts (*Fig. 3a, pg. 4*).
3. Attach the hinge brackets to the ends of arms using bolts and nuts positioning them as shown on (*Fig. 3b, pg. 4*).
4. Make sure that all nuts are tightened.

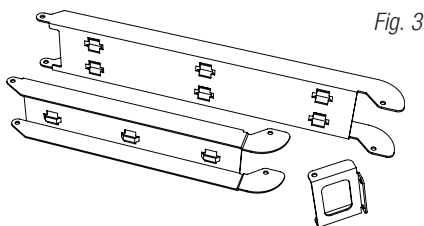


Fig. 3

Two (2)

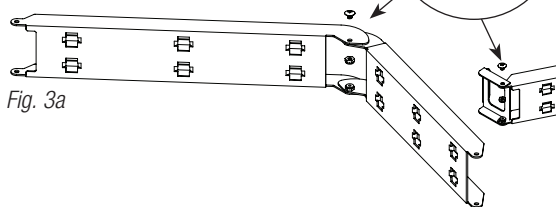


Fig. 3a




Fig. 3b

5. Attach the hinge bracket on the longer side of Z Bracket to the adjustable slide using bolts and lock nuts (included) (*Fig. 4, 4a, pg. 4*).
6. Attach the hinge bracket on the shorter side of Z Bracket to the rear of the rack enclosure using bolts (included).

Fig. 4


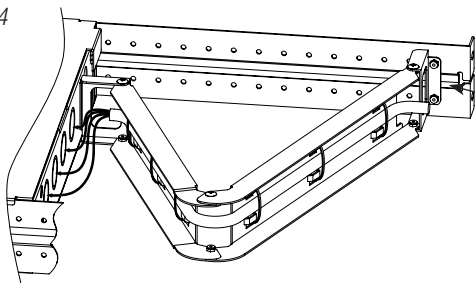


Fig. 4a

T1RAG3F8:

Configuration of AMAG M4000 Modules

1. Align the AMAG M4000 modules on the backplane to match the boards' mounting holes with corresponding pems.
2. Fasten spacers (provided) onto metal pems (Fig. 5a, pg. 3).
3. Mount AMAG M4000 modules to spacers utilizing pan head screws (provided) (Fig. 5a, pg. 3).
Note: AMAG M4000 modules have one (1) screen. Please make sure that they are mounted correctly, as shown in Fig. 5 below.
4. Fasten TAG1R backplane to Trove1R rack enclosure utilizing hardware (provided).

Fig. 5


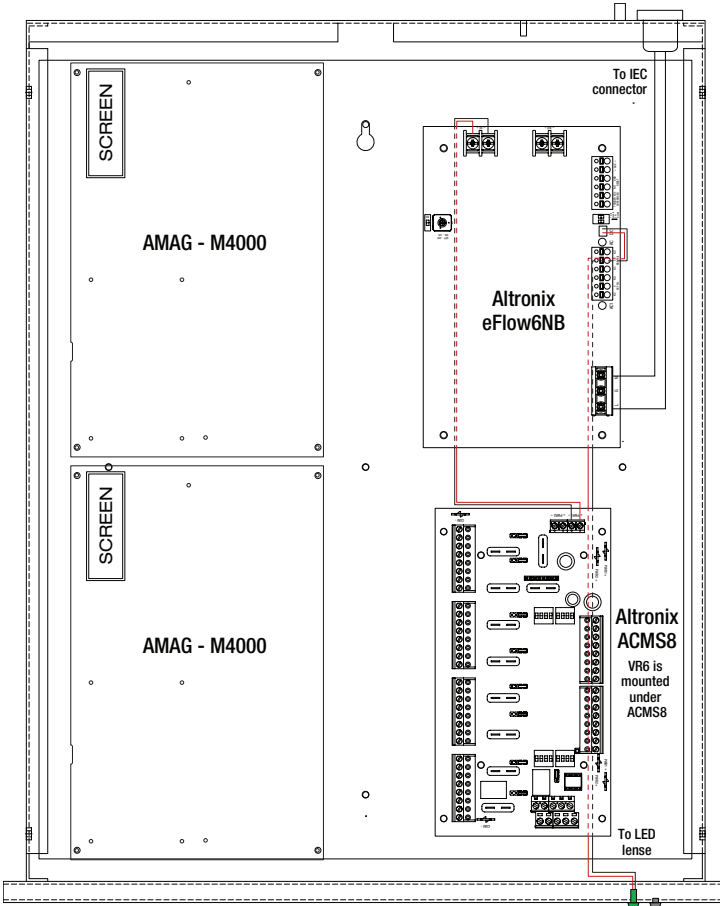


Fig. 5a

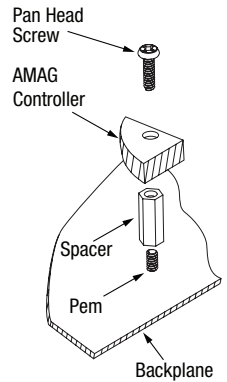

Notes:

Notes:

3.375" x 19.0" x 26.5" (85.8mm x 482.6mm x 673.1mm). Shown with Z Bracket attached.

