


### Specifications:


- UL Listed Burglar Alarm System Accessory (UL365).
- 12VDC or 24VDC selectable operation.
- Coil draws 30mA.
- 3VDC to 24VDC 2mA positive (+) trigger.
- 1 amp/28VDC SPDT contacts.
- Includes snap track (ST1).

Board dimensions: 2.75"L x 2"W x 1"H

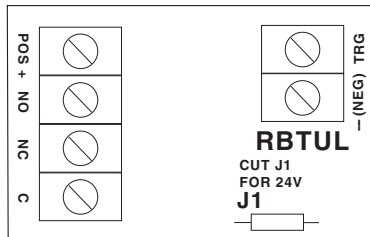

### Installation Instructions:

1. Mount relay in desired enclosure. Secure snap track with screws. Be sure to provide enough clearance between PC board and snap track mounting screw head to avoid short circuit.
  2. Connect DC input to terminals marked [+ (POS) ] and [ -(NEG) ].
  3. Connect DC + positive input trigger to terminal marked [TRG].
- Note:** If using isolated trigger connect negative (-) side of trigger voltage to terminal marked [(NEG) -].
4. For 24VDC operation cut J1 on relay module.

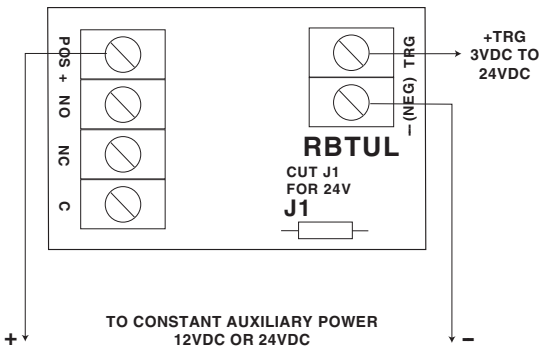

Altronix is not responsible for any typographical errors.