

Maximal FV Series

Single Power Supply Access Power Controllers (Fused)



Altronix Maximal FV Series Access Power Controllers distribute and switch power to access control systems and accessories. They convert a 220VAC 50/60Hz input into sixteen (16) independently controlled 12VDC or 24VDC fuse protected outputs. These Fail-Safe/Fail-Secure power outputs may be converted to dry form “C” contacts. The outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Keypad, Push Button, REX PIR, etc. Units will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the sixteen (16) outputs.



Maximal5FV

Key Features

- Sixteen (16) independently controlled outputs
 - Output options:
 - a) Sixteen (16) Fail-Safe and/or Fail-Secure power outputs
 - b) Sixteen (16) form “C” 5A rated relay outputs
 - c) Any combination of the above
- Sixteen (16) auxiliary power outputs (unswitched)
- Output fuses are rated @ 2.5A
- Filtered and electronically regulated outputs
- Supervision:
 - AC Fail
 - Battery Fail and Battery Presence
 - Low power shutdown
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the sixteen (16) outputs
- Alarm output relay indicates that FACP input is triggered
- Fire Alarm disconnect input options:
 - a) Normally open (NO) or normally closed (NC) dry contact input
 - b) Polarity reversal input from FACP signaling circuit
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- CE European Conformity
- Lifetime Warranty

Accessories (order separately)



LINQ2

LINQ2 – Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

Lifetime Warranty

Maximal FV Series

Single Power Supply Access Power Controllers (Fused)



Maximal FV Single Power Supply Series Configuration Reference Chart

| Altronix Model Number | 220VAC 50/60Hz Input Current Draw (A) | Power Supply Board Input Fuse Rating | Power Supply Board Battery Fuse Rating | Nominal DC Output Voltage | | | | Maximum Supply Current for Main and Aux. Outputs on Power Supply board and ACM8 Access Power Controller's outputs (A) | Fuse Protected Non Power-Limited Outputs | Current Per ACM8 Output (A) | ACM8 Board Input Fuse Rating | ACM8 Board Output Fuse Rating |
|-----------------------|---------------------------------------|--------------------------------------|--|---------------------------|------------------------|------------------------|------------------------|---|--|-----------------------------|------------------------------|-------------------------------|
| | | | | [DC] | | [Aux] | | | | | | |
| | | | | 12VDC Output Range (V) | 24VDC Output Range (V) | 12VDC Output Range (V) | 24VDC Output Range (V) | | | | | |
| Maximal3FV | 2.1 | 5A/250V | 10A/32V | 10.0-13.2 | 20.19-26.4 | 10.03-13.2 | 20.19-26.4 | 12VDC @ 4.6A or 24VDC @ 5.2A | 16 | 2.5 | 10A/250V | 2.5A/250V |
| Maximal5FV | 2.1 | 5A/250V | 15A/32V | 10.03-13.2 | – | 10.03-13.2 | – | 8.6A | | 2.5 | 10A/250V | 2.5A/250V |
| Maximal7FV | 2.7 | 6.3A/250V | 15A/32V | – | 20.17-26.4 | – | 20.28-26.4 | 9.2A | | 2.5 | 10A/250V | 2.5A/250V |

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com



Maximal FV Series

Single Power Supply Access Power Controllers (Fused)



Specifications

Input

Voltage 220VAC (working range 198VAC - 256VAC), 50/60Hz

Input Fuse Varies, see Reference Chart

Outputs

Voltage 12VDC or 24VDC, see Reference Chart

Current Varies, see Reference Chart

Output Fuses 3.5A/250V

Auxiliary 3.5A (unswitched)

Other Overvoltage protection
Filtered and regulated outputs

Battery Charging

Capacity 12AH/12VDC (4 within enclosure)
40AH/65AH (requires separate enclosure)

Type Sealed lead acid or gel type

Fuse Rating Varies, see Reference Chart

Failover Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect

Supervised Latching or non-latching, individually selectable for any or all of the sixteen (16) outputs

EOL 10K Resistor

Supervision

AC Failure Form "C" contacts

Battery Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply)
Prevents deep battery discharge

Indicators (LED)

Input 220VAC is present

DC Output Powered

Relays Individual LEDs indicate outputs are triggered (relays energized)

FACP Indicates FACP disconnect is triggered

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:

26" x 19" x 6.25" (660.4mm x 482.6mm x 158.8mm)

Shipping:

31" x 23" x 8.25" (787.4mm x 584.2mm x 209.6mm)

Enclosure accommodates up to four (4) 12VDC/12AH batteries

Weight (approx.)

| Model | Product Weight | Shipping Weight |
|------------|---------------------|---------------------|
| Maximal3FV | 42.3 lb. (19.17 kg) | 46.3 lb. (21.00 kg) |
| Maximal5FV | 42.3 lb. (19.17 kg) | 46.3 lb. (21.00 kg) |
| Maximal7FV | 43.5 lb. (19.73 kg) | 47.5 lb. (21.55 kg) |

Temperature

Operating: 0°C to 49°C (32°F to 120°F)

Storage: - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.)

| Model | 12VDC | 24VDC |
|------------|-------|-------|
| Maximal3FV | 28 | 64 |
| Maximal5FV | 53 | N/A |
| Maximal7FV | N/A | 113 |

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Maximal FV Series


Single Power Supply Access Power Controllers (Fused)



Dimensions and Drawing

Dimensions (H x W x D approximate)

26" x 19" x 6.25" (660.4mm x 482.6mm x 158.8mm)

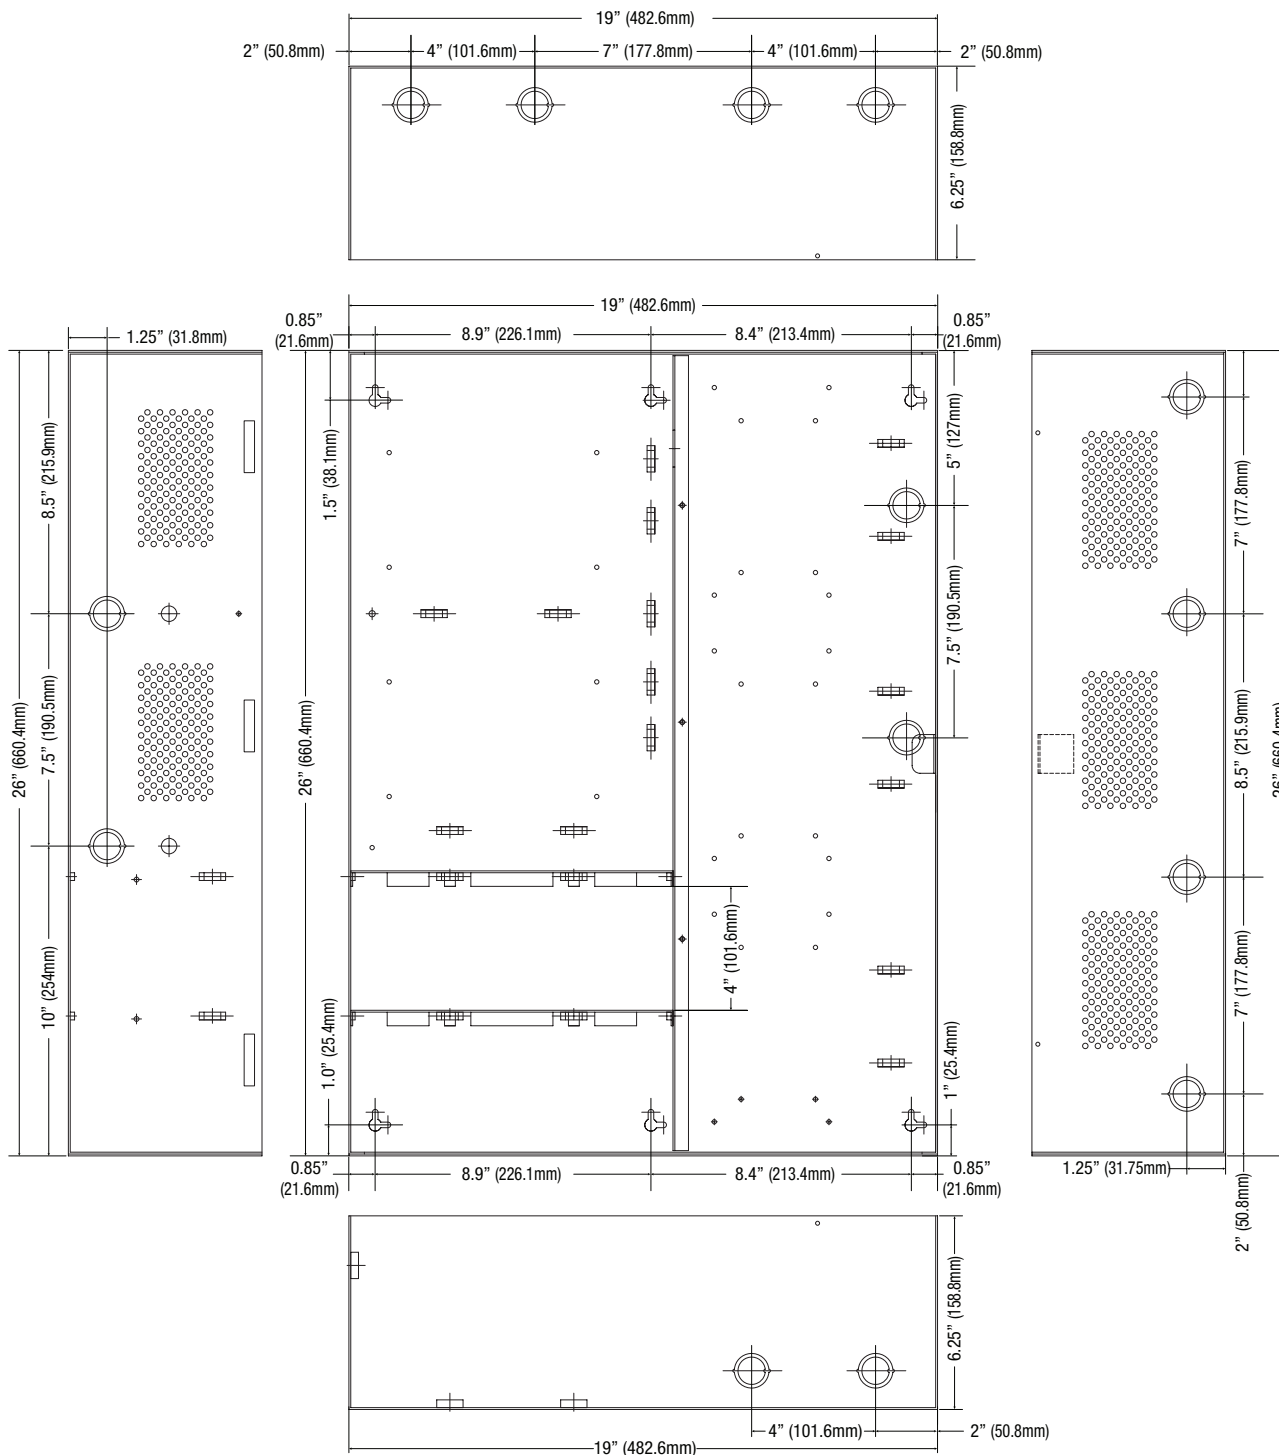

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com