


ALTV615DC8ULCB

DC CCTV Power Supply

Altronix ALTV615DC8ULCB is designed with eight (8) individual Class 2 Rated PTC protected power-limited outputs for powering CCTV cameras and other video accessories. It provides 6VDC-15VDC with a total of up to 4A continuous supply current.

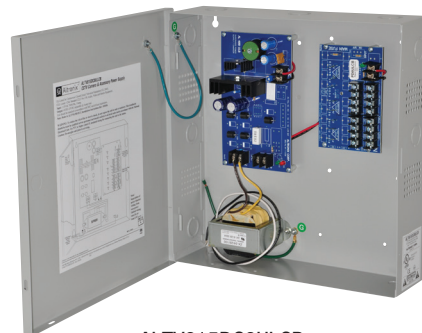

ALTV615DC8ULCB

Key Features

- Eight (8) PTC protected power-limited outputs (auto-resettable).
- 6-15VDC field adjustable output voltage
- Filtered and electronically regulated outputs
- Short circuit and thermal overload protection
- AC Input and DC Output LED indicators
- Power ON/OFF switch
- Spare fuses provided
- UL Listed in the U.S. and Canada
- CE European Conformity
- Model with factory installed 3-wire line cord is available (ALTV615DC8ULCB3)
- Lifetime Warranty

Specifications

Input

Voltage 115VAC, 50/60Hz, 0.9A

Outputs

Voltage 6-15VDC

Current Up to 4A

Outputs Rating 2.5A/250VAC

Indicators (LED)

Input LED

Output LED

Agency Listings

Commercial CCTV Equipment UL2044

Audio, Video and Similar Equipment CSA Standard C22.2 No.1-98

CE European Conformity

Physical and Environmental

Dimensions (H x W x D):

13.5" x 13" x 3.25" (342.9mm x 330.2mm x 82.55mm)

Weight:

Product Weight 11.5 lb. (5.22 kg)

Shipping Weight 12.0 lb. (5.44 kg)

Temperature:

Operating 0°C to 49°C (32°F to 120°F)

Storage -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/-5%

BTU/Hr.: 12-31 BTU/Hr., depending on output

Lifetime Warranty