


DL1

Door Control Timer

Altronix DL1 is a 1 second to 1 minute door control timer that is used for basic door operation. This timer can be activated with a momentary or maintained trigger.

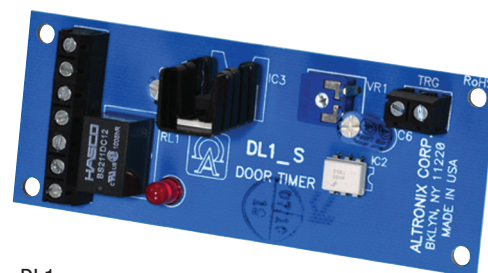

DL1

Specifications

Input

Voltage 12 or 24VAC or VDC operation

Relay

Contact Rating 2A/120VAC or 28VDC contacts
 Dry relay output
 12VDC regulated beeper output

Timer

Isolated AC or DC voltage 5V - 24V trigger
 Quick and extremely accurate time range adjustment from 1 second to 1 minute
 Momentary or maintained trigger

Indicators (LED)

Red Indicates relay is energized

Physical and Environmental

Dimensions (L x W x H)

4" x 1.5" x 0.75" (101.6mm x 38.1mm x 19.05mm).

Product Weight 0.1 lb. (0.05 kg)

Shipping Weight 0.15 lb. (0.07 kg)

Temperature


Operating -20°C to 49°C (-4°F to 120°F)

Storage -25°C to 70°C (-13°F to 158°F)

Relative Humidity 85% +/-5%

Board Dimensions (L x W x H) and Drawing

4" x 1.5" x 0.75" (101.6mm x 38.1mm x 19.05mm)

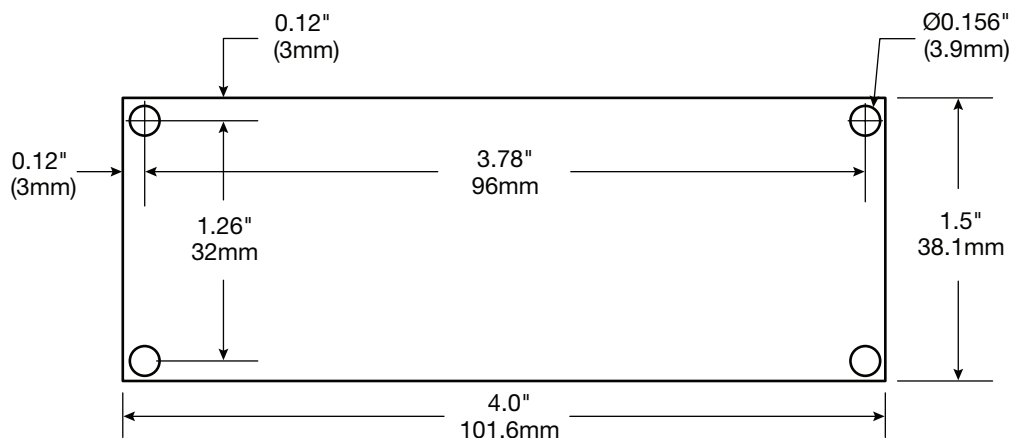

Lifetime Warranty