

# T1AXK3F4 (Kit)

## Access & Power Integration Solution for Axis Communications



Altronix T1AXK3F4 kit consists of Trove1 enclosure, TDR1 DIN Rail/Altronix backplane with one (1) 24VDC @ 6A power supply/charger, one (1) fused access power controller, one (1) voltage regulator and one (1) dual input fused power distribution module. This kit also accommodates one (1) A1710B for up to four (4) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T1AXK3F4

*Axis Communications boards are not included*

### Key Features

- 24VDC power supply/charger
- Accommodates one (1) A1710B module
- Convenient knockout configuration:
  - One (1) double knockout  
1.948" (1-1/2" Conduit) / 1.701" (1-1/4" Conduit)
  - Nine (9) double knockouts  
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to two (2) 12VDC/7AH batteries
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
  - UL: UL294 - Access Control System
  - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

### Accessories (order separately)



LINQ2

#### LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

#### WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

#### MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/accessories in any metal enclosure or backplane.

**Specifications**

**Power Supply/Charger (eFlow6NB):**

<b>Input</b>	
Voltage	120VAC, 60Hz, 3.5A max.
Input Fuse	5A/250V
<b>Outputs</b>	
Voltage	12VDC or 24VDC selectable
Current	6A continuous max.
Auxiliary	Power-limited @ 1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

**Battery Charging**

Capacity	7AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

**Fire Alarm Disconnect**

Supervised	Latching or non-latching
EOL	10K Resistor

**Supervision**

AC Failure	Form "C" contacts
Battery	Form "C" contacts

**Low DC Power Shutdown**  
 Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

**Indicators (LED)**

Input	120VAC is present
DC Output	Powered

**Access Power Controller (ACM4):**

<b>Input</b>	
Voltage	24VDC from eFlow6NB
Input Fuse	10A/32V
<b>Outputs</b>	
Voltage	24VDC
Four (4) independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	
Output Fuses	3A/32V

**Indicators (LED)**

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

**Voltage Regulator (VR6):**

<b>Input</b>	
Voltage	24VDC from eFlow6NB
<b>Output</b>	
Voltage	12VDC
Current	6A continuous
Other	Surge suppression
<b>Indicators (LED)</b>	
Input	24VDC is present
Output	Powered

**Dual Input Power Distribution Module (PDS8):**

<b>Input</b>	
Voltage	24VDC from eFlow6NB and 12VDC from VR6
Input Fuses	10A/32V

<b>Outputs</b>	
Voltage	12VDC and/or 24VDC
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output Fuses	3A/32V

<b>Indicators (LED)</b>	
DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

**T1AXK3F4 Kit:**


**Agency Listings**  
 All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.  
 CE European Conformity

**Physical and Environmental:**

<b>Dimensions (H x W x D)</b>	
Enclosure:	18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)
Shipping:	21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)
<b>Weight (approx.)</b>	
Product:	15.5 lb. (7.0 kg)
Shipping:	19.5 lb. (8.9 kg)
<b>Temperature</b>	
Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)
Relative Humidity	85% +/- 5%
BTU/Hr. (approx.):	87 BTU/Hr.

**Access Controller Position Chart for the Following Models:**

Altronix/Axis Communications	Pem Mounting
Axis 1710B	(A)

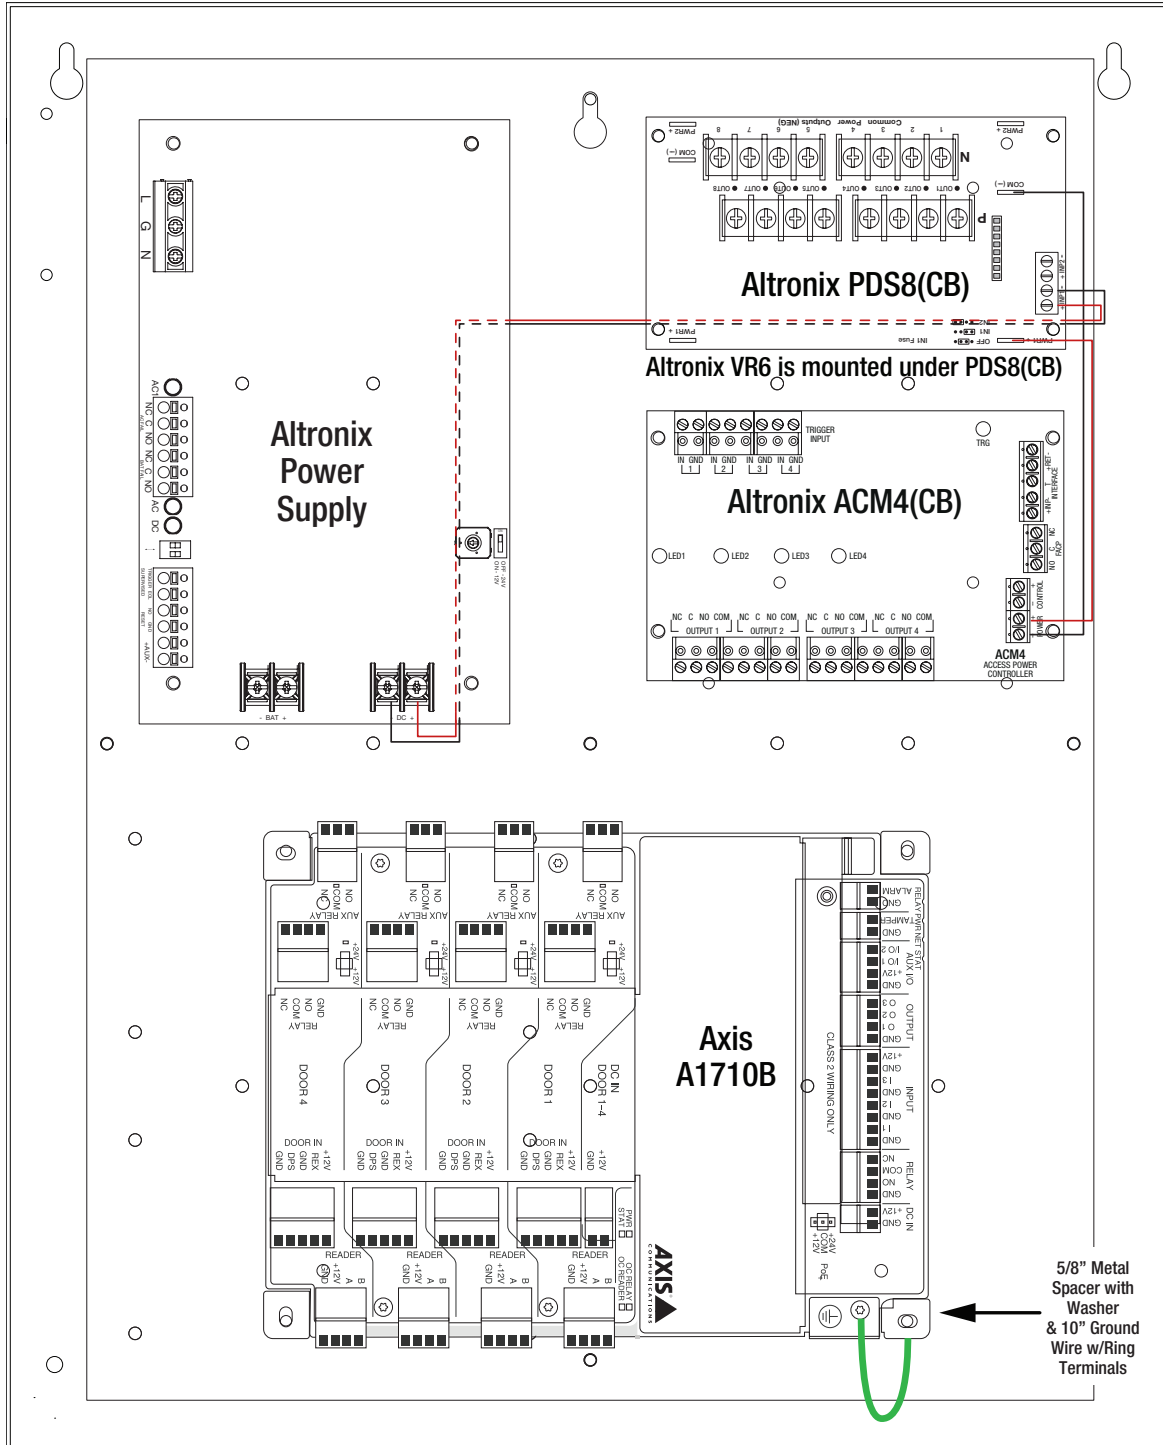

**Dimensions and Drawing**

Dimensions (H x W x D approximate)  
 18.0" x 14.5" x 4.625" (457.2mm x 368.3mm x 118mm)

