Altronix®

Rev. 10132022

T1M1LCK1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Altronix T1M1LCK1D is a 4-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T1M1LCK1D accommodates one (1) Intelligent Dual Reader Controller and one (1) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

*Also compatible with these authentic Mercury partners:
AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicard, IMRON, Johnson Controls, Kastle, Keri Systems, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt

Mercury™

T1M1LCK1D - includes AL400ULXB2, PDS8CB, VR6, ACM4CB, wire harnesses and wire magnets

Mercury modules are not included

Key Features

- Accommodates the following Mercury controllers:
  1 - LP1502 / LP4502 and 1 - MR52
- Convenient knockout configuration:
  - One (1) knockout - 1-1/2" Conduit
  - Nine (9) double knockouts - 3/4" Conduit and 1" Conduit
- Unit includes:
  - Removable backplane
  - Wire management
  - Custom wire assemblies for power distribution with terminal blocks for controller connections
- Supervision
  - AC Fail
  - Battery Fail and Battery Presence
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
  - UL: UL294 - Access Control System
  - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to two (2) 12VDC/7AH batteries
- Lifetime Warranty*

Altronix Power Supply/Chargers and Sub-Assemblies only

Accessories (order separately)

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/accessories in any metal enclosure or backplane.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T1M1LCK1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Specifications

Power Supply (AL400ULXB2):

Input

Voltage	115VAC, 60Hz, 3.5A max
Input Fuse	5A/250V

Output

Voltage	12VDC or 24VDC selectable
Current	4A @ 12VDC or 3A @ 24VDC continuous max
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	7AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Batteries are sold separately

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Dual Input Power Distribution Module (PDS8CB)

Input

Voltage	12VDC from VR6 and 24VDC from AL400ULXB2
Input PTCs	9A

Outputs

Voltage	12VDC and/or 24VDC

Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs	2.5A

Indicators (LED)

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

Voltage Regulator (VR6):

Input

Voltage	24VDC from AL400ULXB2

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Access Power Controller (ACM4CB):

Input

Voltage	24VDC from AL400ULXB2
Input PTC	9A

Outputs

Voltage	24VDC

Four (4) independently controlled PTC outputs:

a) Fail-Safe and/or Fail-Secure power outputs
Form "C" Relays rated 28VAC or VDC @ 2.5A

b) Auxiliary power outputs (unswitched)

c) Any combination of the above

Output PTCs	2.5A

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T1M1LCK1D Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE	European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)
Shipping:
21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

Weight (approx.)

Product	18.0 lb. (8.17 kg)
Shipping	22.0 lb. (9.98 kg)

Temperature

Operating	0ºC to 49ºC (32ºF to 120ºF)
Storage	– 20ºC to 70ºC (– 4ºF to 158ºF)
Relative Humidity	85% +/– 5%
BTU/Hr (approx.):	90 BTU/Hr.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T1M1LCK1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

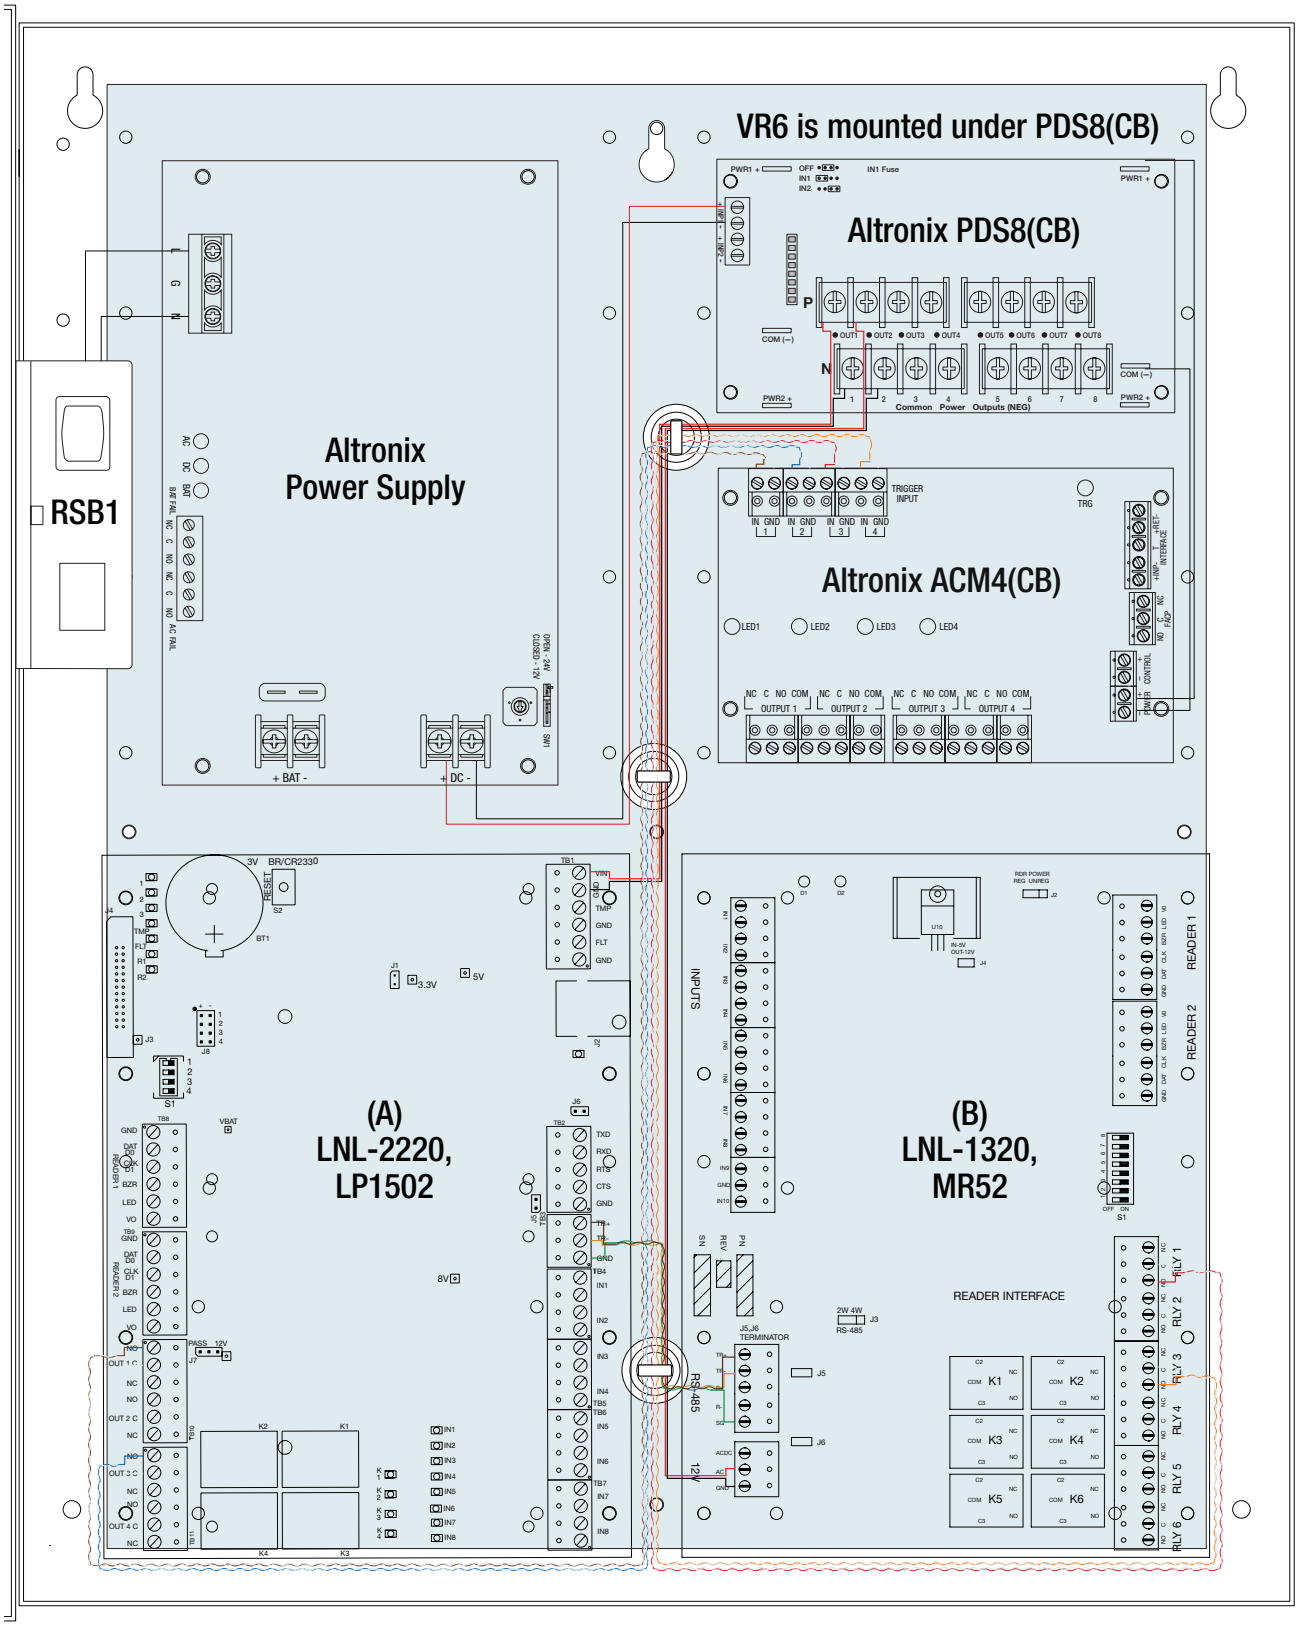

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T1M1LCK1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Dimensions and Drawing

Dimensions (H x W x D approximate)

18.0" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

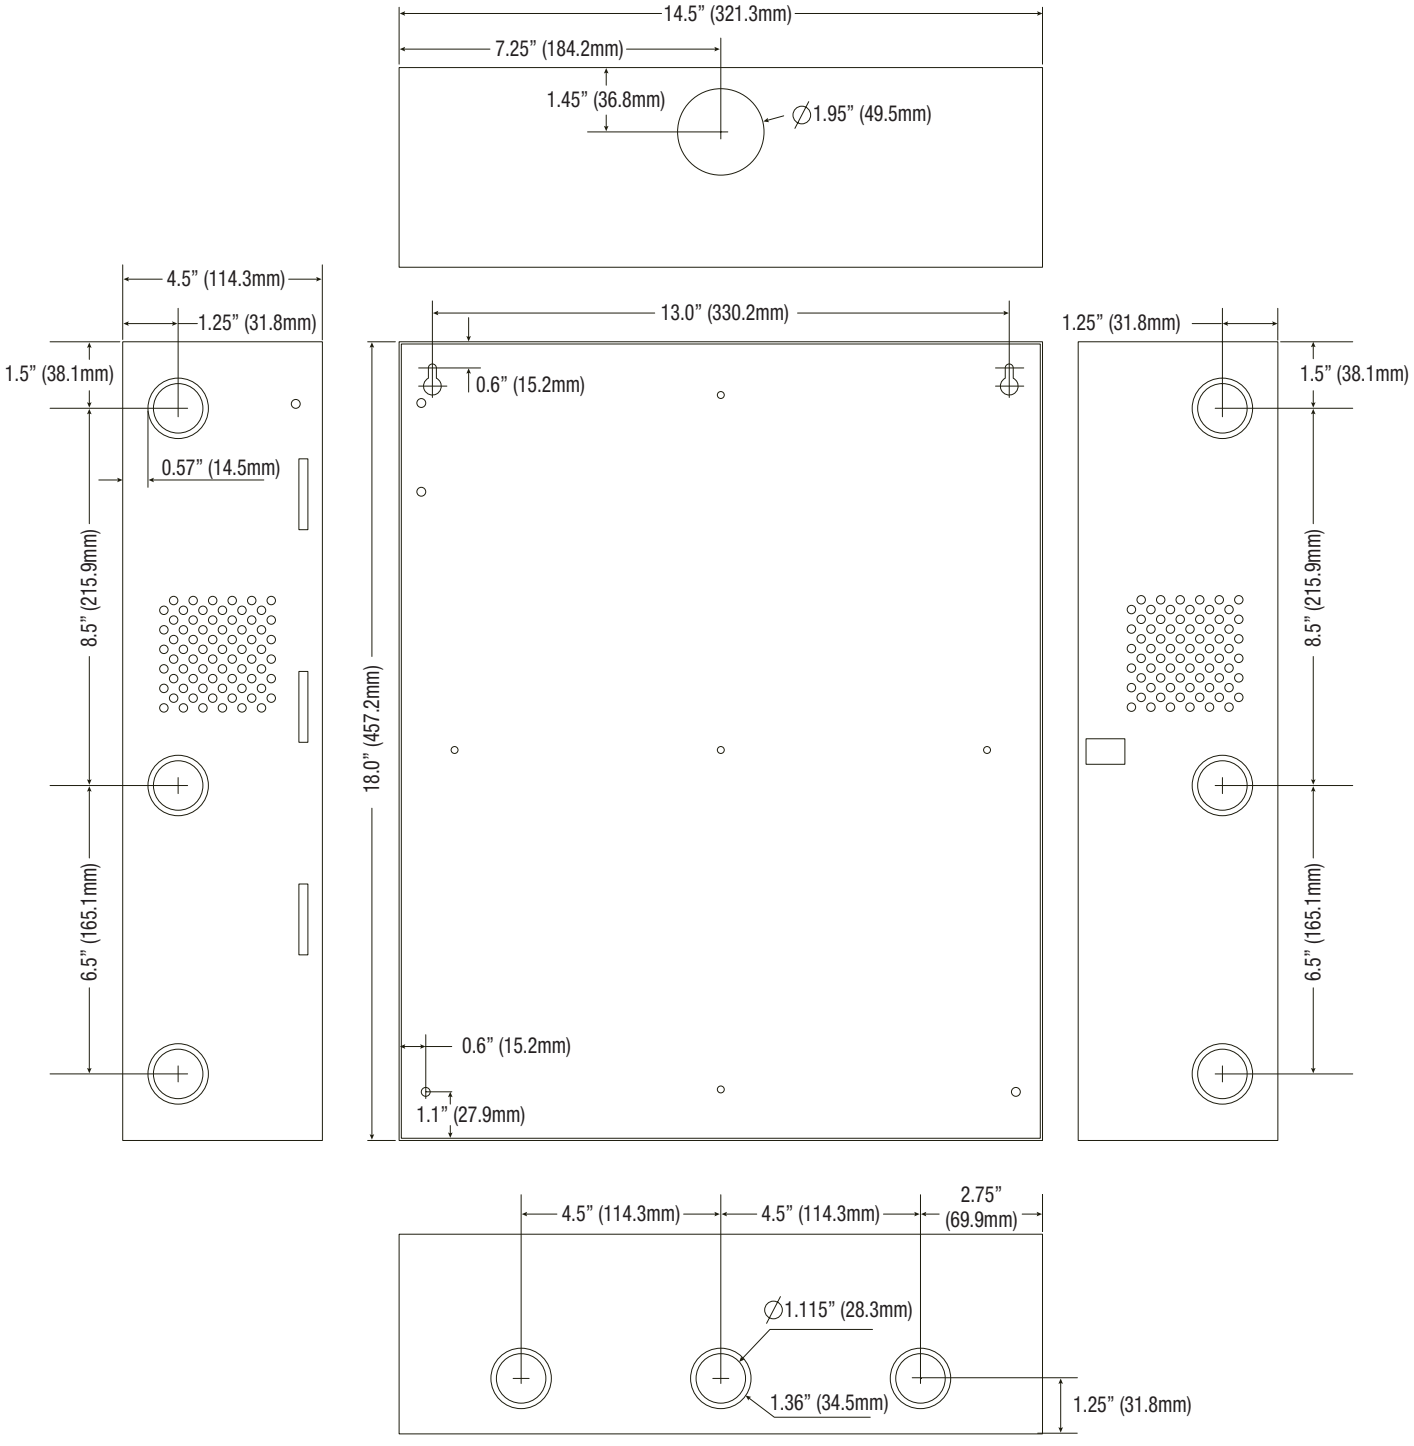

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com