

T1MKT4S (Kit)

Access and Power Integration Solution for Mercury



Altronix T1MKT4S is a 4-door access and power integration kit which includes Altronix PoE-driven power supply/charger, eight (8) fuse protected output dual voltage access control module and eight (8) fuse protected output dual voltage power distribution module. This kit also accommodates various combinations of Mercury* boards for up to four (4) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T1MKT4S

Mercury modules are not included

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt



Key Features

- 12VDC or 24VDC PoE-driven power supply/charger
- Accommodates the following Mercury controllers: LP1501, LP1502, LP2500, LP4502, MR16IN, MR16OUT, MR50, MR52, MR62e, MUX8
- Convenient knockout configuration:
 - One (1) double knockout
1.948" (1-1/2" Conduit) / 1.701" (1-1/4" Conduit)
 - Nine (9) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates batteries
- Supervision
 - PoE Loss
 - Low Battery and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Accessories (order separately)



NetWay8BT



NetWay1BT – 802.3bt (4PPoE) Midspan/Injector

- Single port midspan/injector delivers up to 90W max

NetWay4BT – 802.3bt Midspan/Injector

- 4-Port midspan/injector delivers up to 90W per port (480W max)

NetWay8BT – 802.3bt Midspan/Injector

- 8-Port midspan/injector delivers up to 90W per port (480W max)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/accessories in any metal enclosure or backplane.

Specifications

PoE Driven Power Supply/Charger (Tango1B):

Ethernet Input

802.3bt PoE up to 90W (or 802.3at up to 30W or 802.3af up to 15W)

Power Output (when using 802.3bt 90W)

12VDC up to 5.4A (65W) and/or 24VDC up to 2.7A (65W)

Combined output not to exceed 65W

When charging batteries:

12VDC up to 4.6A (55W) and/or 24VDC up to 2.3A (55W)

Combined output not to exceed 55W

Ethernet Output

Pass-through Ethernet Port (data only)

Battery Charging Circuit

12VDC battery charger for Lithium Iron Phosphate Battery (LiFePO₄ only)

Unique technology allows for single battery to backup 12VDC and/or 24VDC systems

Supervision

Loss of PoE Input

Battery Supervision

Indicators (LED)

Input	Indicates input voltage is present
Output	Indicates normal operating condition
PoE Type	PoE Class Indicator
Supervision	PoE Fail or BAT Fail

Dual Input Access Power Controller (ACMS8):

Input

Voltage 12 and 24VDC from Tango1B

Input Fuses 15A/32V

Outputs

Voltage 12VDC and/or 24VDC

Eight (8) independently controlled fused outputs

a) Fail-Safe and/or Fail-Secure power outputs

Form "C" Relays rated 28VAC or VDC @ 2.5A

b) Auxiliary power outputs (unswitched)

c) Any combination of the above

Output Fuses 3A/32V

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)

Green LED FACP disconnect is triggered

Dual Input Power Distribution Module (PDS8):

Input

Voltage 12 and 24VDC from Tango1B

Input Fuses 10A/32V

Outputs

Voltage 12VDC and/or 24VDC

Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output Fuses 3A/32V

Indicators (LED)

DC Output Eight (8) individual output LEDs

Green: 12VDC

Red: 24VDC

T1MKT4S Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies.

Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:

18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)

Shipping:

21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

Weight (approx.)

Product 18.0 lb. (8.17 kg)

Shipping 22.0 lb. (9.98 kg)

Temperature

Operating 0°C to 49°C (32°F to 120°F)


Storage - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 90 BTU/Hr.

Access Controller Position Chart for the Following Models:

Altronix/Mercury	Pem Mounting
LP2500, MUX8	(A)
LP1502, LP4502, MR52, MR16IN, MR16OUT	(B)
LP1501, MR62e	(C)
MR50	(D)

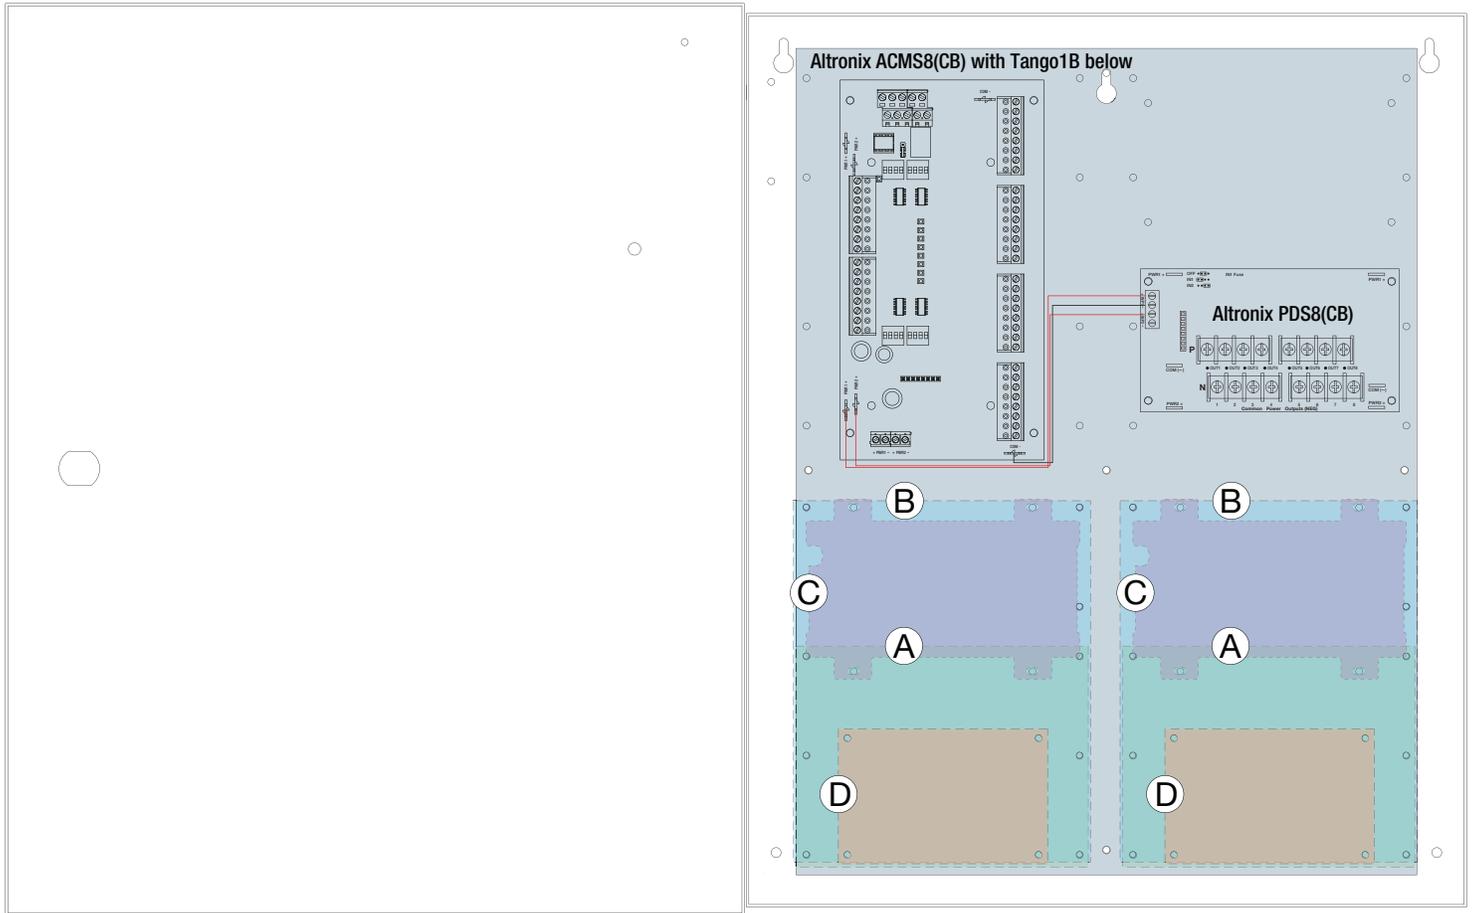

Dimensions and Drawing

Dimensions (H x W x D approximate)
 18.0" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

