

T1RSH1F4D

Rack Access and Power Integration Solution for Software House



Altronix T1RSH1F4D kit consists of Trove1R enclosure and TSH1R Altronix & Software House backplane with 12VDC or 24VDC (factory set at 24VDC) @ 4A power supply/charger and four (4) output PTC access control module. This kit also accommodates various combinations of Software House boards for up to four (4) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T1RSH1F4D

SOFTWARE HOUSE

Software House boards are not included

Key Features

- Output Power:
 - Four (4) 24VDC PTC lock power outputs rated at 4A total max.
 - Fire Alarm Disconnect is individually selectable by output
- Accommodates the following Software House controllers: iSTAR Ultra ACM, iSTAR ACM SE/ACM PRO, I8, R8 or I8-CSI
- Power status LED on front panel
- Simplified board layout and wire management
- Convenient knockout configuration:
 - Four (4) double knockouts - 3/4" Conduit and 1" Conduit
 - Two (2) double knockouts - 1/2" Conduit and 3/4" Conduit
- 6' IEC320 3-wire power cord
- 2U drawer on extendable rails
- Black powder coated steel enclosure
- Included Z Bracket facilitates ease of wiring
- Includes cam lock, tamper switch and mounting hardware
- CE European Conformity
- Lifetime Warranty*

*Altronix Power Supply/Charger and Sub-Assemblies only

Accessories (order separately)



RE2

RE2 - Rack Mount Battery Enclosure

accommodates up to four (4) 12VDC/7AH batteries



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.

Specifications

Power Supply/Charger (eFlow4RLB):

Input

Voltage	120VAC, 60Hz. 3.5A
Input Fuse	5A/250V

Output

Voltage	24VDC
Current	4A continuous
Auxiliary	1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)
Prevents deep battery discharge

Indicators (LED)

Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

Access Power Controller (ACM4CB):

Input

Voltage	24VDC from eFlow4RLB
Input PTC	9A

Outputs

Voltage	24VDC
Four (4) independently controlled PTC outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output PTCs	2.5A
-------------	------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T1RSH1F4D Kit:

Agency Listings

CE	European Conformity
----	---------------------

Physical and Environmental:

Dimensions (H x W x D):

Modular 2U standard EIA 19" rack mount chassis
Enclosure: 3.25" x 19.0" x 26.5" (82.6mm x 482.6mm x 673.1mm)
Shipping: 31" x 23" x 8.25" (787.4mm x 584.2mm x 209.6mm)

Weights (approx.):

Product:	20 lb. (9.07 kg)
Shipping:	25 lb. (11.34 kg)

Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)


Relative Humidity

85% +/- 5%

BTU/Hr.: 53 BTU/Hr.

Access Controller Position Chart for the Following Models:

Software House	Pem Mounting
iStar Ultra ACM SE, iStar Pro ACM	(A)
iStar Ultra ACM	(B)
i8, R8	(C)

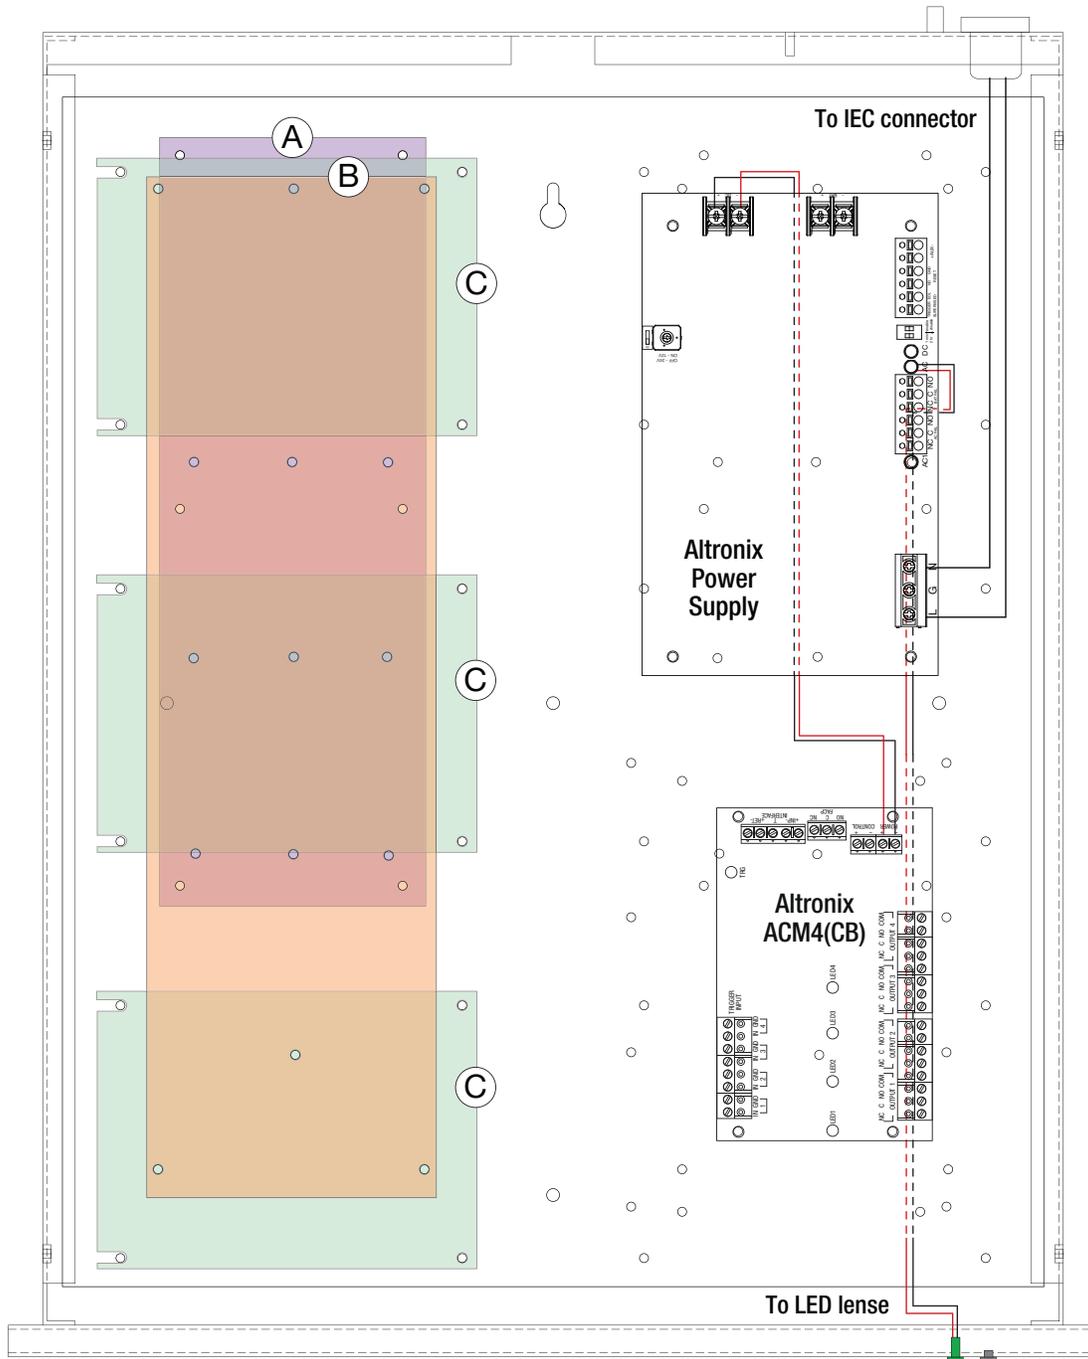

Dimensions and Drawing

Dimensions (H x W x D approximate)

13.25" x 19.0" x 26.5" (82.6mm x 482.6mm x 673.1mm)

