

HubWayLD16Di

Active UTP Transceiver Hub with Integral Camera Power



HubWayLD16Di

Altronix HubWayLD16Di Active UTP Transceiver Hub with Integral Isolated Camera Power transmits UTP video, RS422/RS485 data and power over a single CAT-5 or higher structured cable. Unit provides 16 camera channels in a space saving 1U EIA 19" rack mount chassis which may be rack, wall or shelf mounted. Video transmission range is up to 3000 ft. max. per channel. Units are compatible with AC and/or DC fixed or PTZ cameras when utilizing Altronix HubWayAv, HubWayAv2, HubWayDv or HubWayDvi Video Balun/Combiners. In addition, the unit features individually selectable 24VAC or 28VAC PTC protected outputs with surge suppression. An optional HubSat4D Passive UTP Transceiver Hub with Integral Camera Power can be used as an accessory module to transmit video from up to 4 cameras over a single CAT-5 or higher structured cable back to the HubWayLD16Di. In addition, the HubSat4D provides power to these cameras locally to eliminate the possibility of voltage drop associated with long cable runs.

Specifications

Input

Voltage	115VAC, 60Hz, 3A or 230VAC, 50/60Hz, 1.5A
Fusing	Primary fuse (internal) is rated at 5A/250V

Outputs

PTC protected outputs rated 1A per channel	
Voltage	Individually selectable 24VAC or 28VAC power outputs with OFF position
Current	Up to 1A max. per channel, not to exceed a total of 10A maximum current
Other	Surge suppression

Video

Sixteen (16) channels of video over twisted pair up to a distance of 914.4m (3,000 ft.) per channel	
Sixteen (16) 75 Ohm video outputs	
Picture and gain control	

Data	RS422/RS485 data inputs
------	-------------------------

Indicators (LED)

Outputs	Sixteen (16) individual power LED indicators
---------	--

Agency Listings

UL	UL 2044 (Commercial CCTV Equipment)
cUL	CSA Standard C22.2 No.1-04, Audio, Video and Similar Equipment
CE	European Conformity

Physical and Environmental

Enclosure Dimensions (H x W xD)	
Modular 1U standard EIA 19" rack mount chassis. 1.625" x 19.125" x 8.5" (41.3mm x 486mm x 216mm)	
Product Weight	20.85 lb. (9.46 kg)
Shipping Weight	22.15 lb. (10.05 kg)
Temperature	
Operating	0°C to 49°C (32°F to 120°F)
Storage	-20°C to 70°C (-4°F to 158°F)
Relative Humidity	85% +/-5%.
BTU/Hr (approx.):	24VAC: 123 BTU/Hr. 28VAC: 143 BTU/Hr.

Lifetime Warranty



HubWayLD16Di

Active UTP Transceiver Hub with Integral Camera Power



Accessories (order separately)



HubWayEXP

HubWayEXP UTP Power Injector

Supplies power combined with pass-through video and data for up to 16 cameras from Altronix HubWay Active UTP Transceiver Hubs. UL Listed. CE European Conformity




HubSat4D/4Di

HubSat4/4Di Passive UTP Transceiver Hub with Integral Camera Power

Transmits UTP video, RS422/RS485 data, and power over a single CAT-5 or higher structured cable. UL Listed. CE European Conformity

Video Balun/Combiners

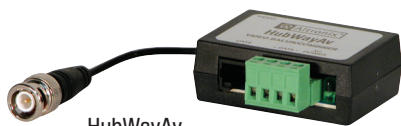

HubWayAv

HubWayAv and HubWayAv2

Video Balun/Combiners for use with 24VAC cameras

Compatible with all HubWay and HubSat UTP Transceiver Hubs.

Allow for video and data transmission and power over CAT-5 or higher structured cable to AC fixed cameras or PTZs.



HubWayAv2



HubWayDv

HubWayDv

Video Balun/Combiner for use with 12VDC cameras

Compatible with all HubWay and HubSat UTP Transceiver Hubs.

Allows for video and data transmission and power over CAT-5 or higher structured cable to 12VDC fixed cameras or PTZs.



HubWayDvi

HubWayDvi

Video Balun/Combiner for use with 12VDC cameras without isolation

Compatible with all HubWay and HubSat UTP Transceiver Hubs.

Allows for video and data transmission and isolated power over CAT-5 or higher structured cable to 12VDC fixed cameras or PTZs.

Lifetime Warranty