

T2BV7512SD (Kit)

Access and Power Integration Solution for Brivo



T2BV7512SD kit consists of Trove2 enclosure and TBV2 Brivo/Altronix backplane with one (1) 24VDC @ 10A and one (1) 12VDC @ 10A power supply/chargers, twelve (12) PTC protected dual input/output access control module and sixteen (16) PTC protected dual input/output power distribution module. This kit also accommodates various combinations of Brivo boards for up to twelve (12) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T2BV7512SD

Brivo boards are not included

Key Features

- 24VDC and 12VDC power supply/chargers
- Accommodates following Brivo boards:
 - One (1) ACS6000-MBE
 - Five (5) ACS6100-DB or ACS6100-I/O
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- CE European Conformity
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*



T2BV7512SD (Kit)

Access and Power Integration Solution for Brivo



Specifications

Power Supply/Charger 1 (AL1024ULXB2):

Input	
Voltage	115VAC 60Hz, 4.2A
Fusing	5A/250V
Output	
Voltage	24VDC
Current	10A @ 24VDC continuous max.
Other	Overvoltage protection. Filtered and regulated

Power Supply/Charger 2 (AL1012ULXB):

Input	
Voltage	115VAC, 60Hz, 2.6A
Input Fuse	5A/250V
Output	
Voltage	12VDC
Current	10A @ 12VDC continuous max.
Other	Overvoltage protection. Filtered and regulated

Both Power Supplies:

Battery Charging

Capacity	12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Dual Input Power Distribution Module (PDS16CB):

Input	
Voltage	24VDC from AL1024ULXB2 and 12VDC from AL1012ULXB
Input PTCs	9A

Outputs

Voltage	12VDC and/or 24VDC
Any of the sixteen (16) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output PTCs	2.5A

Indicators (LED)

DC Output	Sixteen (16) individual output LEDs
Green:	12VDC
Red:	24VDC

Dual Input Access Power Controller (ACMS12CB):

Input	
Voltage	24VDC from AL1024ULXB2 and 12VDC from AL1012ULXB
Input PTCs	9A
Outputs	
Voltage	12 or 24VDC individually selectable
Twelve (12) selectable 12VDC - 24VDC independently controlled outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated	
c) Auxiliary power outputs (unswitched)	
d) Any combination of the above	
Any of the twelve (12) PTC protected power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output PTCs	2.5A

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Blue LED	FACP disconnect is triggered
Individual voltage LEDs:	
Green:	12VDC
Red:	24VDC

T2BV7512SD Kit:

Agency Listings

Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE	European Conformity
----	---------------------

Physical and Environmental

Dimensions (H x W x D)	
Enclosure:	27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:	32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

Product	40.1 lb. (18.2 kg)
Shipping	43.85 lb. (19.9 kg)

Temperature


Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity	85% +/- 5%
-------------------	------------

BTU/Hr (approx.):	246 BTU/Hr.
-------------------	-------------

Access Controller Position Chart for the Following Models:

Altronix / Brivo	Pem Mounting
ACS6000-MBE	(A)
ACS6100-DB, ACS6100-I/O	(B)

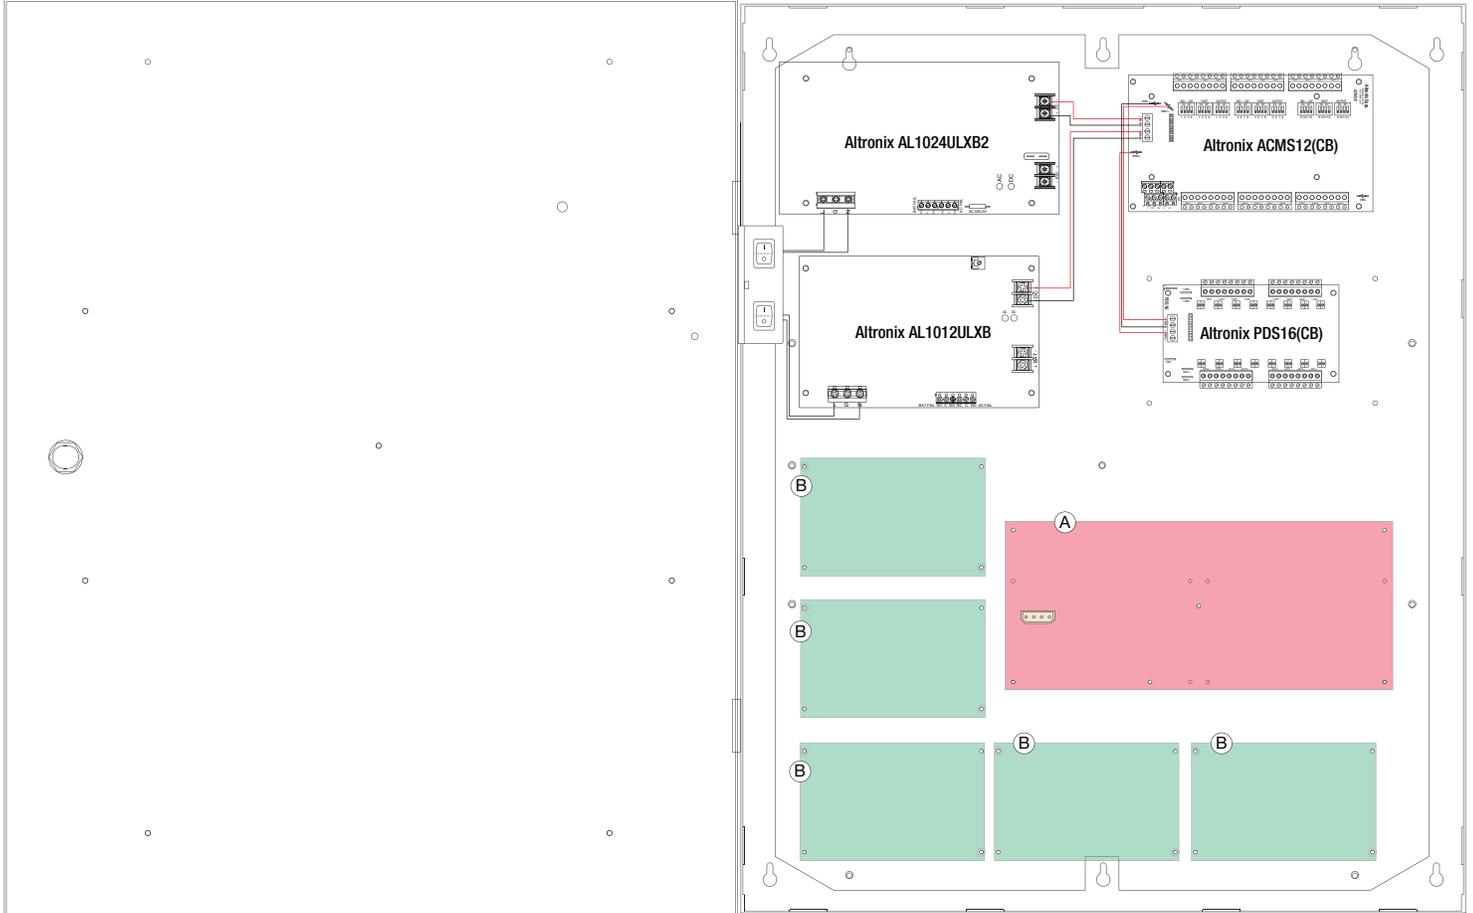

Accessories (order separately)



WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

