

T2CVK3310 (Kit)

Access & Power Integration Solution for CDVI

TROVE™

Altronix T2CVK3310 kit consists of Trove2 enclosure, TCV2 CDVI/Altronix backplane with two (2) 12 or 24VDC @ 6A power supply/chargers, and two (2) PTC protected five (5) output Power Distribution Modules with Fire Alarm Interface. This kit also accommodate various combinations of CDVI Atrium A22K/A22NB/ADH10 boards for up to ten (10) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T2CVK3310

CDVI modules are not included

Key Features

- 24VDC power supply/chargers
- Accommodates up to five (5) CDVI Atrium A22K/A22NB/ADH10 modules
- Convenient knockout configuration:
 - Single 2" diameter knockout located top center of enclosure
 - Sixteen (16) double knockouts (1" and 0.75")
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications**Two (2) Power Supply/Chargers (AL600ULXB):****Input**

Voltage 115VAC, 60Hz, 3.5A max
Input Fuse 5A/250V

Output

Voltage 12VDC or 24VDC selectable
Current 6A @ 12VDC or 24VDC continuous max.
Other Overvoltage protection
Filtered and regulated

Battery Charging

Capacity 12AH/12VDC (2 within enclosure)
40AH/65AH (requires separate enclosure)
Type Sealed lead acid or gel type
Failover Upon AC loss, instantaneous
Batteries are sold separately

Supervision

AC Failure Form "C" contacts
Battery Form "C" contacts

Indicators (LED)

Input 115VAC is present
DC Output Powered
Battery Discharged or not connected

Two (2) Power Distribution Modules with Fire Alarm Interface (MOM5):**Input**

Voltage 12VDC or 24VDC from power supply

Outputs

Five (5) individual PTC protected auto-resettable power-limited outputs
Voltage 12VDC or 24VDC
Current 2.5A continuous supply current
Current limit is 2A per output
Other Short circuit and thermal overload protection
Filtered and regulated
Output PTCs 2.5A

Fire Alarm Interface

Fire Alarm Panel or Access Control System trigger inputs N.O. or N.C.
supervised trigger input and polarity reversal trigger input

Supervision

Power Failure Form "C" contact rated 1A 28VDC/115VAC
Trigger Form "C" contact rated 1A 28VDC/115VAC

Indicators (LED)

Input Power is present
Input Trigger On
Outputs Output fail

T2CVK3310 Kit:**Agency Listings**

All components of this Trove kit are UL Listed sub-assemblies
Please refer to the corresponding Sub-Assembly Installation Guides
for further information

CE European Conformity

Physical and Environmental:**Dimensions (H x W x D)**

Enclosure:
27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:
32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

Product: 54.7 lb. (24.8 kg)
Shipping: 59.7 lb. (27.1 kg)

Temperature

Operating 0°C to 49°C (32°F to 120°F)
Storage -20°C to 70°C (-4°F to 158°F)

Relative Humidity


85% +/- 5%

BTU/Hr. (approx.):

12VDC: 74 BTU/Hr.
24VDC: 148 BTU/Hr.
12VDC and 24VDC: 111 BTU/Hr.

Access Controller Position Chart for the Following Models:

CDVI	Pem Mounting
A22K1NB, A22NB, ADH10	(A)

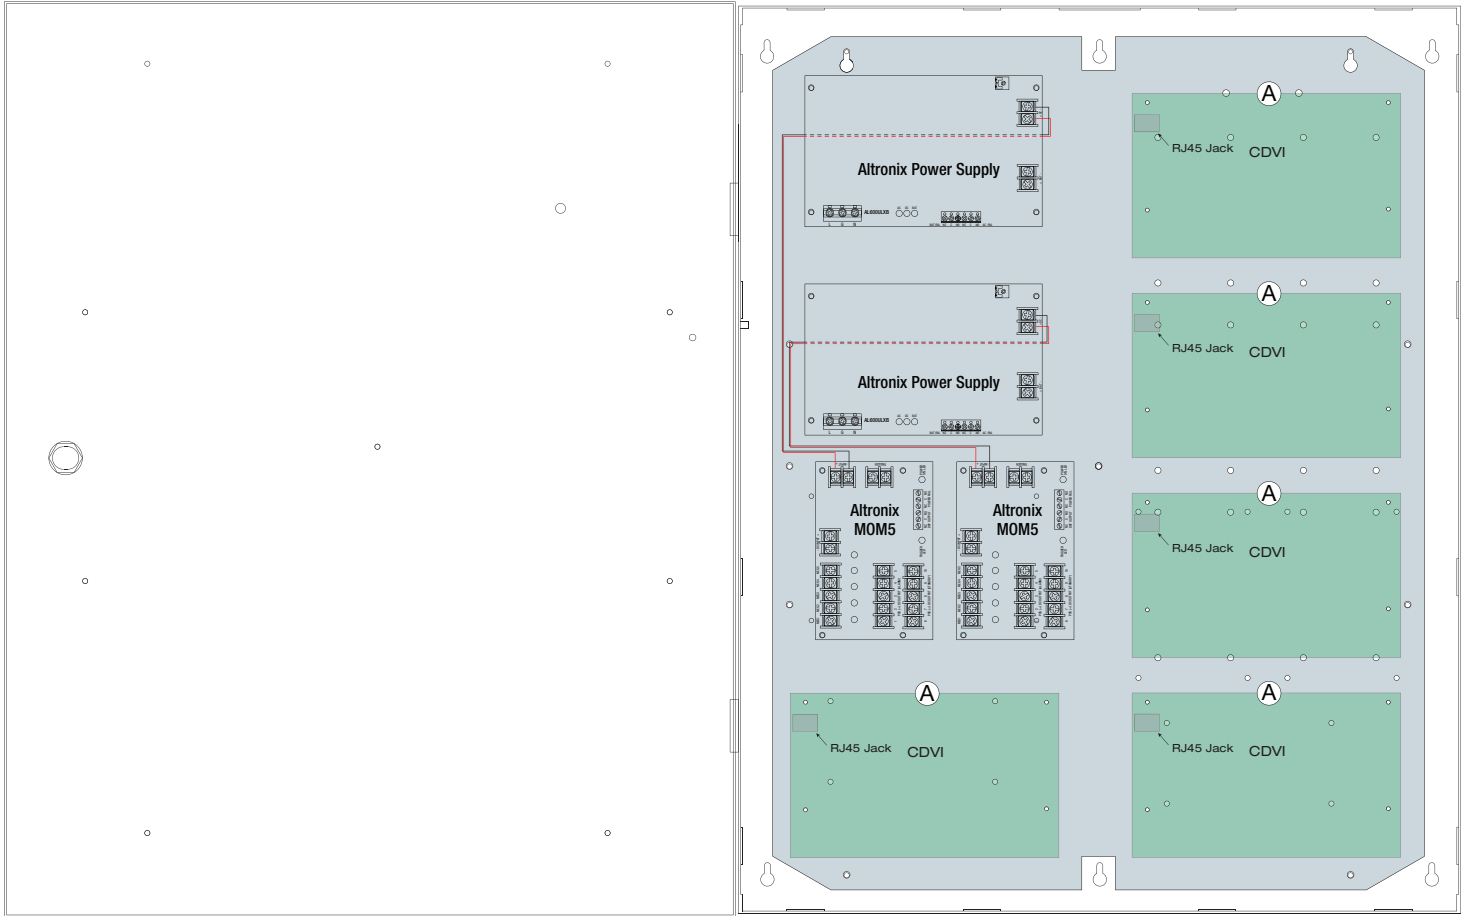

Accessories (order separately)

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteriesTrove2BWC
with
wires**TROVE2BWC - Battery/Wire Trough Enclosure**

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

