

LPS3WP12220

Outdoor Linear Power Supply/Charger

Altronix LPS3WP12220 outdoor linear power supply/charger is specifically designed to provide the power needed by the most demanding security and access control applications. It converts a 220VAC 50/60Hz input to a 12VDC, 2.5A continuous output. Unit's unique NEMA 4 UL Listed enclosure allows installation next to the outdoor equipment it is designed to power.



LPS3WP12220

Specifications

Input

Voltage 220VAC (working range 198VAC - 256VAC), 50/60Hz, 0.25A

Outputs

Voltage 12VDC
 Current 2.5A continuous supply current
 Other Short circuit and thermal overload protection
 Filtered and regulated

Battery Charging

Type Sealed lead acid or gel type
 Failover Upon AC loss, instantaneous
 Batteries are sold separately

Indicators (LED)

Input Input voltage is present
 DC Output Powered

Physical and Environmental

NEMA 4 Rated enclosure for outdoor use

Dimensions (H x W x D)

Enclosure: 12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)
 Shipping: 18" x 14" x 10" (457.2mm x 355.6mm x 254mm)

Weight (approx.)

Product: 12.55 lb. (5.69 kg)
 Shipping: 14 lb. (6.53 kg)


Temperature

Operating: 0°C to 49°C (32°F to 120°F)
 Storage: - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 15 BTU/Hr.

Accessories (order separately)

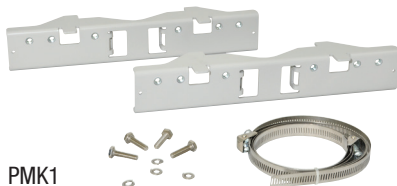

PMK1 Pole Mount Kit

PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2"- 8"(diameter) poles.


Lifetime Warranty

LPS3WP12220

Outdoor Linear Power Supply/Charger

Dimensions and Drawing

Dimensions (H x W x D approximate)
12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)

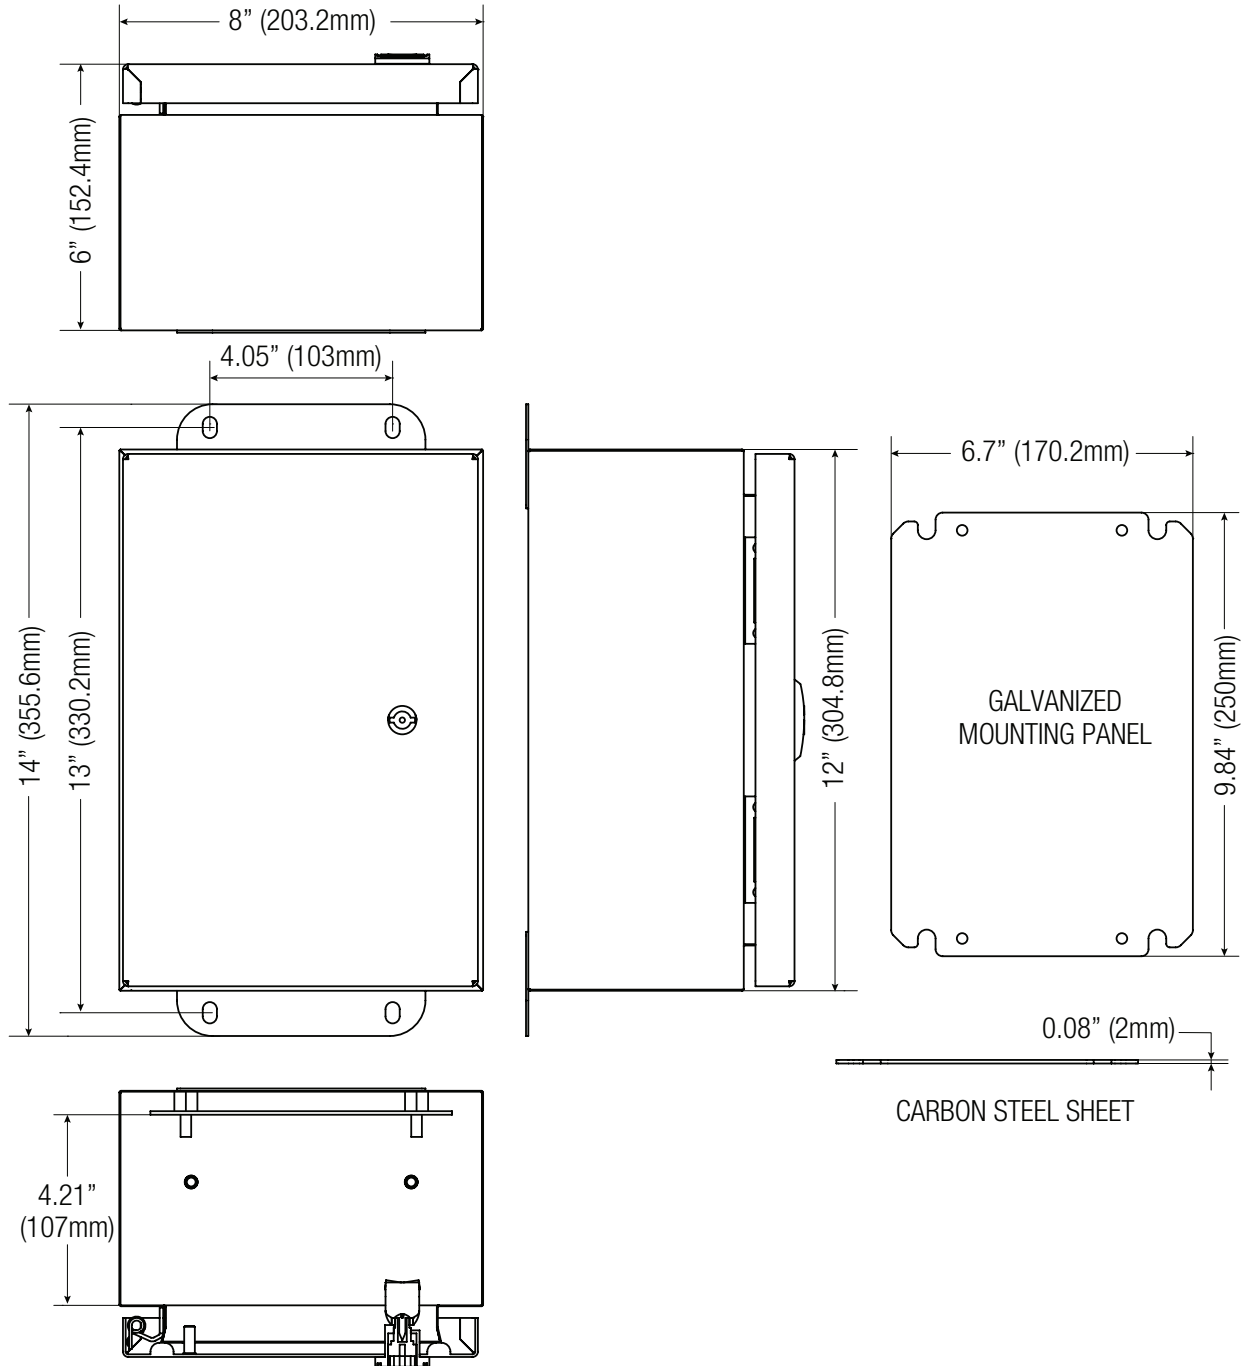

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com