

LPS3WP24

Outdoor Linear Power Supply/Charger

Altronix LPS3WP24 outdoor linear power supply/charger is specifically designed to provide the power needed by the most demanding security and access control applications. It converts a 115VAC 50/60Hz input to a 24VDC, 2.5A continuous output. Unit's unique NEMA 4 UL Listed enclosure allows installation next to the outdoor equipment it is designed to power.



LPS3WP24

Specifications

Input

Voltage 115VAC, 50/60Hz, 0.95A

Outputs

Voltage 24VDC
Current 2.5A continuous supply current
Other Short circuit and thermal overload protection
Filtered and regulated

Battery Charging

Type Sealed lead acid or gel type
Failover Upon AC loss, instantaneous
Batteries are sold separately

Indicators (LED)

Input Input voltage is present
DC Output Powered

Physical and Environmental

NEMA 4 Rated enclosure for outdoor use

Dimensions (H x W x D)

Enclosure:
12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)
Shipping:
18" x 14" x 10" (457.2mm x 355.6mm x 254mm)

Weight (approx.)

Product: 12.55 lb. (5.69 kg)
Shipping: 14 lb. (6.53 kg)


Temperature

Operating: 0°C to 49°C (32°F to 120°F)
Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 31 BTU/Hr.

Accessories (order separately)

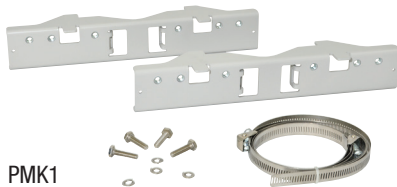

PMK1

PMK1 Pole Mount Kit

PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8" (diameter) poles.

Lifetime Warranty


LPS3WP24

Outdoor Linear Power Supply/Charger

Dimensions and Drawing

Dimensions (H x W x D approximate)

12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)

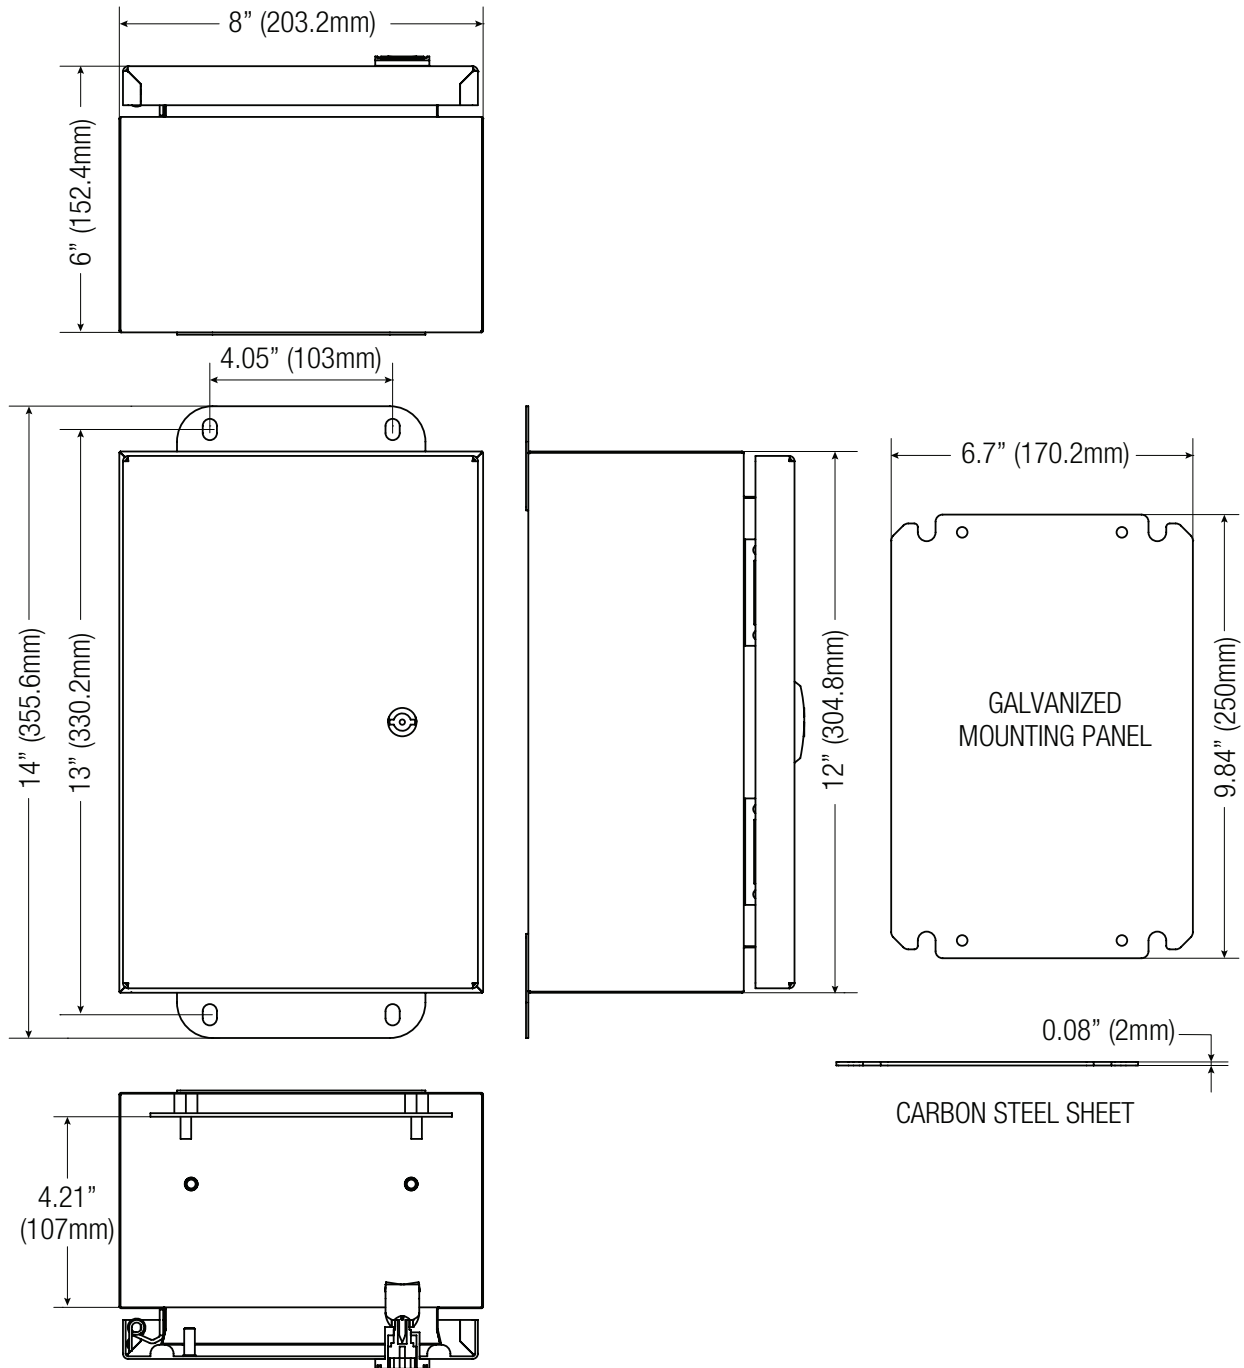

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com