

T2HW7LXK3 (Pre-wired Kit)

Access and Power Integration Solution for Honeywell



Altronix T2HW7LXK3 is a 8-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Honeywell ProWatch/WinPak hardware. This unit provides ample power and dual voltage outputs to support Honeywell platform controllers and locking devices. The T2HW7LXK3 accommodates four (4) Dual Reader Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.



T2HW7LXK3 - includes
AL1024ULXB2, ACMS8, VR6, PDS8,
wire harnesses and finger duct

Honeywell modules are not included

Key Features

- Accommodates the following Honeywell controllers:
 - 4 - PW7K1R2/PRO42R2
- Convenient knockout configuration:
 - One (1) single knockout - 2" Conduit
 - Sixteen (16) double knockouts - 1/2" Conduit and 3/4" Conduit
- Unit includes:
 - Removable backplane
 - Wire management
 - Custom wire assemblies for power distribution with terminal blocks for controller connections
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Enclosure accommodates up to four (4) 12VDC/7AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply (AL1024ULXB2):

Input

Voltage 115VAC 60Hz, 4.2A max
 Input Fuse 5A/250V

Outputs

Voltage 24VDC
 Current 10A @ 24VDC continuous max
 Other Overvoltage protection. Filtered and regulated

Battery Charging

Capacity 12AH/7VDC (4 within enclosure)
 40AH/65AH (requires separate enclosure)
 Type Sealed lead acid or gel type
 Failover Upon AC loss, instantaneous
 Batteries are sold separately

Supervision

AC Failure Form "C" contacts
 Battery Form "C" contacts

Indicators (LED)

Input 115VAC is present
 DC Output Powered
 Battery Discharged or not connected

Dual Input Access Power Controller (ACMS8):

Input

Voltage 24VDC from AL1024ULXB2 and
 12VDC from VR6
 Input Fuses 15A/32V

Outputs

Voltage 12 or 24VDC individually selectable
 Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) independently controlled Form "C" relay outputs:
 a) Fail-Safe and/or Fail-Secure power outputs
 b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated
 c) Auxiliary power outputs (unswitched)
 d) Any combination of the above

Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output Fuses 3A/32V

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)
 Blue LED FACP disconnect is triggered

Individual voltage LEDs:

Green: 12VDC
 Red: 24VDC

Voltage Regulator (VR6):

Input

Voltage 24VDC from AL1024ULXB2

Output

Voltage 12VDC
 Current 6A continuous
 Other Surge suppression

Indicators (LED)

Input 24VDC is present
 Output Powered

Dual Input Power Distribution Module (PDS8):

Input

Voltage 24VDC from AL1024ULXB2 and
 12VDC from VR6

Input Fuses 10A/32V

Outputs

Voltage 12VDC and/or 24VDC
 Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2
 Individual outputs may be set to OFF position for servicing

Output Fuses 3A/32V

Indicators (LED)

DC Output Eight (8) individual output LEDs
 Green: 12VDC
 Red: 24VDC

T2HW7LXK3 Kit:

Agency Listings

CE European Conformity
 All components of this Trove kit are UL Listed sub-assemblies
 Please refer to the corresponding Sub-Assembly Installation Guides for further information

Physical and Environmental:

Dimensions (H x W x D)

Enclosure:
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
 Shipping:
 32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)


Weight (approx.)

Product: 41.6 lb. (18.87 kg)
 Shipping: 45.6 lb. (20.68 kg)

Temperature

Operating 0°C to 49°C (32°F to 120°F)
 Storage - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%
 BTU/Hr. (approx.): 145 BTU/Hr

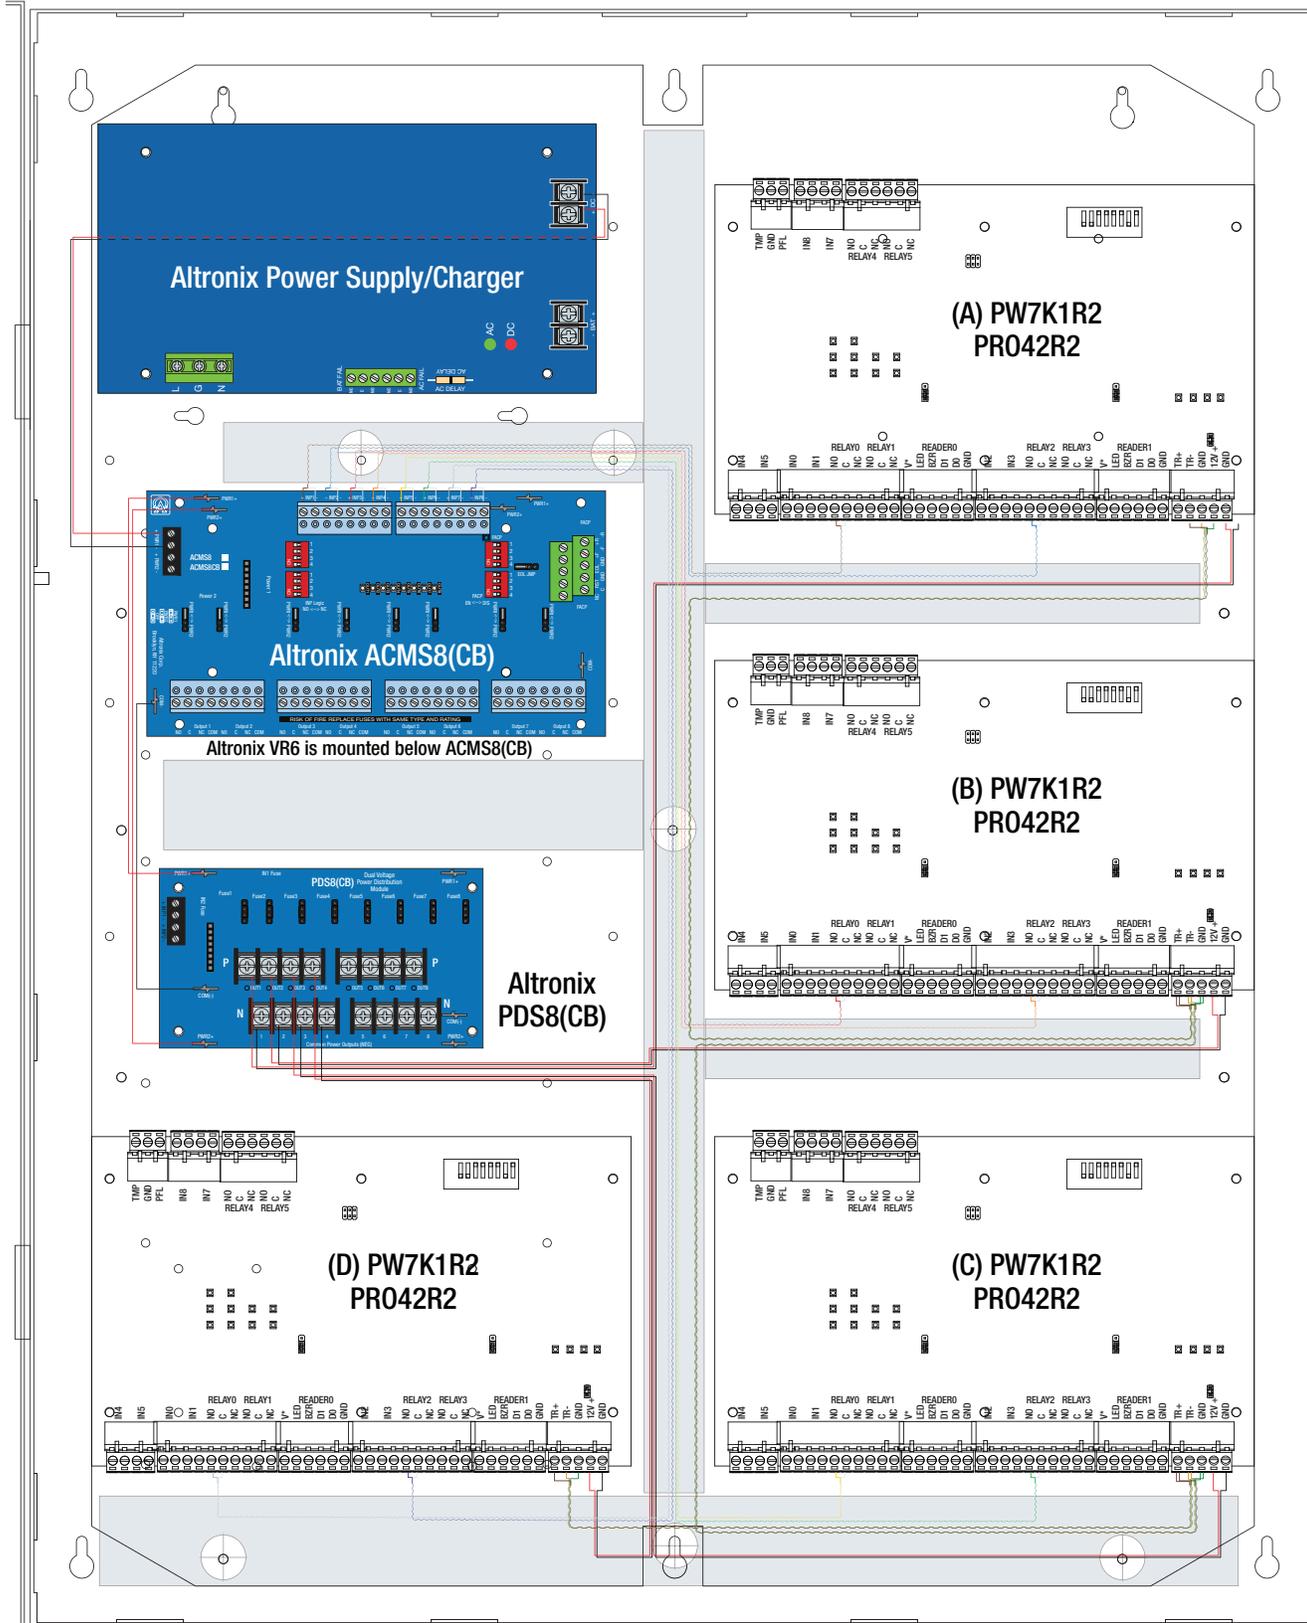

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

