

Maximal RD Series

Rack Access Power Controllers (PTC)



Altronix Maximal RD Rack Mount Series Access Power Controllers units distribute and switch power to access control systems and accessories. They convert a 115VAC 50/60Hz input into eight (8) or sixteen (16) independently controlled 12VDC and/or 24VDC PTC protected outputs. Outputs are activated by a normally open (NO) or normally closed (NC) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. Units will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the outputs.



Maximal3RHD

Key Features

- Eight (8) or Sixteen (16) independently controlled PTC protected 12VDC and/or 24VDC outputs
- Individually selectable Mag Lock/Strike (Fail-Safe, Fail-Secure) solid state PTC protected outputs
- Thermal and short circuit protection with auto reset
- Supervision:
 - AC Fail
 - Low Battery
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the outputs
- Fire Alarm disconnect input options:
 - a) Normally open (NO) or normally closed (NC) dry contact input
 - b) Polarity reversal input from FACP signaling circuit
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- Lifetime Warranty

Maximal RD Power Supply Series Configuration Reference Chart

Altronix Model Number	115VAC 50/60Hz Input Current	Power Supply Board Input Fuse Rating	Power Supply 1 (8 outputs)	Power Supply 2 (8 outputs)	Total Output Current	PTC Protected Auto-Resettable Outputs	Maximum Current Per ACM8CBR-M Output
Maximal1RHD	1.9A	5A/250V	12VDC @ 4A	N/A	4A	8	2.5A
			24VDC @ 3A	N/A	3A		
Maximal1RD	1.9A	5A/250V	12VDC @ 4A	N/A	4A	16	2.5A
			24VDC @ 3A	N/A	3A		
Maximal3RHD	1.9A	3.5A/250V	12VDC @ 6A	N/A	6A	8	2.5A
			24VDC @ 6A	N/A			
Maximal3RD	1.9A	3.5A/250V	12VDC @ 6A	N/A	6A	16	2.5A
			24VDC @ 6A				
Maximal33RD	3.8A	3.5A/250V	12VDC @ 6A	12VDC @ 6A	12A	16	2.5A
			24VDC @ 6A	24VDC @ 6A			
			12VDC @ 6A	24VDC @ 6A			

Lifetime Warranty

Maximal RD Series

Rack Access Power Controllers (PTC)



Specifications

Input

Voltage 115VAC, 50/60Hz
 Input Fuse Varies, See Reference Chart

Outputs

Voltage 12VDC and/or 24VDC, see Reference Chart
 Current Varies, see Reference Chart
 Output PTCs 2.5A
 Other Overvoltage protection
 Filtered and regulated outputs

Battery Charging

Type Sealed lead acid or gel type
 Failover Upon AC loss, instantaneous
 Batteries are sold separately. Separate enclosure is required

Fire Alarm Disconnect

Supervised Latching or non-latching, individually selectable for any or all of the outputs

Supervision

AC Failure Form "C" contacts
 Battery Form "C" contacts

Indicators (LED)

Input Illuminated ON/Reset Switch
 Output Individual Output Status LEDs located on the front panel

Physical and Environmental

2U rack mount chassis for use in standard EIA 19" rack.

Dimensions (H x W x D):

Enclosure: 3.26" x 19.125" x 8.5" (83mm x 486mm x 216mm)
 Shipping: 20.25" x 12.5" x 7.25" (514.4mm x 317.5mm x 184.2mm)

Weight (approx.):

Model	Product Weight	Shipping Weight
Maximal1RHD	10.7 lb. (4.85 kg)	12.7 lb. (5.76kg)
Maximal1RD	10.7 lb. (4.85 kg)	12.7 lb. (5.76kg)
Maximal3RHD	10.85 lb. (4.92 kg)	12.85 lb. (5.83 kg)
Maximal3RD	10.85 lb. (4.92 kg)	12.85 lb. (5.83 kg)
Maximal33RD	12.4 lb. (5.62 kg)	14.3 lb. (6.49 kg)

Temperature

Operating: 0°C to 49°C (32°F to 120°F)
 Storage: - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5% BTU/Hr. (approx.)

Model	12VDC	24VDC	12 and 24VDC
Maximal1RHD	25	37	N/A
Maximal1RD	25	37	N/A
Maximal3RHD	37	74	N/A
Maximal3RD	37	74	N/A
Maximal33RD	74	141	106

Accessories (order separately)



RE2 – Rack Mount Battery Enclosure




- Accommodates up to four (4) 12VDC/7AH batteries

Lifetime Warranty

Dimensions and Drawing

Dimensions (H x W x D approximate)

3.26" x 19.125" x 8.5" (83mm x 486mm x 216mm)

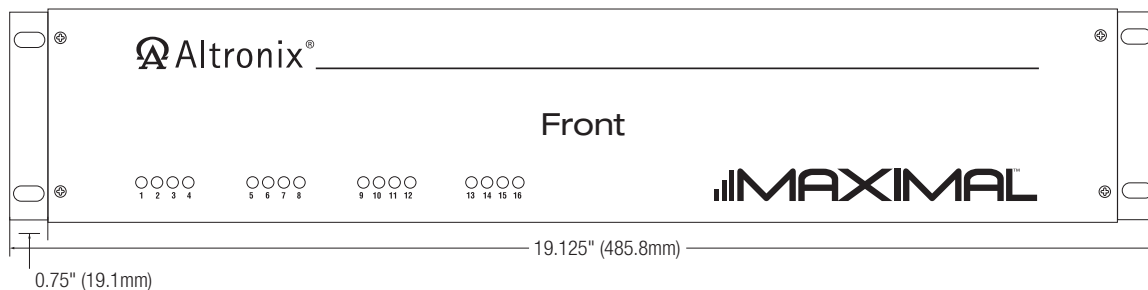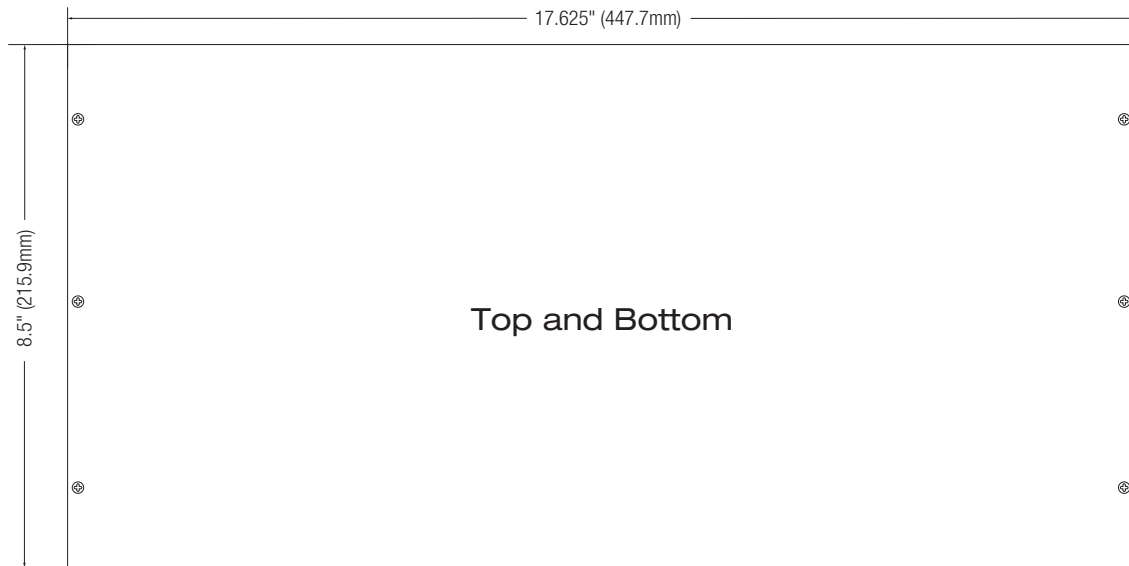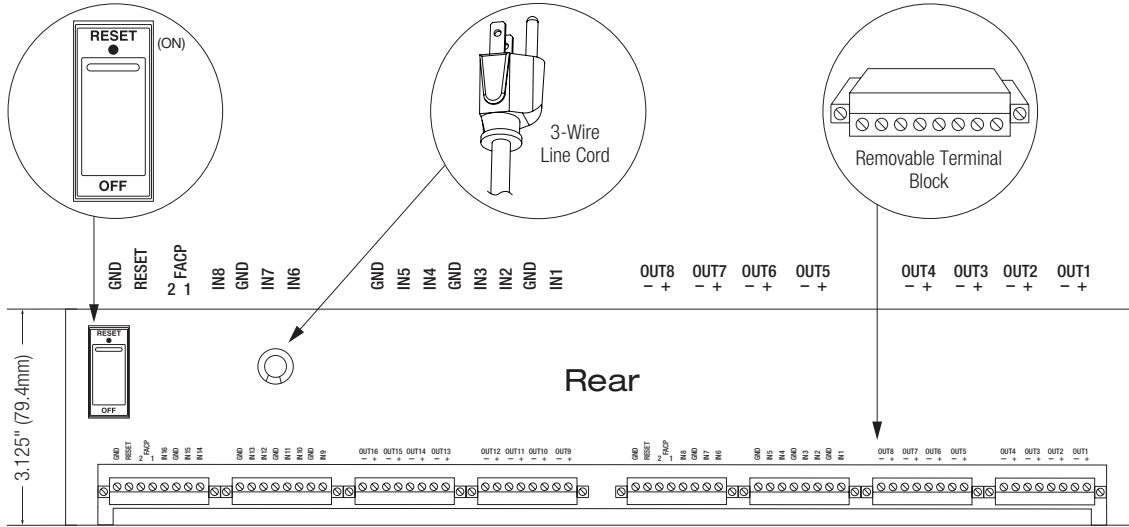

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com