Altronix®

Rev. 05012024

T2M7CK3 (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Altronix T2M7CK3 is a 8-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T2M7CK3 accommodates four (4) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt

Mercury™

T2M7CK3 - includes eFlow104NB, ACMS8, VR6, PDS8, wire harnesses and management

Mercury boards are not included

Key Features

- Accommodates the following Mercury controllers:
  4 - MR52
- Convenient knockout configuration:
  - One (1) single knockout - 2” Conduit
  - Sixteen (16) double knockouts - 1/2” Conduit and 3/4” Conduit
- Unit includes:
  - Removable backplane
  - Wire management
  - Custom wire assemblies for power distribution with terminal blocks for controller connections
- Supervision
  - AC Fail
  - Battery Fail and Battery Presence
  - Low power shutdown
- CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/7AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2M7CK3 (Pre-wired Kit)

Access and Power Integration Solution for Mercury

Specifications

Power Supply (eFlow104NB):

Input
- Voltage: 120VAC, 60Hz, 4.5A max
- Input Fuse: 6.3A/250V

Output
- Voltage: 24VDC @ 10A
- Auxiliary: 1A (unswitched)
- Protection: Overvoltage protection. Filtered and regulated

Battery Charging
- Capacity: 12VDC/7AH (4 within enclosure)
  40AH/65AH (requires separate enclosure)
- Type: Sealed lead acid or gel type
- Failover: Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect
- Supervised: Latching or non-latching
- EOL: 10K Resistor

Supervision
- AC Failure: Form "C" contacts
- Battery: Form "C" contacts
- Low DC Power Shutdown
  Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply).
  Prevents deep battery discharge

Indicators (LED)
- AC Input: 120VAC is present
- DC Output: 24VDC is present
- Battery: Discharged or not connected

Dual Input Access Power Controller (ACMS8):

Input
- Voltage: 24VDC from eFlow104NB and 12VDC from VR6
- Input Fuses: 15A/32V

Outputs
- Voltage: 12VDC and/or 24VDC

Eight (8) selectable independently controlled outputs or eight (8) indepently controlled Form "C" relay outputs:
a) Fail-Safe and/or Fail-Secure power outputs
b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated
c) Auxiliary power outputs (unswitched)
d) Any combination of the above

Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2
Individual outputs may be set to OFF position for servicing
- Output Fuses: 3A/32V

Indicators (LED)
- Red LEDs: Outputs are triggered (relays energized)
- Blue LED: FACP disconnect is triggered
- Individual voltage LEDs:
  - Green: 12VDC
  - Red: 24VDC

Voltage Regulator (VR6):

Input
- Voltage: 24VDC from eFlow104NB

Output
- Voltage: 12VDC
- Current: 6A continuous
- Other: Surge suppression

Indicators (LED)
- Input: 24VDC is present
- Output: Powered

Dual Input Power Distribution Module (PDS8):

Input
- Voltage: 24VDC from eFlow104NB and 12VDC from VR6
- Input Fuses: 10A/32V

Outputs
- Voltage: 12VDC and/or 24VDC

Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2
Individual outputs may be set to OFF position for servicing
- Output Fuses: 3A/32V

Indicators (LED)
- DC Output: Eight (8) individual output LEDs
- Green: 12VDC
- Red: 24VDC

T2M7CK3 Kit:

Agency Listings
- CE: European Conformity

All components of this Trove kit are UL Listed sub-assemblies
Please refer to the corresponding Sub-Assembly Installation Guides for further information

Physical and Environmental:
- Dimensions (H x W x D)
  - Enclosure: 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
  - Shipping: 32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)
- Weight (approx.)
  - Product: 41.6 lb. (18.87 kg)
  - Shipping: 45.6 lb. (20.68 kg)
- Temperature
  - Operating: 0ºC to 49ºC (32ºF to 120ºF)
  - Storage: – 20ºC to 70ºC (– 4ºF to 158ºF)
- Relative Humidity: 85% +/– 5%
- BTU/Hr. (approx.): 145 BTU/Hr.

Altronix®

T2M7CK3 (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

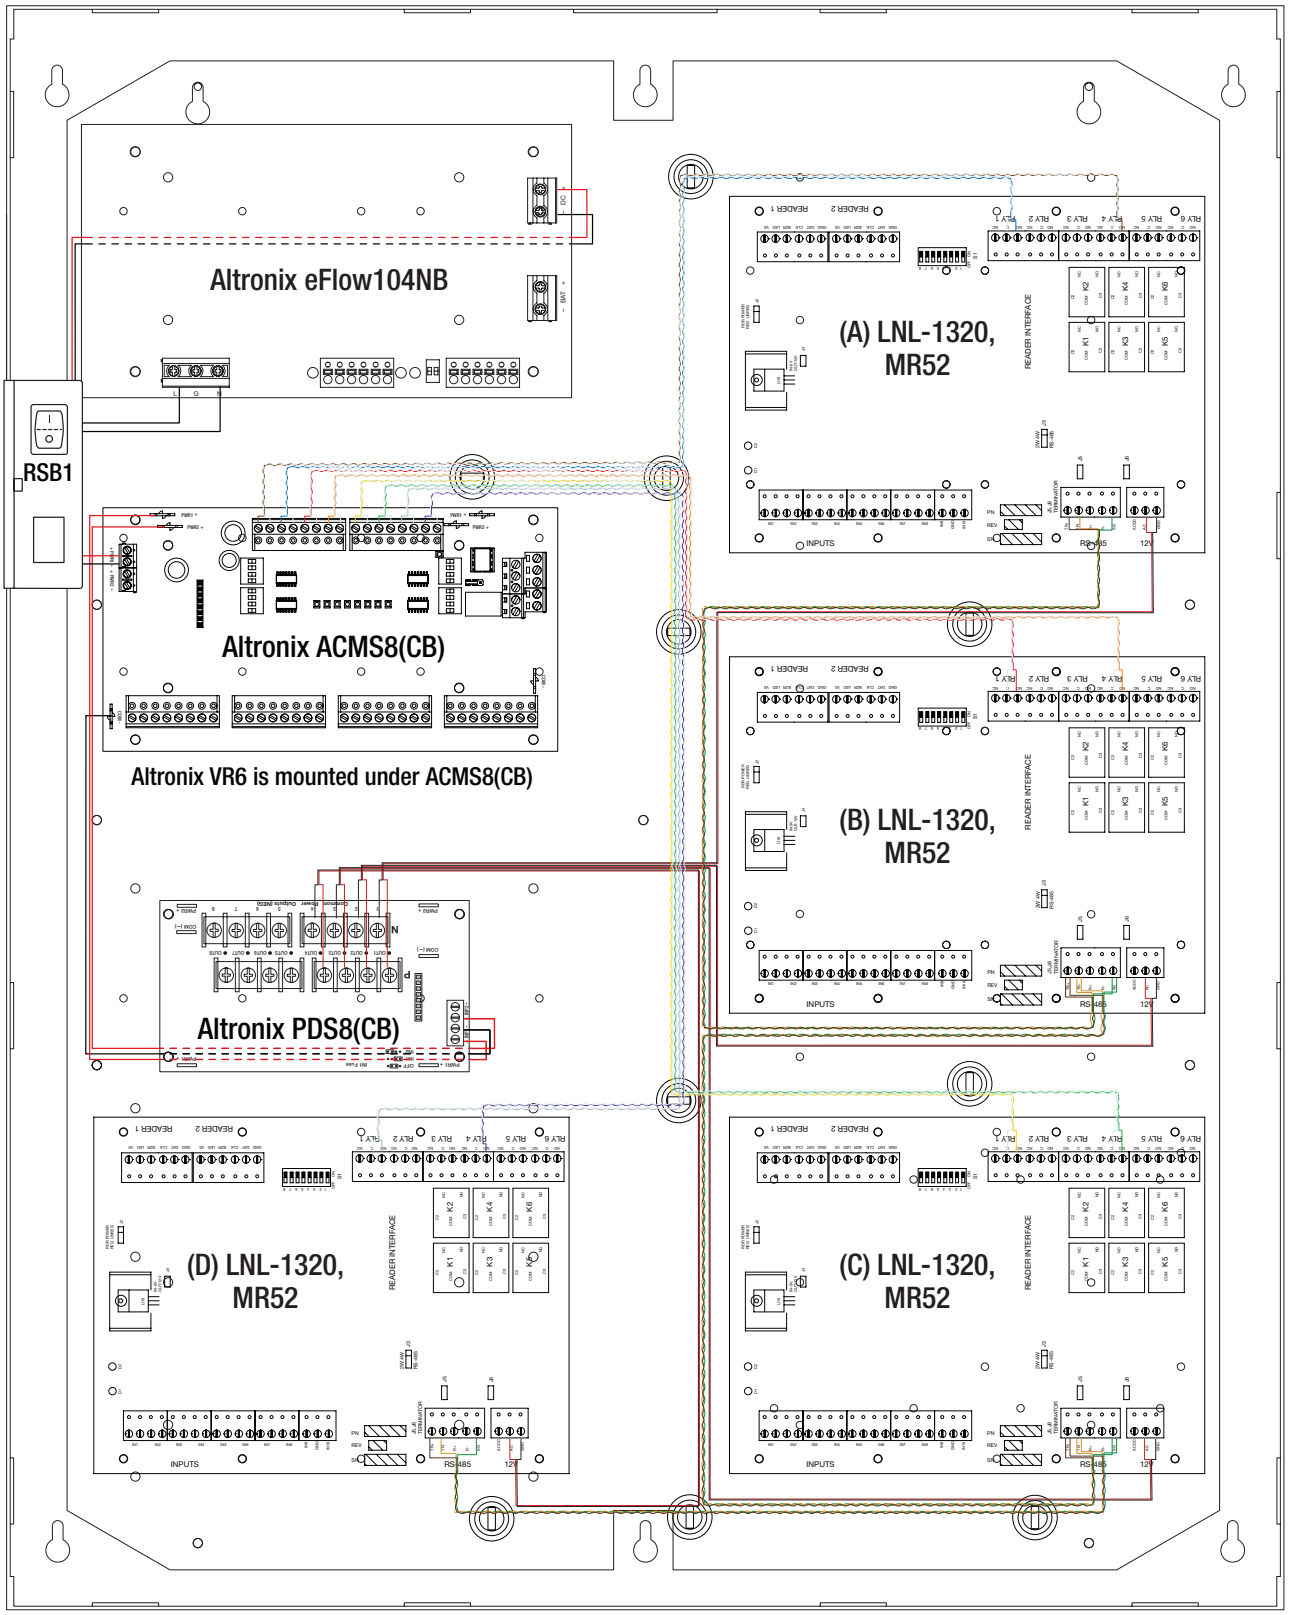

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2M7CK3 (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Accessories (order separately)

LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC with batteries

Trove2BWC with wires

TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution.The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets.Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2M7CK3 (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25” x 21.5” x 6.5” (692.2mm x 546.1mm x 165.1mm)

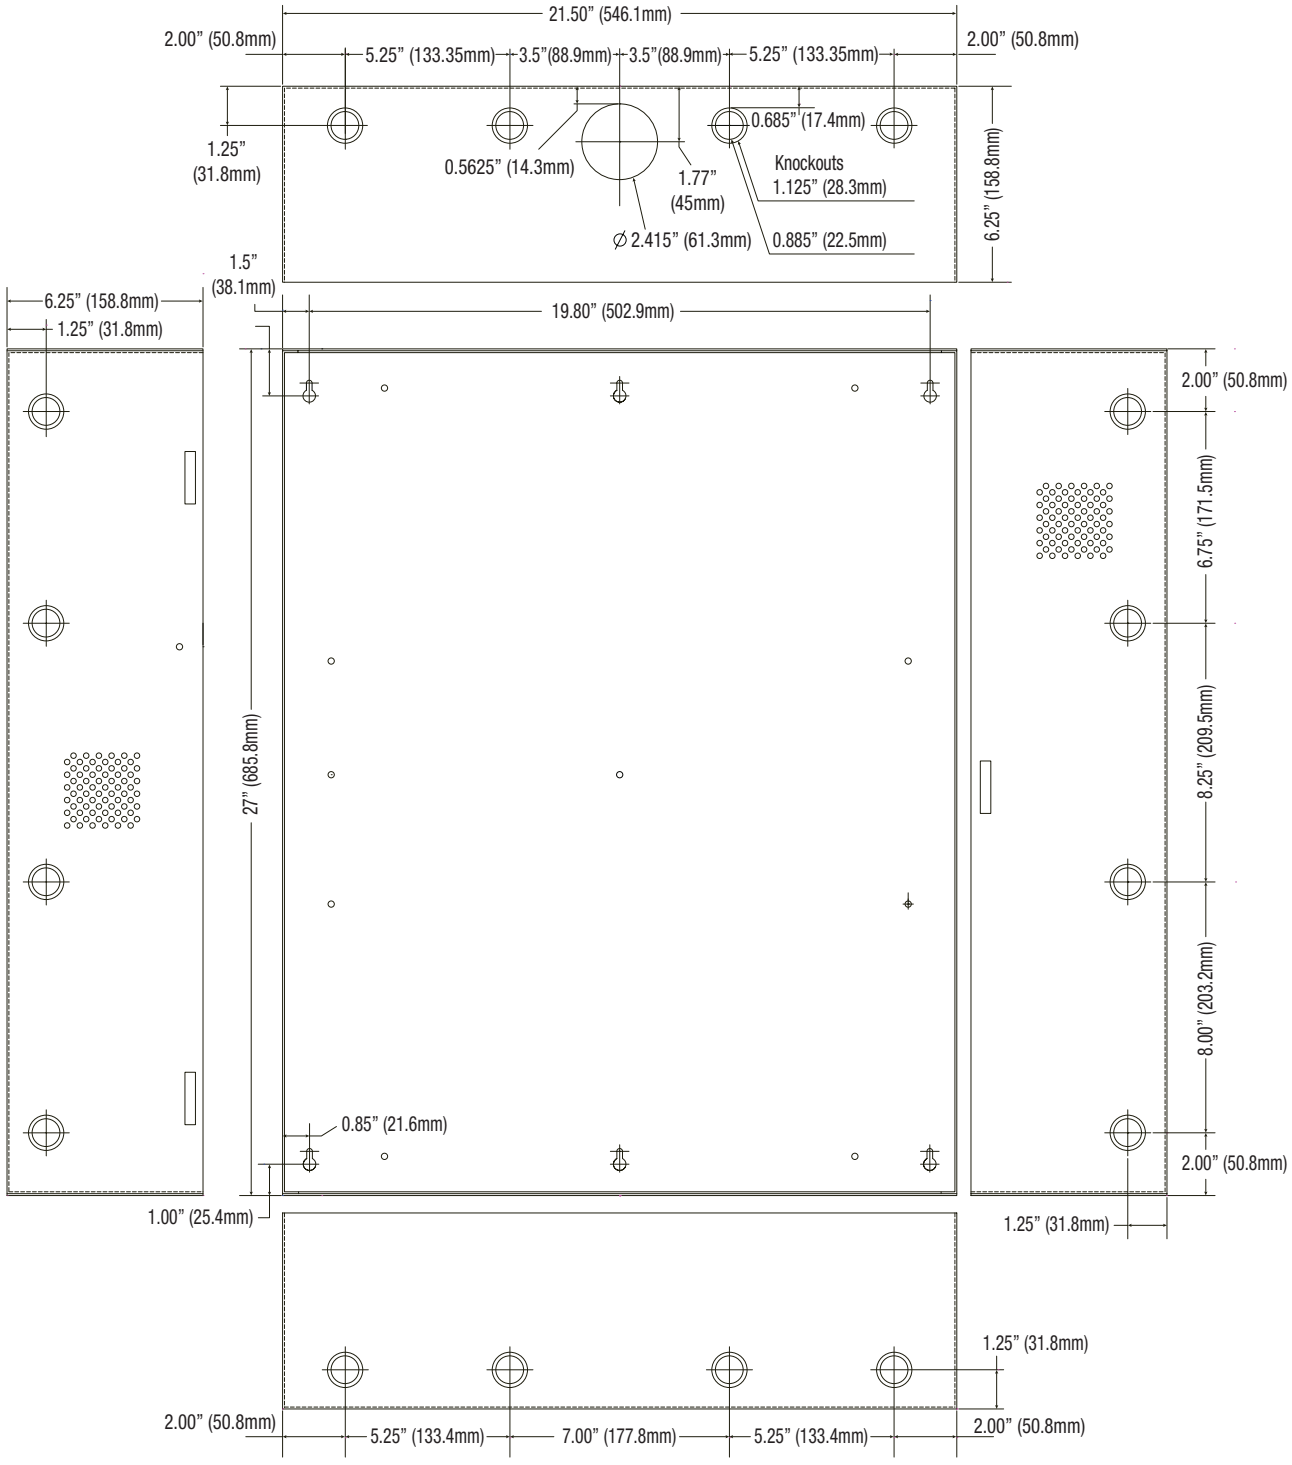

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com