


## NetWay4E1BTPL

4-port Hardened 4PPoE (802.3bt) Switch with Integral Power on a Backplane

Altronix NetWay4E1BTPL supports up to 90W per port (240W total power) for deploying the latest high-powered IP devices in remote locations. It is equipped with one (1) 1Gb SFP port to transmit data at long distances and four (4) 802.3bt compliant Ethernet ports. NetWay4E1BTPL accommodates single/multi-mode fiber or composite cable (fiber+copper) to simultaneously deliver power and data from NetWay Spectrum head-end media converters/injectors.

**netway**  
SPECTRUM

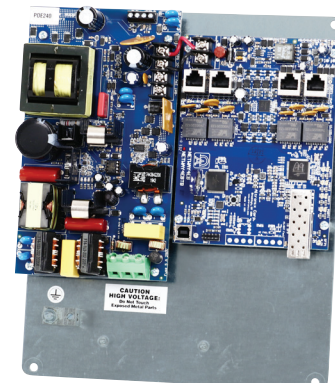

NetWay4E1BTPL

### Key Features

- Four (4) 10/100/1000 Mbps Ethernet ports rated at 90W each (limited to 240W total power)
- IEEE 802.3af, 802.3at, 802.3bt compliant
- One (1) Gigabit SFP port
- Built-in charger for LiFePO<sub>4</sub> (Lithium Iron Phosphate) or sealed lead acid or gel type batteries
- CE European Conformity
- Switch and power supply are factory mounted on a backplane

### Similar products


<b>NetWay4E1BTWPX</b>	Outdoor 4-port Hardened 4PPoE Switch with Integral Power in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries
<b>NetWay4E1BTWP</b>	Outdoor 4-port Hardened 4PPoE Switch with Integral Power in NEMA 4/4X, IP66-11 enclosure
<b>NetWay4E1BTWPN</b>	Outdoor 4-port Hardened 4PPoE Switch in NEMA 4/4X, IP66-11 enclosure
<b>NetWay4E1BTX</b>	4-port Hardened 4PPoE Switch with Integral Power in NEMA 1 Rated indoor enclosure
<b>NetWay4E1BTB</b>	4-port Hardened 4PPoE Switch (board only)

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: [info@altronix.com](mailto:info@altronix.com) | [www.altronix.com](http://www.altronix.com)

## Typical Application

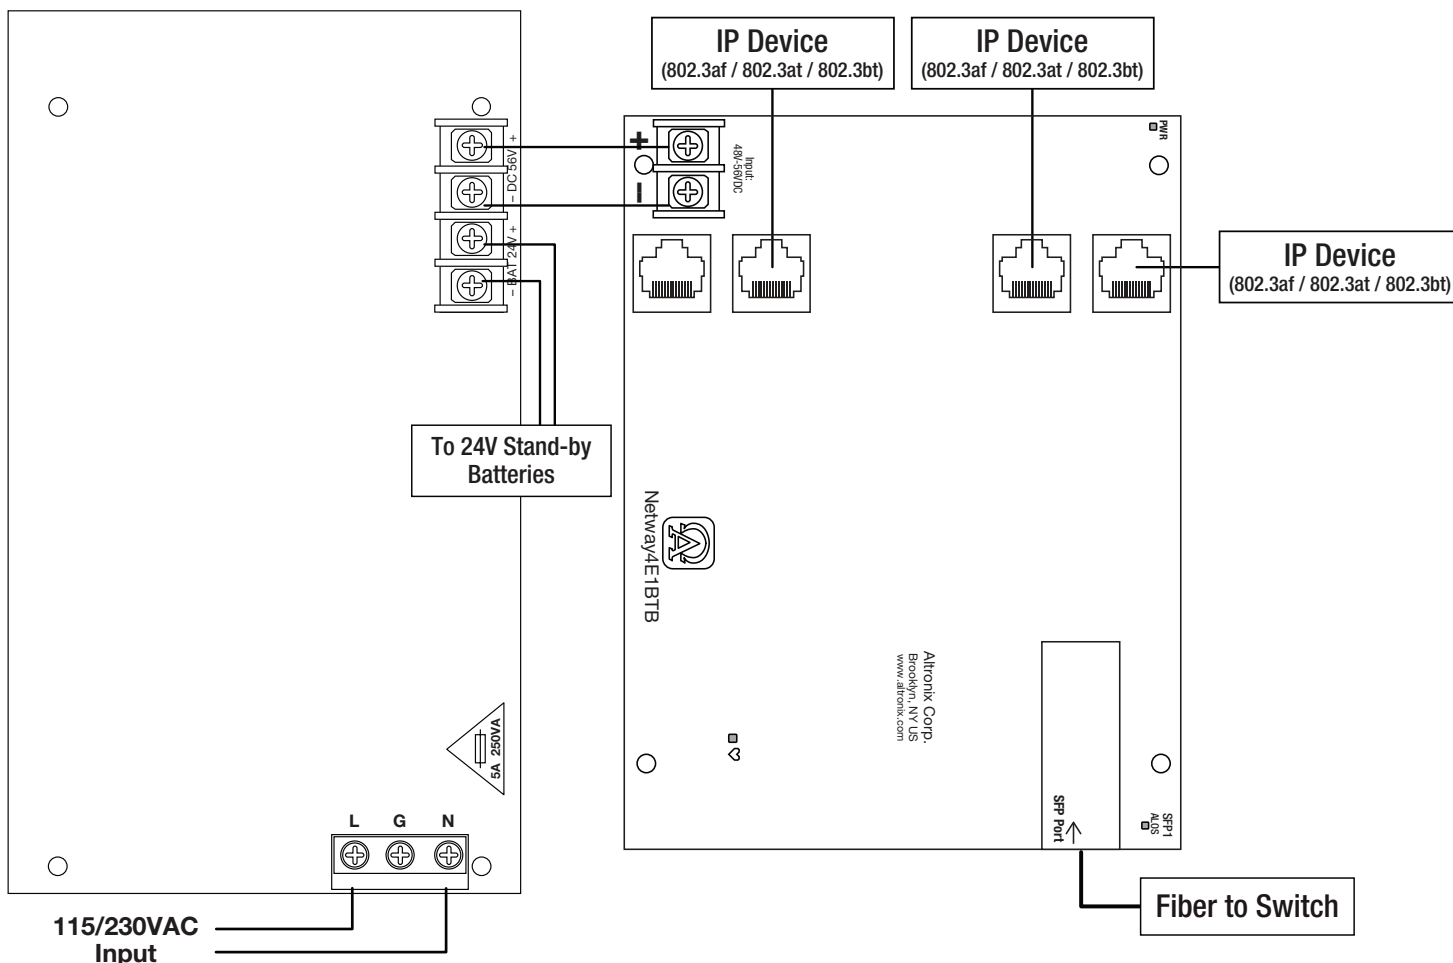

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

### Specifications

#### Input

Voltage	115VAC, 60Hz, 1.8A or 230VAC, 50/60Hz, 1A
Fusing	5A/250V

#### Power Output

Maximum Power	Four (4) PoE ports rated at 90W each, 240W total power max. IEEE 802.3af (15W), IEEE 802.3at (30W), IEEE 802.3bt (90W) compliant Integral surge protection
---------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------

**SFP Ports:** One (1) Gigabit SFP port

**Ethernet Ports:** Four (4) 10/100/1000 Mbps ports  
Connectivity: RJ45, auto-crossover  
Wire type: 4-pair CAT5e or higher structured cable  
Speed: 10/100/1000 Mbps, half/full duplex, auto negotiation

#### Battery Charging

Type	24VDC charging circuit charges LiFePO <sub>4</sub> (Lithium Iron Phosphate) or sealed lead acid or gel type batteries (require separate ventilated enclosure)
------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Failover** Upon AC loss, instantaneous  
Batteries are sold separately

#### Indicators (LED)

Individual PoE On LEDs for each port  
Individual IP Link status, 10/100/1000 Base-T/active LEDs for each port  
ALOS LED indicates fiber connection for SFP port  
Heartbeat LED indicates proper operation of the unit

#### Agency Listings

CE European Conformity

#### Physical and Environmental

##### Dimensions (H x W x D)

Backplane:	10.75" x 8.875" x 2.375" (273.1mm x 225.4mm x 60.3mm)
Shipping:	12" x 10" x 8" (304.8mm x 254mm x 203.2mm)

##### Weight (approx.)

Product:	2.6 lb. (1.18 kg)
Shipping:	4.0 lb. (1.81 kg)

##### Temperature

Operating (240W):	-30°C to 55°C (-22°F to 131°F)
Operating (180W):	-30°C to 65°C (-22°F to 149°F)
Operating (150W):	-30°C to 75°C (-22°F to 167°F)
Storage	-30°C to 85°C (-22°F to 185°F)

**Relative Humidity** 85% +/- 5%

**BTU/Hr (approx.)** 61 BTU/Hr.

**Operating Altitude:** -304.8 to 2,000m

### Accessories (order separately)



#### SFP Modules - Hot Pluggable Transceivers

P1MM	Multi-Mode SFP Module for distances up to 550m
P1SM10	Single-Mode SFP Module for distances up to 10km
P1AB2K	Single Strand SFP Module for distances up to 2km
P1GCE	Copper SFP Module for distances up to 100m



#### NetWaySP1A

Ethernet over Fiber Media Converter/Repeater for Applications Requiring an Additional SFP (Fiber) Port

NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).

#### Lifetime Warranty