Altronix®

Rev. 06072023

T2MK3F4D (Kit)

Access & Power Integration Solution for Mercury

TROVE™

Altronix T2MK3F4D kit consists of Trove2 enclosure and TM2 Altronix & Mercury backplane with 12VDC or 24VDC (factory set at 24VDC) @ 6A power supply/charger, 12VDC voltage regulator, eight (8) PTC protected output dual voltage power distribution module and four (4) PTC protected output access control module. This kit also accommodates various combinations of Mercury* boards for up to four (4) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

*Also compatible with these authentic Mercury partners:
AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2, Schneider Electric, Vanderbilt

Mercury™

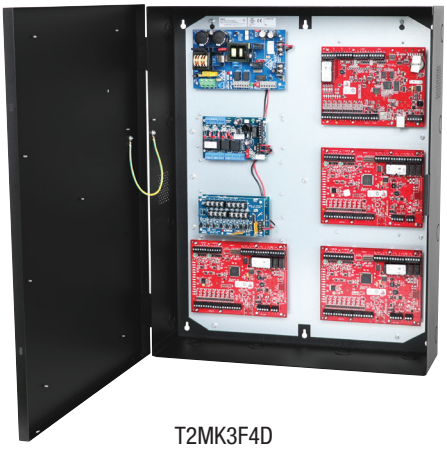

T2MK3F4D

Mercury boards are not included

Key Features

- 12VDC or 24VDC power supply/charger
- Accommodates the following Mercury controllers:
  Mercury: LP1501, LP1502, LP2500, LP4502, MR16IN, MR16OUT, MR50, MR52, MR62e, MUX8
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Sixteen (16) double knockouts
    1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
    - UL: UL294 - Access Control System
    - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- Lifetime Warranty*

Altronix Power Supply/Chargers and Sub-Assemblies only

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2MK3F4D (Kit)

Access & Power Integration Solution for Mercury

Specifications

Power Supply/Charger (eFlow6NB):

Input
- Voltage: 120VAC, 60Hz. 3.5A
- Input Fuse: 5A/250V

Output
- Voltage: 24VDC
- Current: 6A continuous
- Auxiliary: 1A (unswitched)
- Other: Overvoltage protection. Filtered and regulated

Battery Charging
- Capacity: 12VDC/12AH (4 within enclosure)
  40AH/65AH (requires separate enclosure)
- Type: Sealed lead acid or gel type
- Failover: Upon AC loss, instantaneous

Batteries are sold separately

Supervision
- AC Failure: Form "C" contacts
- Battery: Form "C" contacts
- Low DC Power Shutdown
  Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)
  Prevents deep battery discharge

Indicators (LED)
- Input: 120VAC is present
- DC Output: Powered
- Battery: Discharged or not connected

Dual Input Power Distribution Module (PDS8CB):

Input
- Voltage: 24VDC from eFlow6NB and 12VDC from VR6
- Input PTCs: 9A

Outputs
- Voltage: 12VDC and/or 24VDC

Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2
Individual outputs may be set to OFF position for servicing

- Output PTCs: 2.5A

Indicators (LED)
- DC Output: Eight (8) individual output LEDs
  - Green: 12VDC
  - Red: 24VDC

Voltage Regulator (VR6):

Input
- Voltage: 24VDC from eFlow6NB

Output
- Voltage: 12VDC
- Current: 6A continuous
- Other: Surge suppression

Indicators (LED)
- Input: 24VDC is present
- Output: Powered

Access Power Controller (ACM4CB):

Input
- Voltage: 24VDC from eFlow6NB
- Input PTC: 9A

Outputs
- Voltage: 24VDC

Four (4) independently controlled PTC outputs:
a) Fail-Safe and/or Fail-Secure power outputs
Form "C" Relays rated 28VAC or VDC @ 2.5A
b) Auxiliary power outputs (unswitched)
c) Any combination of the above

- Output PTCs: 2.5A

Indicators (LED)
- Red LEDs: Outputs are triggered (relays energized).
- Green LED: FACP disconnect is triggered.

T2MK3F4D Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies.
Please refer to the corresponding Sub-Assembly Installation Guides for further information

- CE: European Conformity

Physical and Environmental
- Dimensions (H x W x D)
  - Enclosure: 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
  - Shipping: 32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)
- Weight (approx.)
  - Product: 39.2 lb. (17.78 kg)
  - Shipping: 43 lb. (19.5 kg)
- Temperature
  - Operating: 0ºC to 49ºC (32ºF to 120ºF)
  - Storage: – 20ºC to 70ºC (– 4ºF to 158ºF)
- Relative Humidity: 85% +/– 5%
- BTU/Hr (approx.): 87 BTU/Hr.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2MK3F4D (Kit)

Access & Power Integration Solution for Mercury

Access Controller Position Chart for the Following Models:

Altronix/Mercury	Pem Mounting
LP2500, MUX8	A
LP1502, LP4502, MR52, MR16IN, MR16OUT	B
LP1501, MR62e	C
MR50	D



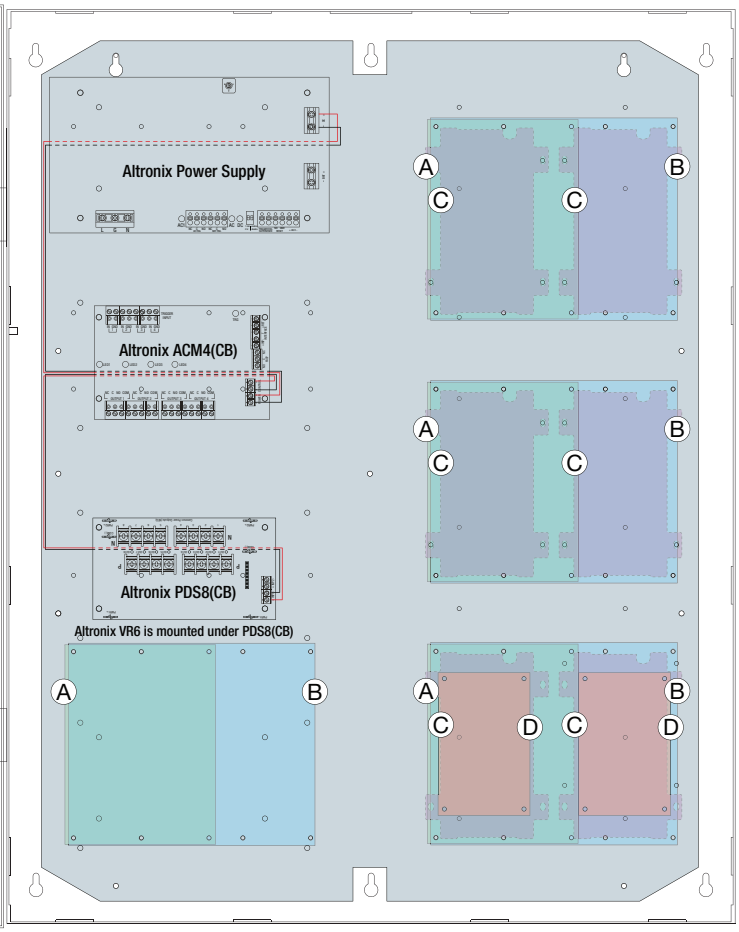

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2MK3F4D (Kit)

Access & Power Integration Solution for Mercury

Accessories (order separately)

LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC with batteries

Trove2BWC with wires

TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution.The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets.Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2MK3F4D (Kit)

Access & Power Integration Solution for Mercury

TROVE™

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

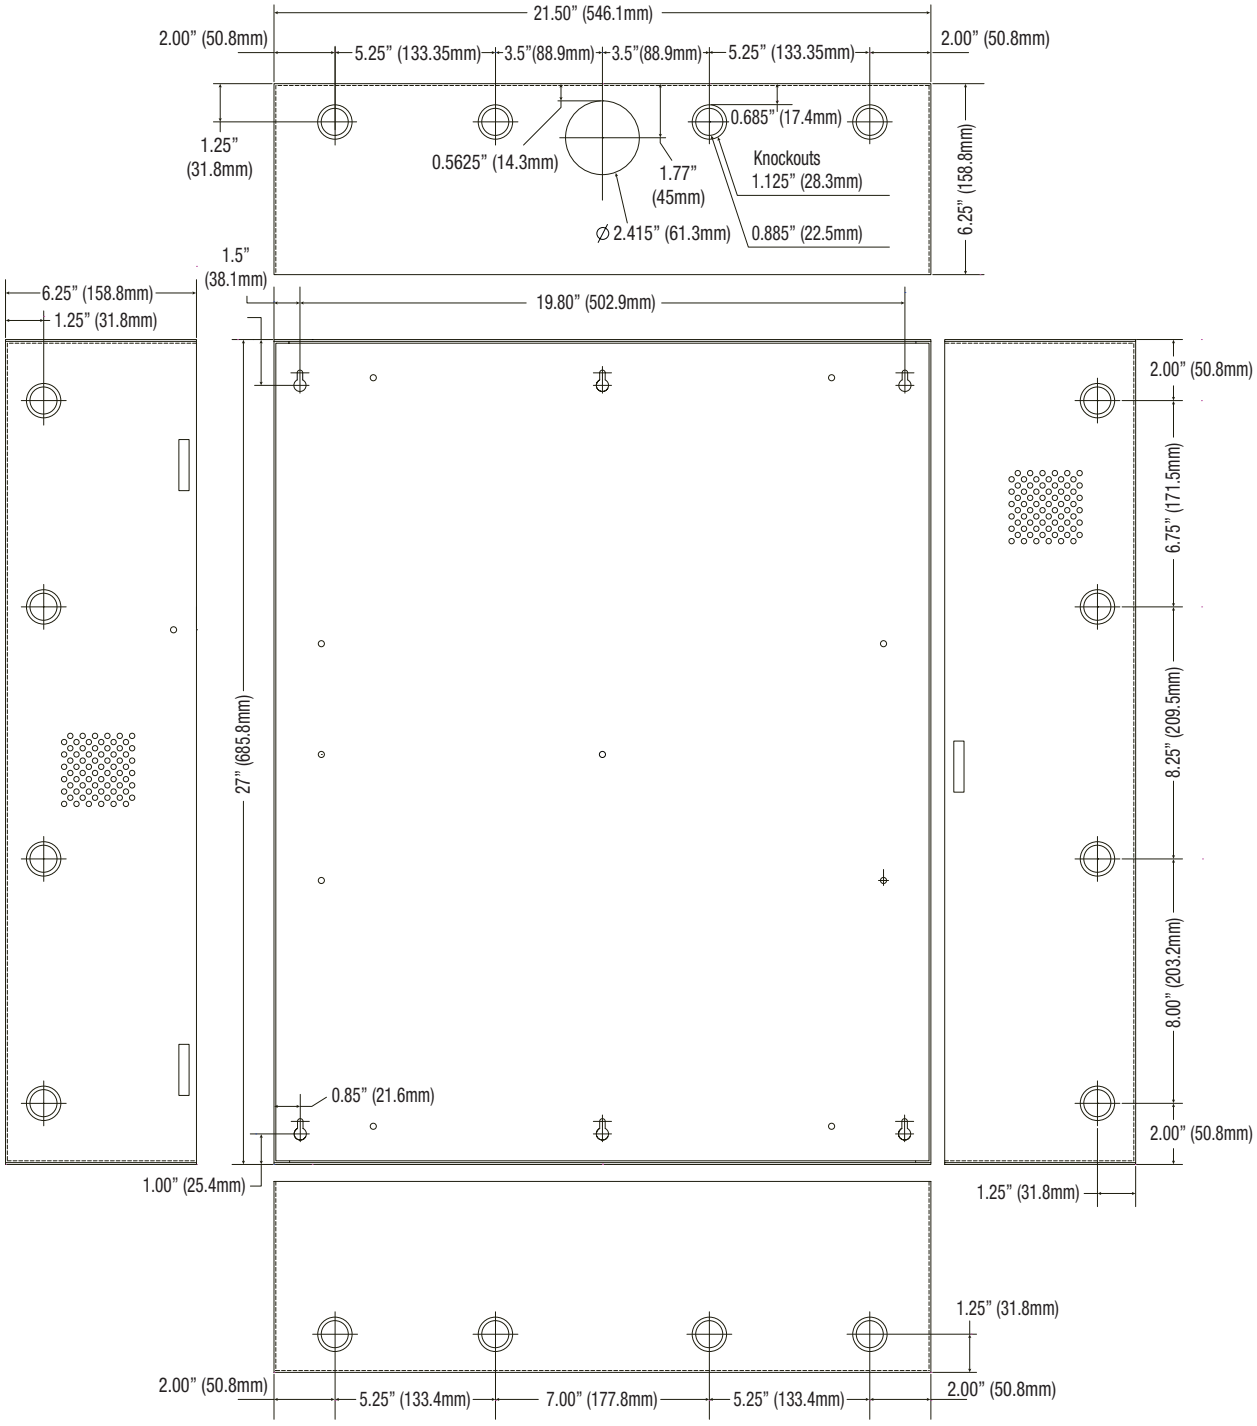

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com