Altronix®

Rev. 06082023

T2MK75F16 (Kit)

Access & Power Integration Solution for Mercury

TROVE™

Altronix T2MK75F16 kit consists of Trove2 enclosure, TM2 Altronix & Mercury backplane and TMV2 door backplane with 24VDC @ 10A and 12VDC @ 10A power supply/chargers, sixteen (16) fuse protected output power distribution module and two eight (8) fuse protected output access control modules. This kit also accommodates various combinations of Mercury* boards for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

*Also compatible with these authentic Mercury partners:
AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2, Schneider Electric, Vanderbilt

Mercury™

T2MK75F16

Mercury boards are not included

Key Features

- 24VDC and 12VDC power supply/chargers
- Accommodates the following Mercury controllers:
  Mercury: LP1501, LP1502, LP2500, LP4502, MR16IN, MR16OUT, MR50, MR52, MR62e, MUX8
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Sixteen (16) double knockouts
    1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
    - UL: UL294 - Access Control System
    - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- Lifetime Warranty*

Altronix Power Supply/Chargers and Sub-Assemblies only

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2MK75F16 (Kit)

Access & Power Integration Solution for Mercury

TROVE™

Specifications

Power Supply/Charger 1 (eFlow104NB):

Input

Voltage	120VAC, 60Hz, 4.5A
Input Fuse	6.3A/250V

Output

Voltage	24VDC @ 10A.
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated

Power Supply/Charger 2 (eFlow102NB):

Input

Voltage	120VAC, 60Hz, 3.5A
Input Fuse	5A/250V

Output

Voltage	12VDC @ 10A
Auxiliary	1A (unswitched).
Protection	Overvoltage protection. Filtered and regulated

Both Power Supplies:

Battery Charging

Capacity	12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

Indicators (LED)

AC Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

Power Distribution Module (PD16W):

Input

Voltage	12VDC from eFlow102NB

Outputs

Voltage	12VDC
Fuses	3.5A/250V

Indicators (LED)

Green LED	DC Output

Two (2) Access Power Controllers (ACM8):

Input

Voltage	24VDC from eFlow104NB
Input Fuse	10A/250V

Outputs

Voltage 24VDC

Eight (8) 24VDC independently controlled fused outputs:

a) Fail-Safe and/or Fail-Secure power outputs.
Form "C" Relays rated 28VAC or VDC @ 2.5A

b) Auxiliary power outputs (unswitched)

c) Any combination of the above

Output Fuses 3.5A/250V

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T2MK75F16 Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

Shipping:
32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

Product	49 lb. (22.23 kg)
Shipping	53.35 lb. (24.2 kg)

Temperature

Operating	0ºC to 49ºC (32ºF to 120ºF)
Storage	– 20ºC to 70ºC (– 4ºF to 158ºF)

Relative Humidity	85% +/– 5%
BTU/Hr (approx.):	217 BTU/Hr.

T2MK75F16 (Kit)

Access & Power Integration Solution for Mercury

Access Controller Position Chart for the Following Models:

Altronix/Mercury	Pem Mounting
LP2500, MUX8	A
LP1502, LP4502, MR52, MR16IN, MR16OUT	B
LP1501, MR62e	C
MR50	D

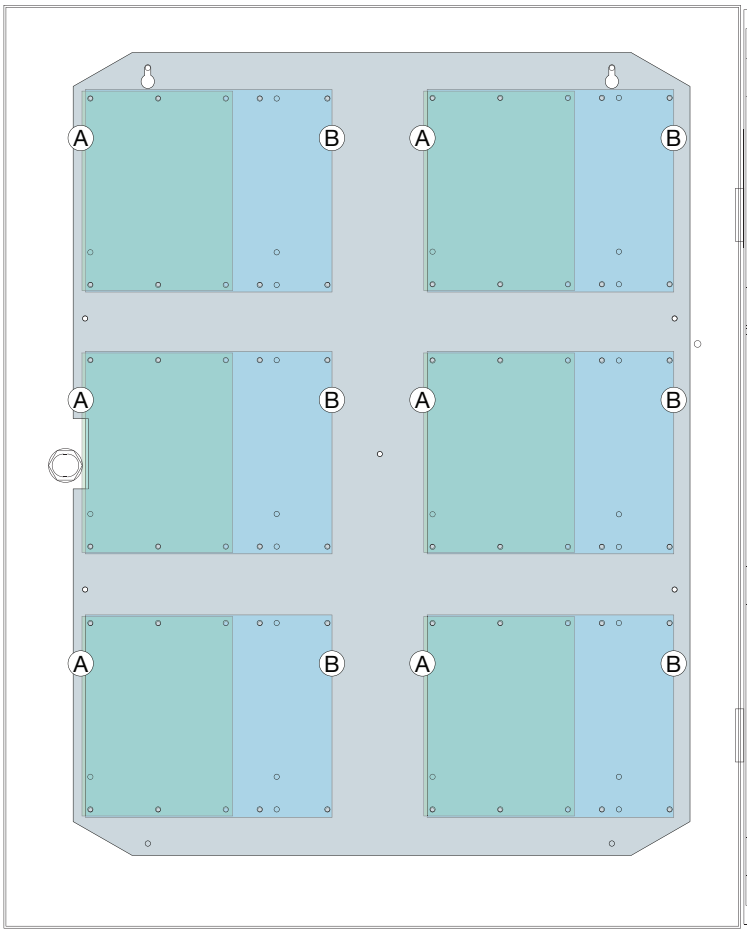

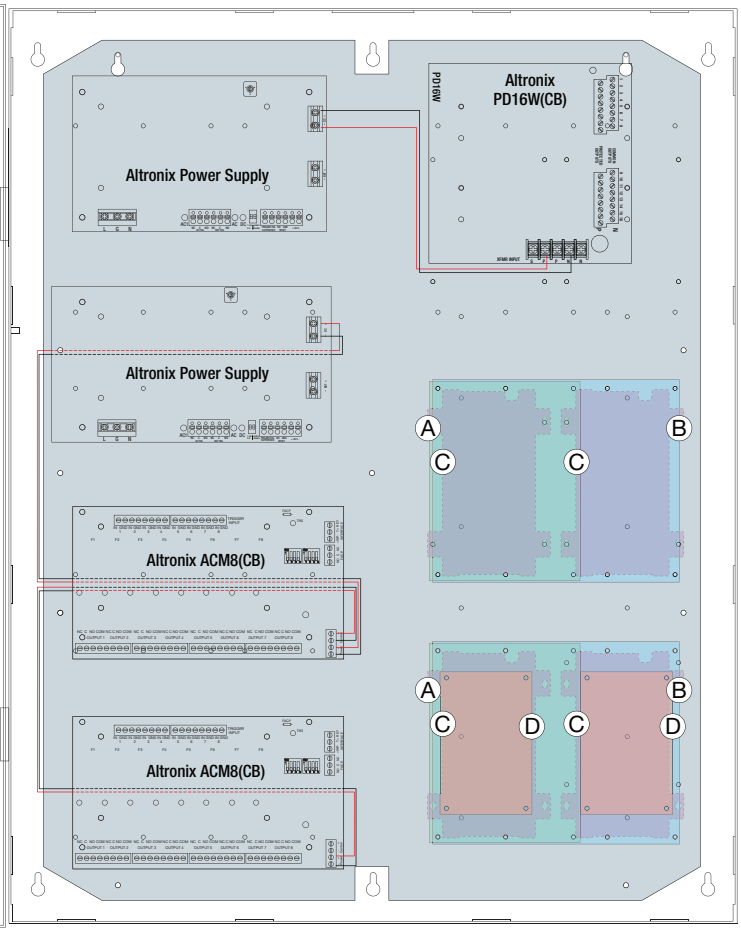

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2MK75F16 (Kit)

Access & Power Integration Solution for Mercury

Accessories (order separately)

LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC with batteries

Trove2BWC with wires

TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution.The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets.Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2MK75F16 (Kit)

Access & Power Integration Solution for Mercury

TROVE™

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

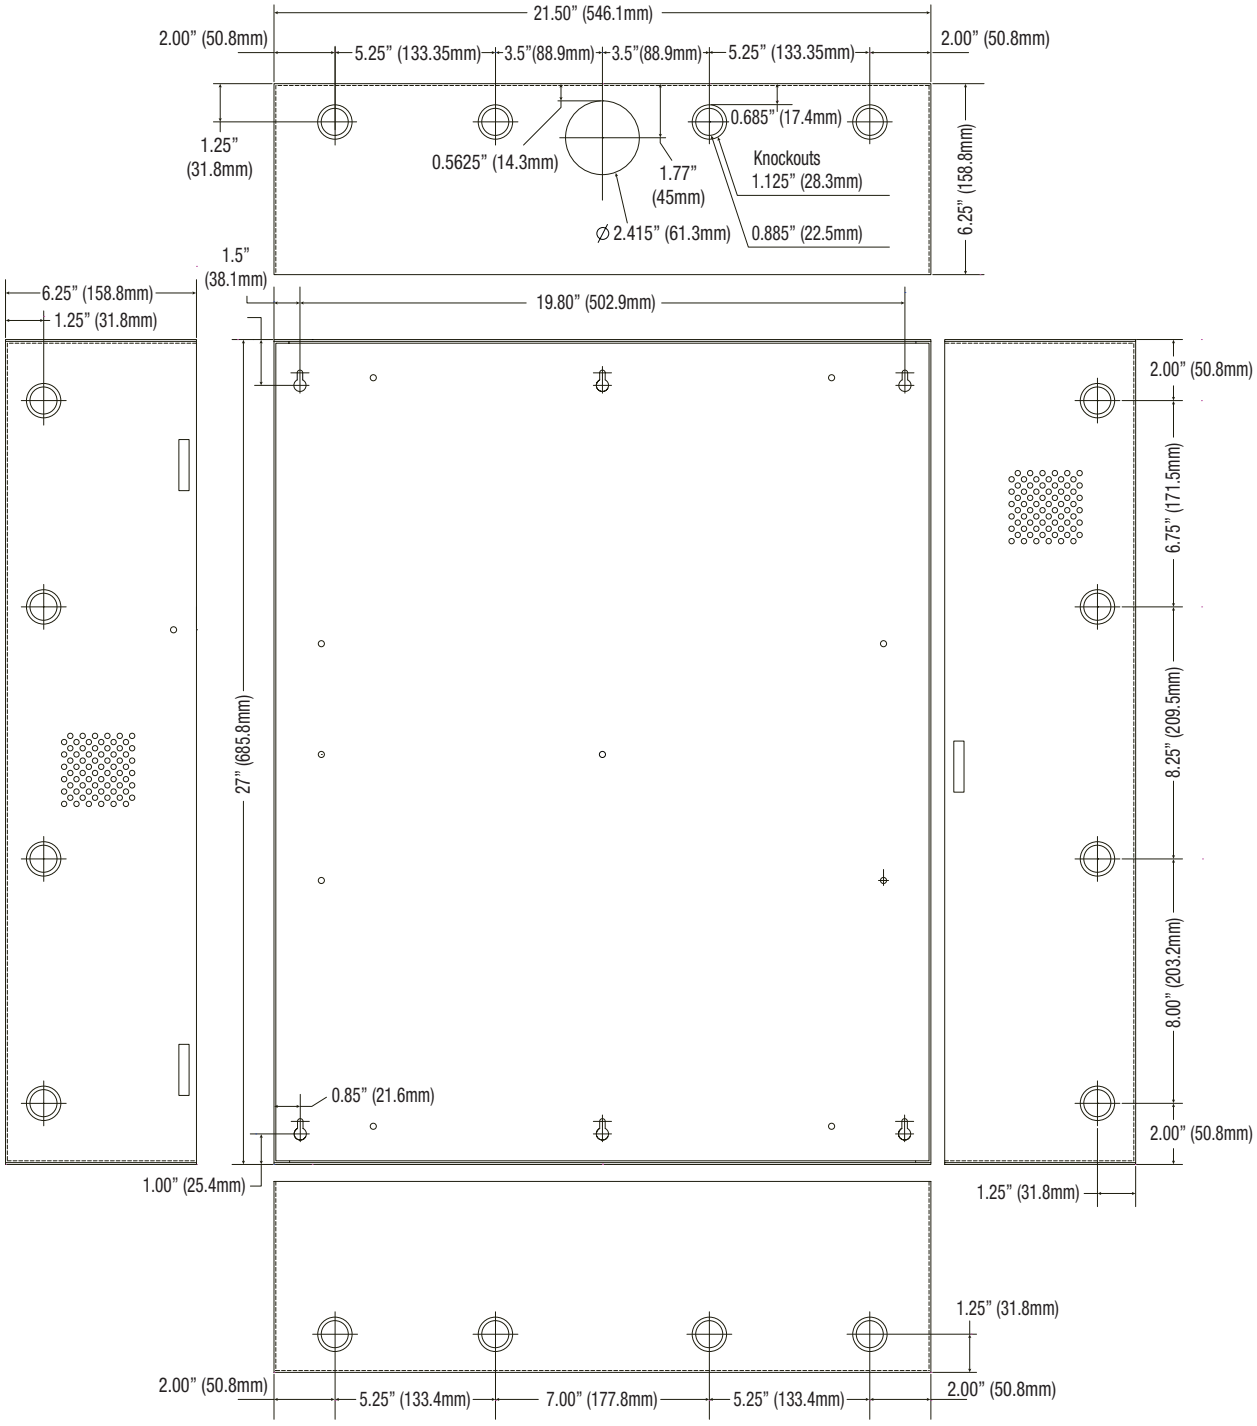

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com