


NetWaySP41BTX3

4-port Hardened Indoor 4PPoE (802.3bt) Switch with Integral Power



Altronix NetWaySP41BTX3 supports up to 90W per port (360W total power) for deploying the latest high-powered IP devices in remote locations. It is equipped with two (2) 1Gb SFP ports to transmit data at long distances and four (4) 802.3bt compliant Ethernet ports. NetWaySP41BTX3 accommodates single/multi-mode fiber or composite cable (fiber+copper) to simultaneously deliver power and data from NetWay Spectrum head-end media converters/injectors.

For managed switch see model NetWaySP4BTX3

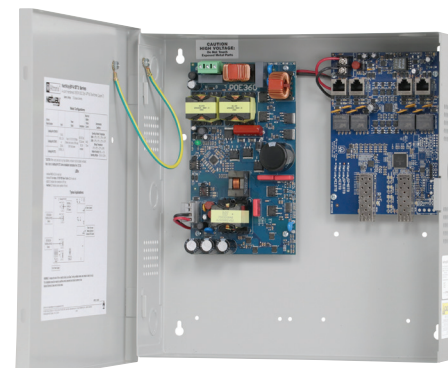

NetWaySP41BTX3

Key Features


- Four (4) 10/100/1000 Mbps Ethernet ports rated at 90W each (limited to 360W total power)
- IEEE 802.3af, 802.3at, 802.3bt compliant
- Two (2) Gigabit SFP ports
- Built-in charger for sealed lead acid or gel type batteries
- CE European Conformity
- NEMA 1 Rated enclosure for indoor use

Similar products

NetWaySP41BTWPX3	Outdoor 4-port Hardened 4PPoE Switch with Integral Power in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries
NetWaySP41BTWP3	Outdoor 4-port Hardened 4PPoE Switch with Integral Power in NEMA 4/4X, IP66-11 enclosure
NetWaySP41BTPL3	4-port Hardened 4PPoE Switch with Integral Power on a Backplane

Lifetime Warranty

Typical Application

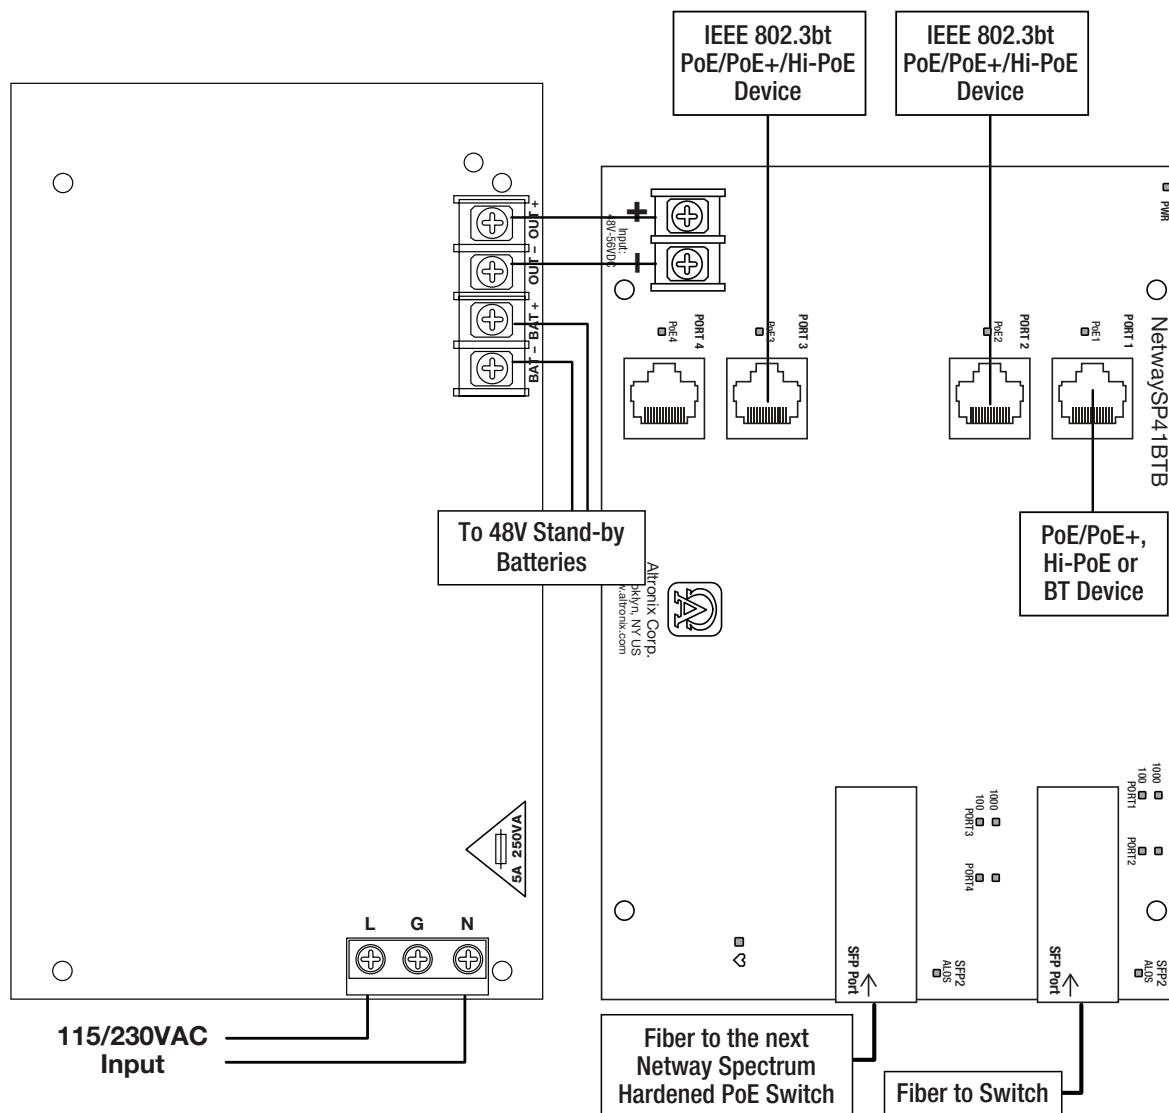

Accessories (order separately)



SFP Modules - Hot pluggable Transceivers

- P1MM** Multi-Mode SFP Module for distances up to 550m.
- P1SM10** Single-Mode SFP Module for distances up to 10km.
- P1AB2K** Single Strand SFP Module for distances up to 2km.
- P1GCE** Copper SFP Module for distances up to 100m.



NetWaySP1A - Ethernet over Fiber Media Converter/Repeater for Applications Requiring an Additional SFP (Fiber) Port

NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).

Lifetime Warranty



NetWaySP41BTX3

4-port Hardened Indoor 4PPoE (802.3bt) Switch with Integral Power



Specifications

Input

Voltage 115VAC, 60Hz, 3.5A or
230VAC, 50/60Hz, 2A

Input Fuse 5A/250V

Power Output

Maximum Power Four (4) PoE ports rated at 90W each,
360W total power
IEEE 802.3af (15W),
IEEE 802.3at (30W),
IEE 802.3bt (90W) compliant
Integral surge protection

SFP Ports: Two (2) Gigabit SFP ports

Ethernet Ports: Four (4) 10/100/1000 Mbps ports
Connectivity: RJ45, auto-crossover
Wire type: 4-pair CAT5e or higher
structured cable
Speed: 10/100/1000 Mbps,
half/full duplex, auto negotiation

Battery Charging

Type 48VDC charging circuit charges
sealed lead acid or gel type batteries
(require separate ventilated enclosure)

Failover Upon AC loss, instantaneous

Batteries are sold separately

Indicators (LED)

Individual PoE On LEDs for each port

Individual IP Link status, 10/100/1000 Base-T/active
LEDs for each port

ALOS LED indicates fiber connection for SFP port

Heartbeat LED indicates proper operation of the unit

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure: 13.5" x 13" x 3.25"
(342.9mm x 330.2mm x 82.6mm)

Shipping: 15" x 13.875" x 4.75"
(381mm x 352.4mm x 120.6mm)

Weight (approx.)

Product: 6.85 lb. (3.11 kg)

Shipping: 7.75 lb. (3.51 kg)

Temperature

360W: - 30°C to 70°C (- 22°F to 158°F)

240W: - 30°C to 75°C (- 22°F to 167°F)

Storage - 30°C to 85°C (- 22°F to 185°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.) 183 BTU/Hr.

Operating Altitude: - 304.8 to 2,000m

Lifetime Warranty


Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Dimensions and Drawing

Dimensions (H x W x D approximate)

13.5" x 13" x 3.25" (342.9mm x 330.2mm x 82.6mm)

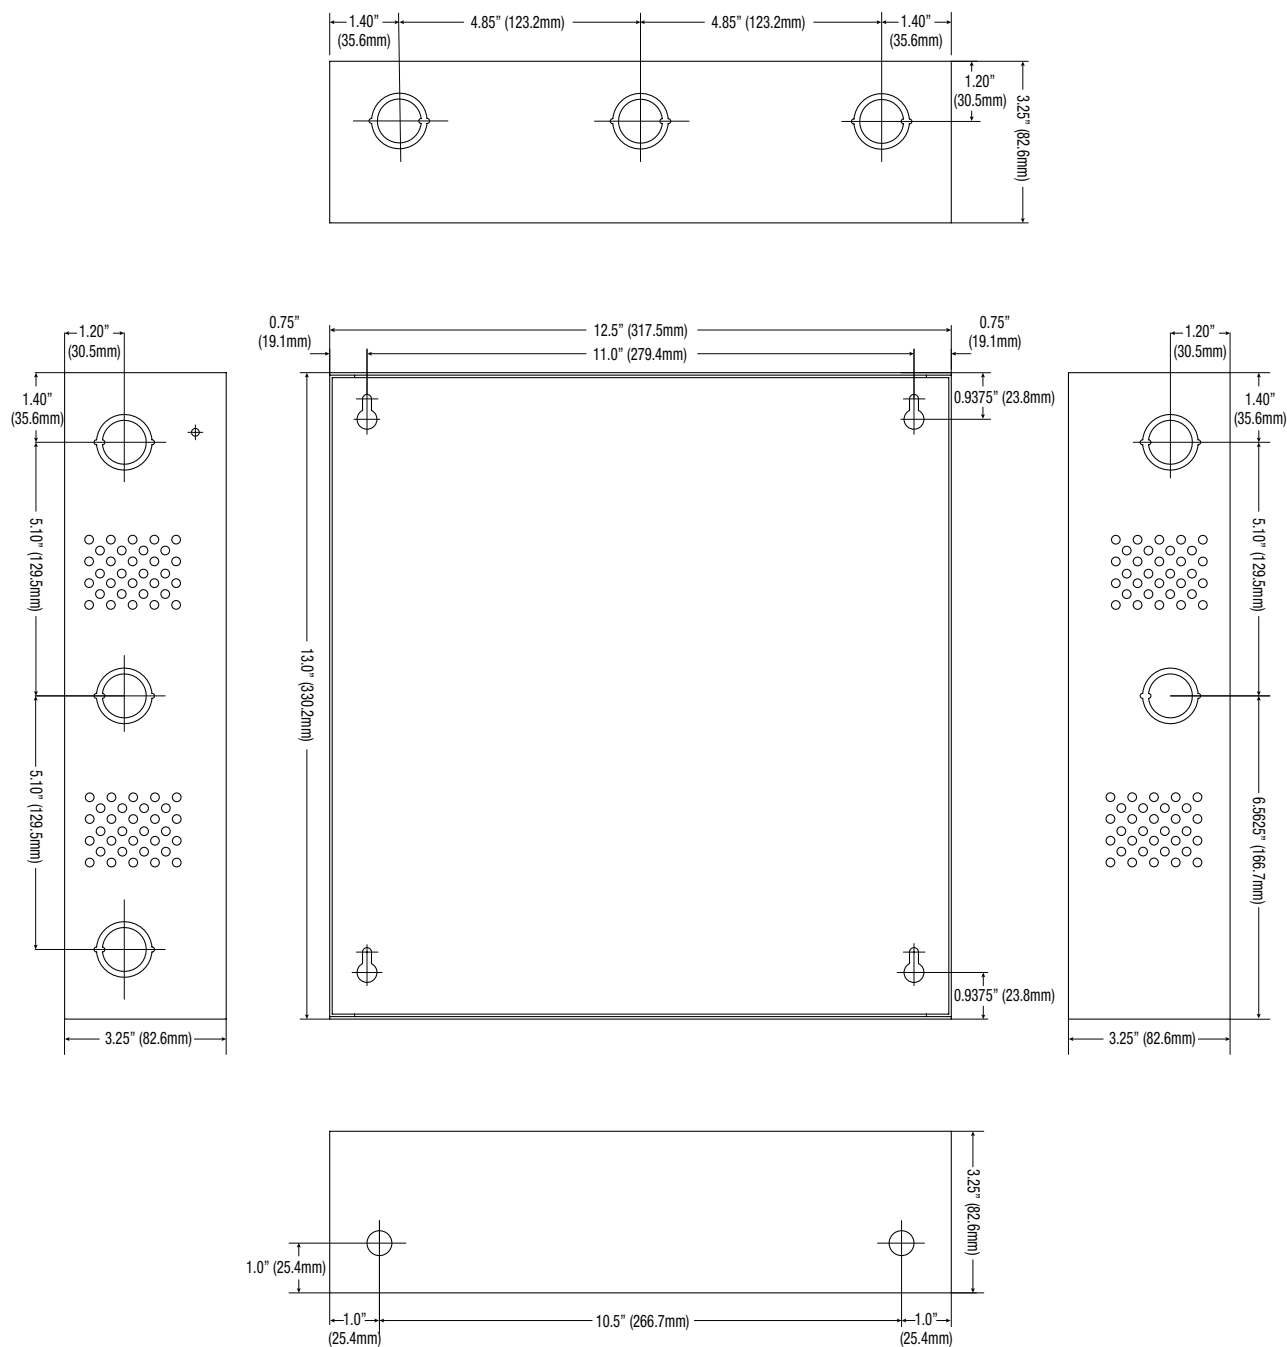

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com