

NetWaySP8BTWPXN

8-port Managed Hardened 4PPoE (802.3bt) Switch



Altronix NetWaySP8BTWPXN 8-port hardened switch board supports up to four (4) IP devices rated up to 90W and four (4) rated up to 30W (360W total power). It is equipped with two (2) 1Gb SFP ports to transmit data at long distances, for deploying the latest IP devices in remote locations. Embedded LINQ Technology allows to monitor, control, and report power and diagnostics from anywhere.



NetWaySP8BTWPXN

Key Features


- External 48-55V power supply required
 - Eight (8) 10/100/1000 Mbps Ethernet ports (limited to 360W total power)
 - Four IEEE 802.3af, 802.3at compliant ports and four IEEE 802.3af, 802.3at, 802.3bt compliant ports
 - Two (2) Gigabit SFP ports
 - VLAN (Virtual Local Area Networks) subnetwork allows for the grouping together of devices for improved network traffic and higher security
 - PoE activity LED indicators
- LINQ Technology:**
 - Remote network management allows for camera/device reset and diagnostic monitoring
 - Provides local and/or remote access to critical information via LAN/WAN
 - Email and Windows Dashboard Alert notifications report real-time events
 - Event log tracks history
 - NEMA 4/4X, IP66-11 enclosure
 - CE European Conformity
 - NDAA and TAA compliant
 - Lifetime Warranty

Similar products

NetWaySP8BTB	Hardened 802.3bt PoE Switch board
NetWaySP8BTWPXNN	Outdoor 8-port Hardened 802.3bt PoE Switch only in NEMA 4/4X, IP66-11 enclosure

Lifetime Warranty

Typical Application

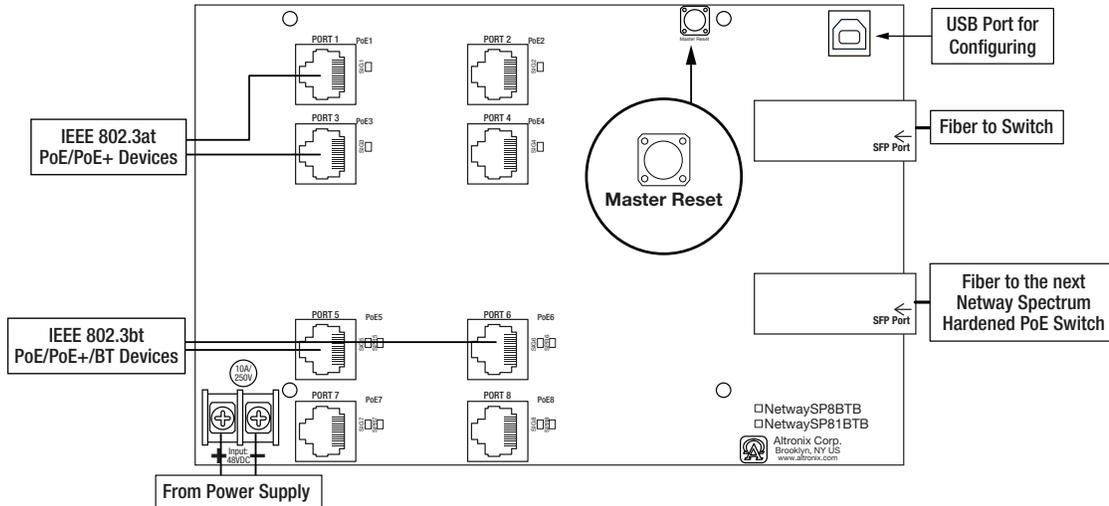

Specifications

Input	54VDC from POE360
Output	Eight (8) 10/100/1000 Mbps Ethernet ports - Four (4) ports rated at 90W each (IEEE 802.3bt compliant) - Four (4) ports rated at 30W each (IEEE 802.3af/802.3at compliant) - 360W total power max.
SFP Ports:	Two (2) Gigabit SFP ports
Ethernet Ports:	Eight (8) 10/100/1000 Mbps ports Connectivity: RJ45, auto-crossover Wire type: 4-pair CAT5e or higher structured cable Speed: 10/100/1000 Mbps, half/full duplex, auto negotiation
Indicators (LED)	Individual PoE On LEDs for each port Individual IP Link status, 10/100/1000 Base-T/active LEDs for each port ALOS LED indicates fiber connection for SFP port Heartbeat LED indicates proper operation of the unit
LINQ Technology:	Remote network management allows for camera/device reset and diagnostic monitoring Provides local and/or remote access to critical information via LAN/WAN Email and Windows Dashboard Alert notifications report real-time events Event log tracks history

VLAN:

Multiple management VLAN assignment
802.1Q Tagged VLAN
Up to 10 VLAN groups. ID Range 2-4095

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:	13.31" x 11.31" x 5.59" (338.1mm x 287.3mm x 142mm)
Shipping:	20.25" x 12.5" x 7.25" (514.4mm x 317.5mm x 184.2mm)

NEMA 4/4X, IP66-11 Rated enclosure for outdoor use

Weight (approx.)

Product:	10.5 lb. (4.76 kg)
Shipping:	11.9 lb. (5.4 kg)

Temperature

360W:	- 30°C to 70°C (- 22°F to 158°F)
Storage	- 30°C to 85°C (- 22°F to 185°F)

Relative Humidity

85% +/- 5%

Operating Altitude:

- 304.8 to 2,000m

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

NetWaySP8BTWPXN

8-port Outdoor Hardened 4PPoE (802.3bt) Switch



Power Sourcing Equipment and Accessories (order separately)



NetWaySP4PX - Ethernet to Fiber Media Converter with Integral Power Supply/Charger
 4-port Ethernet to Fiber Media Converter for applications utilizing composite (power + copper) or conventional cabling
 Unit provides power up to 120W per port (480W total power). Four (4) 1Gb SFP ports.



SFP Modules - Hot Pluggable Transceivers

- P1MM Multi-Mode SFP Module for distances up to 550m
- P1SM10 Single-Mode SFP Module for distances up to 10km
- P1AB2K Single Strand SFP Module for distances up to 2km
- P1GCE Copper SFP Module for distances up to 100m



NetWaySP1A

Ethernet over Fiber Media Converter/Repeater for Applications Requiring an Additional SFP (Fiber) Port
 NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).



PoE Power Supplies

POE240 - 240W Power Supply/Charger

Provides 240W for NetWay Spectrum switches.
 It also features a built-in charger for Lithium Iron Phosphate or sealed lead acid batteries.

POE360/POE367 - 360W Power Supply/Charger

Provides 360W for NetWay Spectrum switches.
 It also features a built-in charger for sealed lead acid or gel type batteries.



PMK1 - Pole Mount Kit

PMK1 pole mount kit is designed to simplify installation of outdoor units.
 It accommodates 2" - 8" (diameter) poles.



LOCK1WP - Pad Lock for Altronix Outdoor Enclosures

Altronix Lock1WP is a pad lock to secure the latches on Altronix outdoor enclosures.
 Includes a single pad lock and two (2) keys.



WG1 - NEMA Rated Wire Gland Inlet

Altronix WG1 facilitates wiring for all Altronix outdoor enclosures.

Lifetime Warranty

