

NetWayXTX

PoE/PoE+ Repeater



Altronix NetWayXTX repeater module interfaces with NetWay midspans to extend data (video) 100m. NetWayXTX is PoE/PoE+, IEEE 802.3af (15W) and IEEE 802.3at (30W) compliant. A maximum range of more than 600m is possible using multiple repeaters, based on camera/device port requirement.



NetWayXTX

Specifications

Data

Extends data 100m

Ethernet

10/100Mbps

Connectivity: RJ45, auto-crossover

Wire type: 4-pair CAT5e or better structured cable

Speed: 10/100 BaseT, half/full duplex, auto negotiation

Power

IEEE 802.3af (15W) and IEEE 802.3at (30W) compliant

Indicators (LED)

Green LED: Port status

Agency Listings

UL/cUL UL60950-1
(Information Technology Equipment)

CE European Conformity

Physical and Environmental

Dimensions (W x L x H)

3.8" x 2.5" x 1" (96.52mm x 63.5mm x 25.4mm)

Weight (approx.)

Product Weight: 0.2 lbs. (0.1 kg)

Shipping Weight: 0.25 lbs. (0.11 kg)

Temperature


Operating: 0°C to 49°C (32°F to 120.2°F)

Storage: -40°C to 70°C (-40° to 158°F)

Relative Humidity 85% +/-5%

Operating Altitude: -304.8 to 3,048m (-1000 to 10,000 ft.)

Typical Application

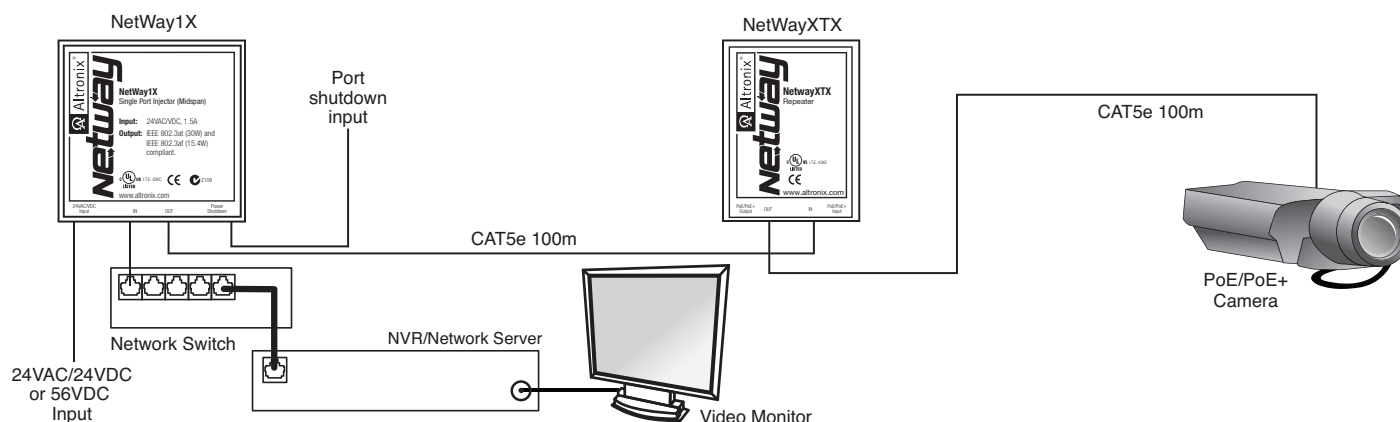

Lifetime Warranty