


T2VK7F8D (Kit)

Access & Power Integration Solution for HID Aero/VertX



Altronix T2VK7F8D kit consists of Trove2 enclosure, TV2 HID Aero/VertX/Altronix backplane with one (1) 24VDC @ 10A power supply/charger, one (1) PTC access power controller, one (1) voltage regulator and one (1) dual input PTC power distribution module.

This kit also accommodates up to four (4) HID Aero/VertX modules for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

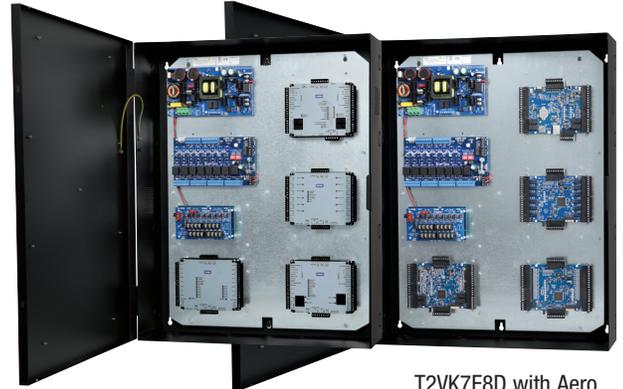

T2VK7F8D with Aero boards in cases

T2VK7F8D with Aero boards no cases

HID Aero/VertX modules are not included

Key Features

- 24VDC power supply/charger
- Accommodates up to four (4) VertX® V100, V200, V300, V1000, V2000 or Aero X100, X200, X300, X1100 modules
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems.
 - CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply (eFlow104NB):

Input	
Voltage	120VAC, 60Hz, 4.5A max.
Input Fuse	6.3A/250V
Outputs	
Voltage	24VDC
Current	10A continuous
Auxiliary	Class 2 power-limited @ 1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units. Prevents deep battery discharge

Indicators (LED)

Input	120VAC is present
DC Output	Powered.

Dual Input Power Distribution Module (PDS8CB):

Input

Voltage	24VDC from eFlow104NB and 12VDC from VR6
Input PTCs	9A

Outputs

Voltage	12VDC and/or 24VDC
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output PTCs	2.5A

Indicators (LED)

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

Voltage Regulator (VR6):

Input	
Voltage	24VDC from eFlow104NB
Output	
Voltage	12VDC
Current	6A continuous
Other	Surge suppression
Indicators (LED)	
Input	24VDC is present
Output	Powered

Access Power Controller (ACM8CB):

Input	
Voltage	24VDC from eFlow104NB
Input Fuse	10A/250V
Outputs	
Voltage	24VDC
Eight (8) independently controlled PTC outputs:	
a) Fail-Safe and/or Fail-Secure power outputs.	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above.	
Output PTCs	2.5A
Indicators (LED)	
Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T2VK7F8D Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE	European Conformity
----	---------------------


Physical and Environmental:

Dimensions (H x W x D)	
Enclosure:	27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:	32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)
Weight (approx.)	
Product:	47 lb. (21.3 kg)
Shipping:	51.35 lb. (23.3 kg)
Temperature	
Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)
Relative Humidity	85% +/- 5%
BTU/Hr. (approx.):	145 BTU/Hr.

Access Controller Position Chart for the Following Models:

Altronix / HID Aero/VertX	Pem Mounting
ACM4, ACM4CB, ACM8, ACM8CB, ACMS8, ACMS8CB, ACMS12, ACMS12CB, LINQ8ACM, LINQ8ACMCB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, PDS16, PDS16CB, VR6, GB1 (accommodates Genetec Synergis Cloud Link)	(A)
Aero™: X100, X200, X300, X1100	(B)
Aero™: X100, X200, X300, X1100 (without case on TV2 only)	(C)

TMV2 Door Backplane (Order Separately)

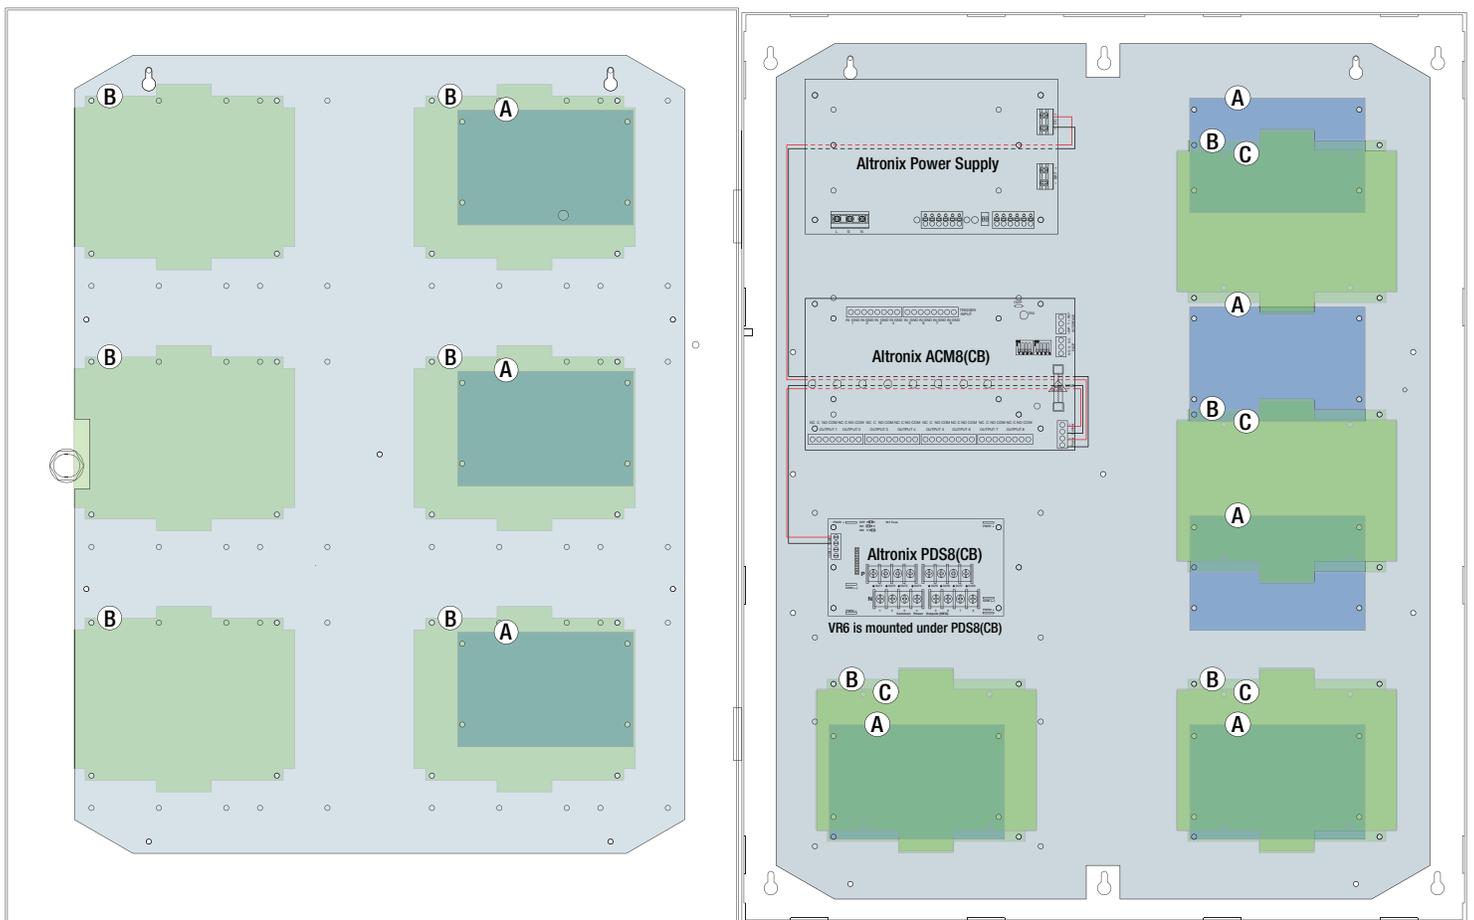

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC with batteries



Trove2BWC with wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

