Rev. 04212023

T3BV77F16SD (Kit)

Access and Power Integration Solution for Brivo

T3BV77F16SD kit consists of Trove3 enclosure and TBV3 Brivo/Altronix backplane with two (2) 24VDC @ 10A power supply/chargers, two (2) 12VDC voltage regulators, two (2) eight (8) PTC protected dual input/output access control modules and two (2) eight (8) PTC protected dual input/output power distribution modules. This kit also accommodates various combinations of Brivo boards for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

T3BV77F16SD

Brivo boards are not included

Key Features

- 24VDC power supply/chargers
- Accommodates following Brivo boards:
  - One (1) ACS6000-MBE
  - Twelve (12) ACS6100-DB or ACS6100-I/O
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Two (2) double knockout 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
  - Thirteen (13) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
    - UL: UL294 - Access Control System
    - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

T3BV77F16SD (Kit)

Access and Power Integration Solution for Brivo

Altronix TROVE

Specifications

Two (2) Power Supplies (eFlow104NB):

Input
- Voltage: 120VAC, 60Hz, 4.5A max.
- Input Fuse: 6.3A/250V

Outputs
- Voltage: 24VDC @ 10A
- Auxiliary: 1A (unswitched)
- Protection: Overvoltage protection. Filtered and regulated

Battery Charging
- Capacity: 12VDC/12AH (4 within enclosure)
  40AH/65AH (requires separate enclosure)
- Type: Sealed lead acid or gel type
- Failover: Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect
- Supervised: Latching or non-latching
- EOL: 10K Resistor

Supervision
- AC Failure: Form "C" contacts
- Battery: Form "C" contacts
- Low DC Power Shutdown
  Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)
  Prevents deep battery discharge.

Indicators (LED)
- AC Input: 120VAC is present
- DC Output: Powered
- Battery: Discharged or not connected

Two (2) Dual Input Access Power Controllers (ACMS8CB):

Input
- Voltage: 24VDC from eFlow104NB
- Input PTCs: 9A

Outputs
- Voltage: 12 or 24VDC individually selectable

Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) indepently controlled Form "C" relay outputs:
a) Fail-Safe and/or Fail-Secure power outputs
b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated
c) Auxiliary power outputs (unswitched)
d) Any combination of the above

Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2
Individual outputs may be set to OFF position for servicing
- Output PTCs: 2.5A

Indicators (LED)
- Red LEDs: Outputs are triggered (relays energized)
- Blue LED: FACP disconnect is triggered

Individual voltage LEDs:
- Green: 12VDC
- Red: 24VDC

Two (2) Voltage Regulators (VR6):

Input
- Voltage: 24VDC from eFlow104NB

Output
- Voltage: 12VDC
- Current: 6A continuous
- Other: Surge suppression

Indicators (LED)
- Input: 24VDC is present
- Output: Powered

Two (2) Dual Input Power Distribution Modules (PDS8CB):

Input
- Voltage: 12VDC and 24VDC from ACMS8CB
- Input PTCs: 9A

Outputs
- Voltage: 12VDC and/or 24VDC

Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2
Individual outputs may be set to OFF position for servicing
- Output PTCs: 2.5A

Indicators (LED)
- DC Output: Eight (8) individual output LEDs
  - Green: 12VDC
  - Red: 24VDC

T3BV77F16SD Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies
Please refer to the corresponding Sub-Assembly Installation Guides for further information
- CE: European Conformity

Physical and Environmental

Dimensions (H x W x D)
- Enclosure:
  36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
- Shipping:
  40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)
- Product: 84.2 lb. (38.2 kg)
- Shipping: 97.5 lb. (44.22 kg)

Temperature
- Operating: 0ºC to 49ºC (32ºF to 120ºF)
- Storage: – 20ºC to 70ºC (– 4ºF to 158ºF)

Relative Humidity 85% +/– 5%
BTU/Hr. (approx.): 217 BTU/Hr.

T3BV77F16SD (Kit)

Access and Power Integration Solution for Brivo

Access Controller Position Chart for the Following Models:

Altronix / Brivo	Pem Mounting
ACS6000-MBE	A
ACS6100-DB, ACS6100-I/O	B

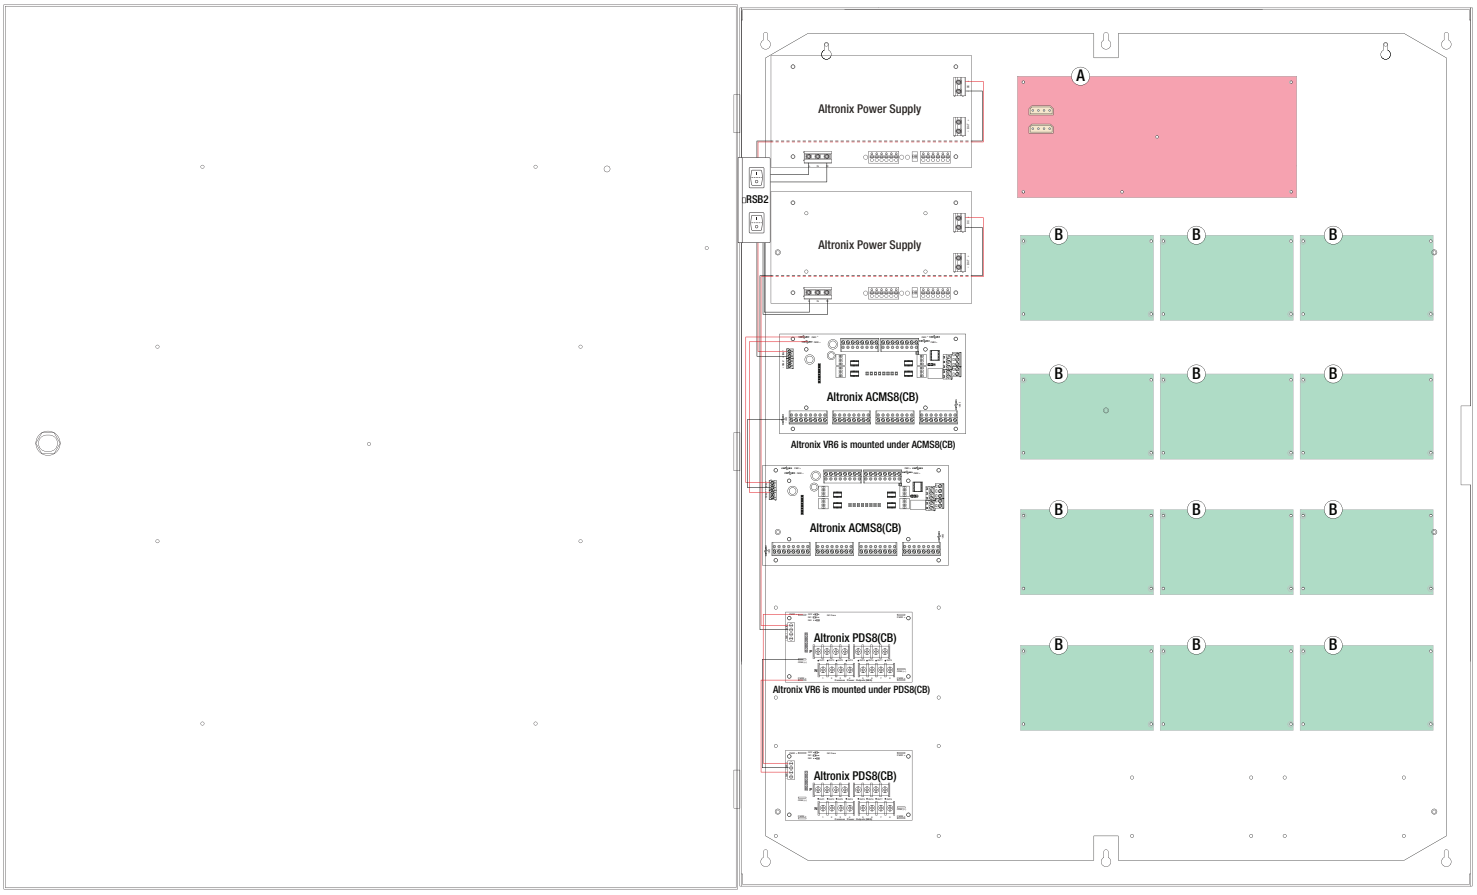

T3BV77F16SD (Kit)

Access and Power Integration Solution for Brivo

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

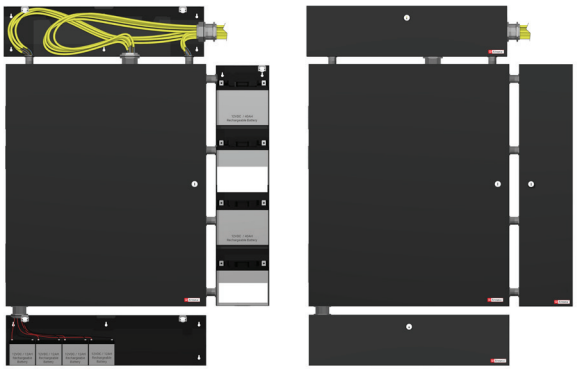

Typical battery/wiring setup with Trove3 Enclosure (not included)

TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets.Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

T3BV77F16SD (Kit)

Access and Power Integration Solution for Brivo

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12” x 30.12” x 7.06” (917.5mm x 768.1mm x 179.3mm)

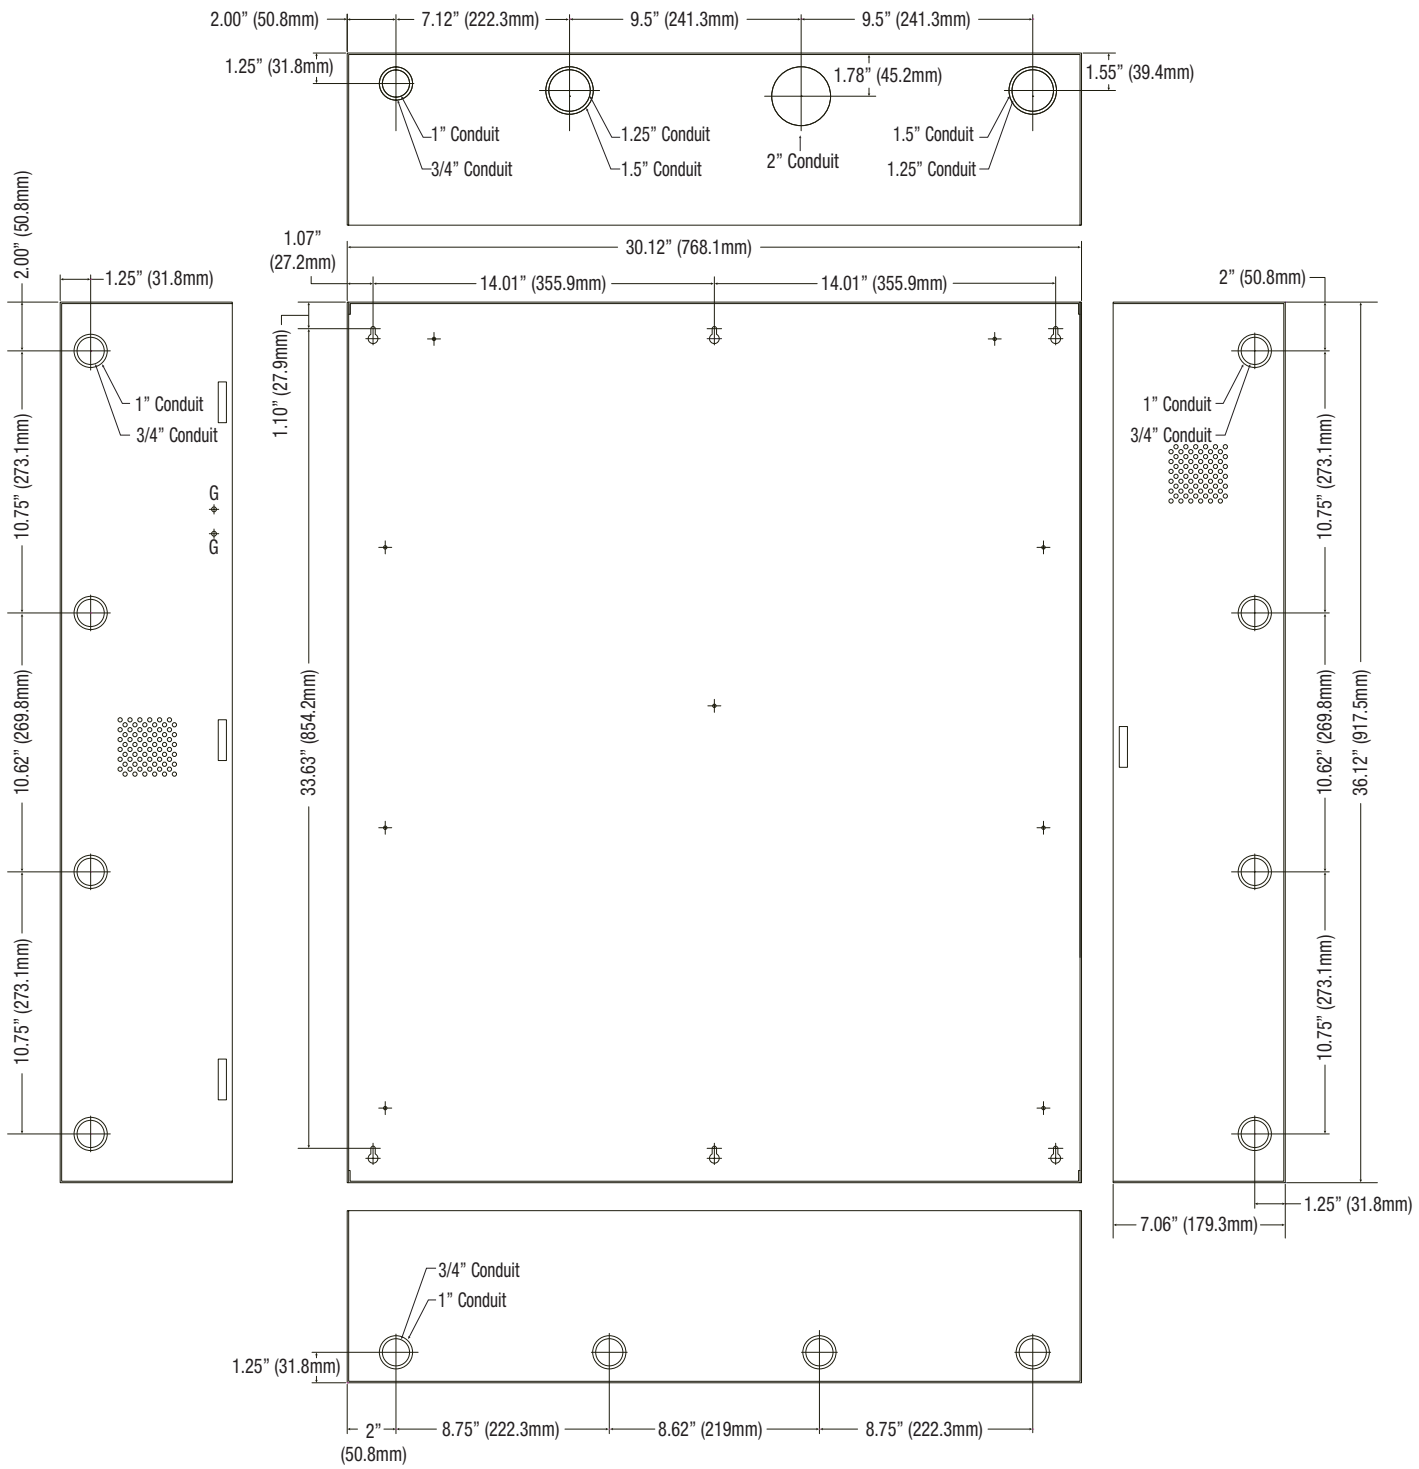

Brivo Inc | 7700 Old Georgetown Rd #300 | Bethesda, MD 20814 USA
phone: +1 866.692.7486 | email: customercare@brivo.com | www.brivo.com