Altronix®

Rev. 07222023

T3M77LCK3D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Altronix T3M77LCK3D is a 16-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T3M77LCK3D accommodates eight (8) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt

Mercury

T3M77LCK3D - includes (2) AL1024ULXB2, (2) ACMS8CB, (2) VR6, (2) PDS8CB, wire harnesses and management

Mercury boards are not included

Key Features

- Accommodates the following Mercury controllers:
  8 - MR52
- Convenient knockout configuration:
  - One (1) single knockout - 2” Conduit
  - Two (2) double knockout - 1.25” Conduit and 1.5” Conduit
  - Thirteen (13) double knockouts - 3/4” Conduit and 1” Conduit
- Unit includes:
  - Removable backplane
  - Wire management
  - Custom Wire Harnesses for power distribution and controller connections
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
  - UL: UL294 - Access Control System
  - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T3M77LCK3D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Specifications

Two (2) Power Supplies (AL1024ULXB2):

Input

Voltage	115VAC 60Hz, 8.4A max.
Input Fuse	5A/250V

Outputs

Voltage	24VDC
Current	10A @ 24VDC continuous max
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Batteries are sold separately

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Two (2) Dual Input Access Power Controllers (ACMS8CB):

Input

Voltage	24VDC from AL1024ULXB2 and 12VDC from VR6
Input PTCs	9A

Outputs

Voltage	12 or 24VDC individually selectable

Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) indepently controlled Form "C" relay outputs:

a) Fail-Safe and/or Fail-Secure power outputs
b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated
c) Auxiliary power outputs (unswitched)
d) Any combination of the above

Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs	2.5A

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Blue LED	FACP disconnect is triggered
Individual voltage LEDs:	
Green:	12VDC
Red:	24VDC

Two (2) Voltage Regulators (VR6):

Input

Voltage	24VDC from AL1024ULXB2

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Two (2) Dual Input Power Distribution Modules (PDS8CB):

Input

Voltage	24VDC from AL1024ULXB2 and 12VDC from VR6
Input PTCs	9A

Outputs

Voltage	12VDC and/or 24VDC

Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs	2.5A

Indicators (LED)

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

T3M77LCK3D Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies

Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE	European Conformity

Physical and Environmental:

Dimensions (H x W x D)

Enclosure:
36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
Shipping:
40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product:	85.6 lb. (38.83 kg)
Shipping:	98.8 lb. (44.82 kg)

Temperature

Operating	0ºC to 49ºC (32ºF to 120ºF)
Storage	– 20ºC to 70ºC (– 4ºF to 158ºF)
Relative Humidity	85% +/– 5%
BTU/Hr. (approx.):	289 BTU/Hr.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T3M77LCK3D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

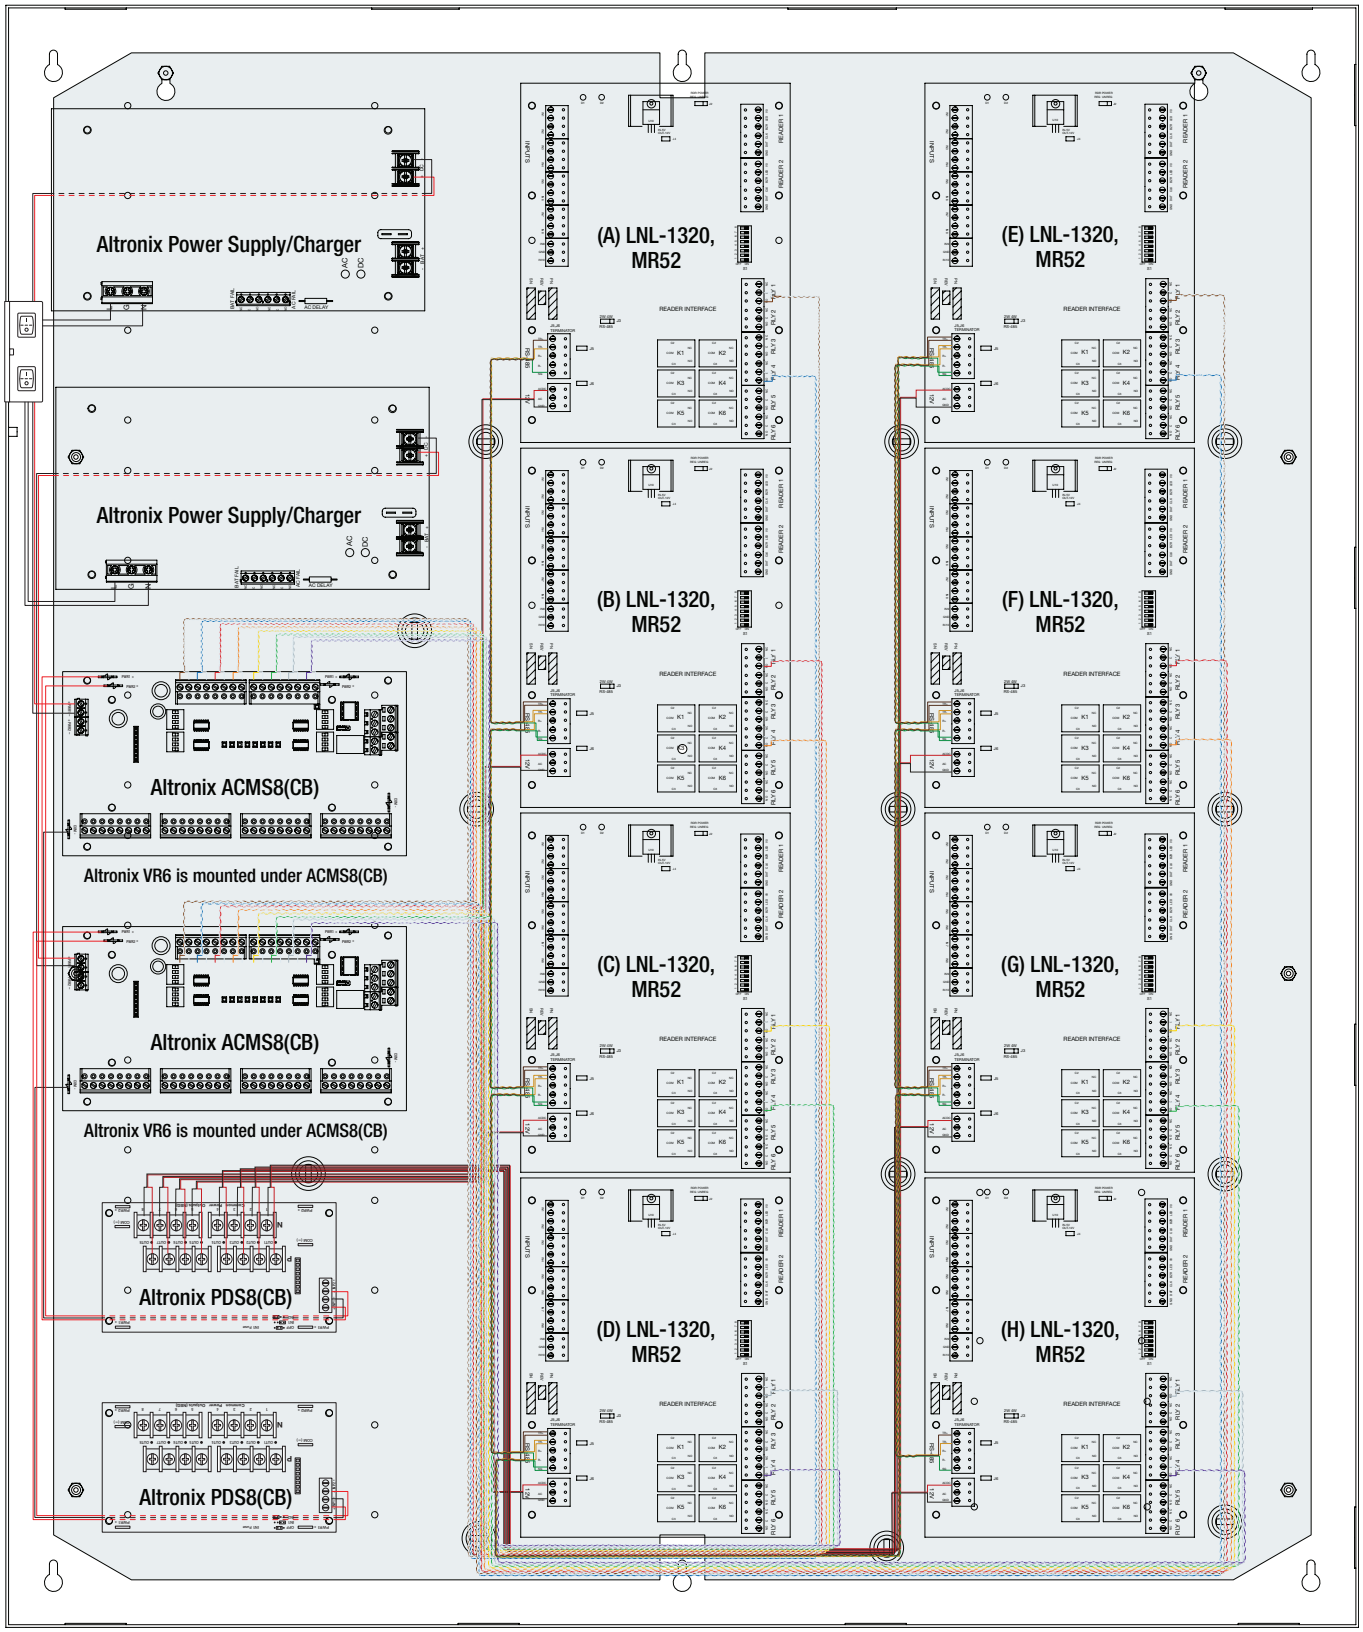

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T3M77LCK3D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

Accessories (order separately)

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

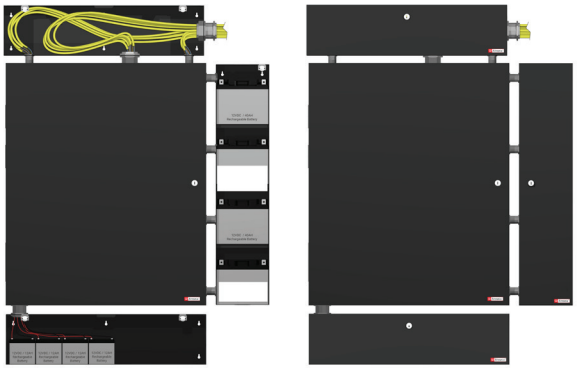

Typical battery/wiring setup with Trove3 Enclosure (not included)

TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets.Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T3M77LCK3D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12” x 30.125” x 7.06” (917.5mm x 768.1mm x 179.3mm)

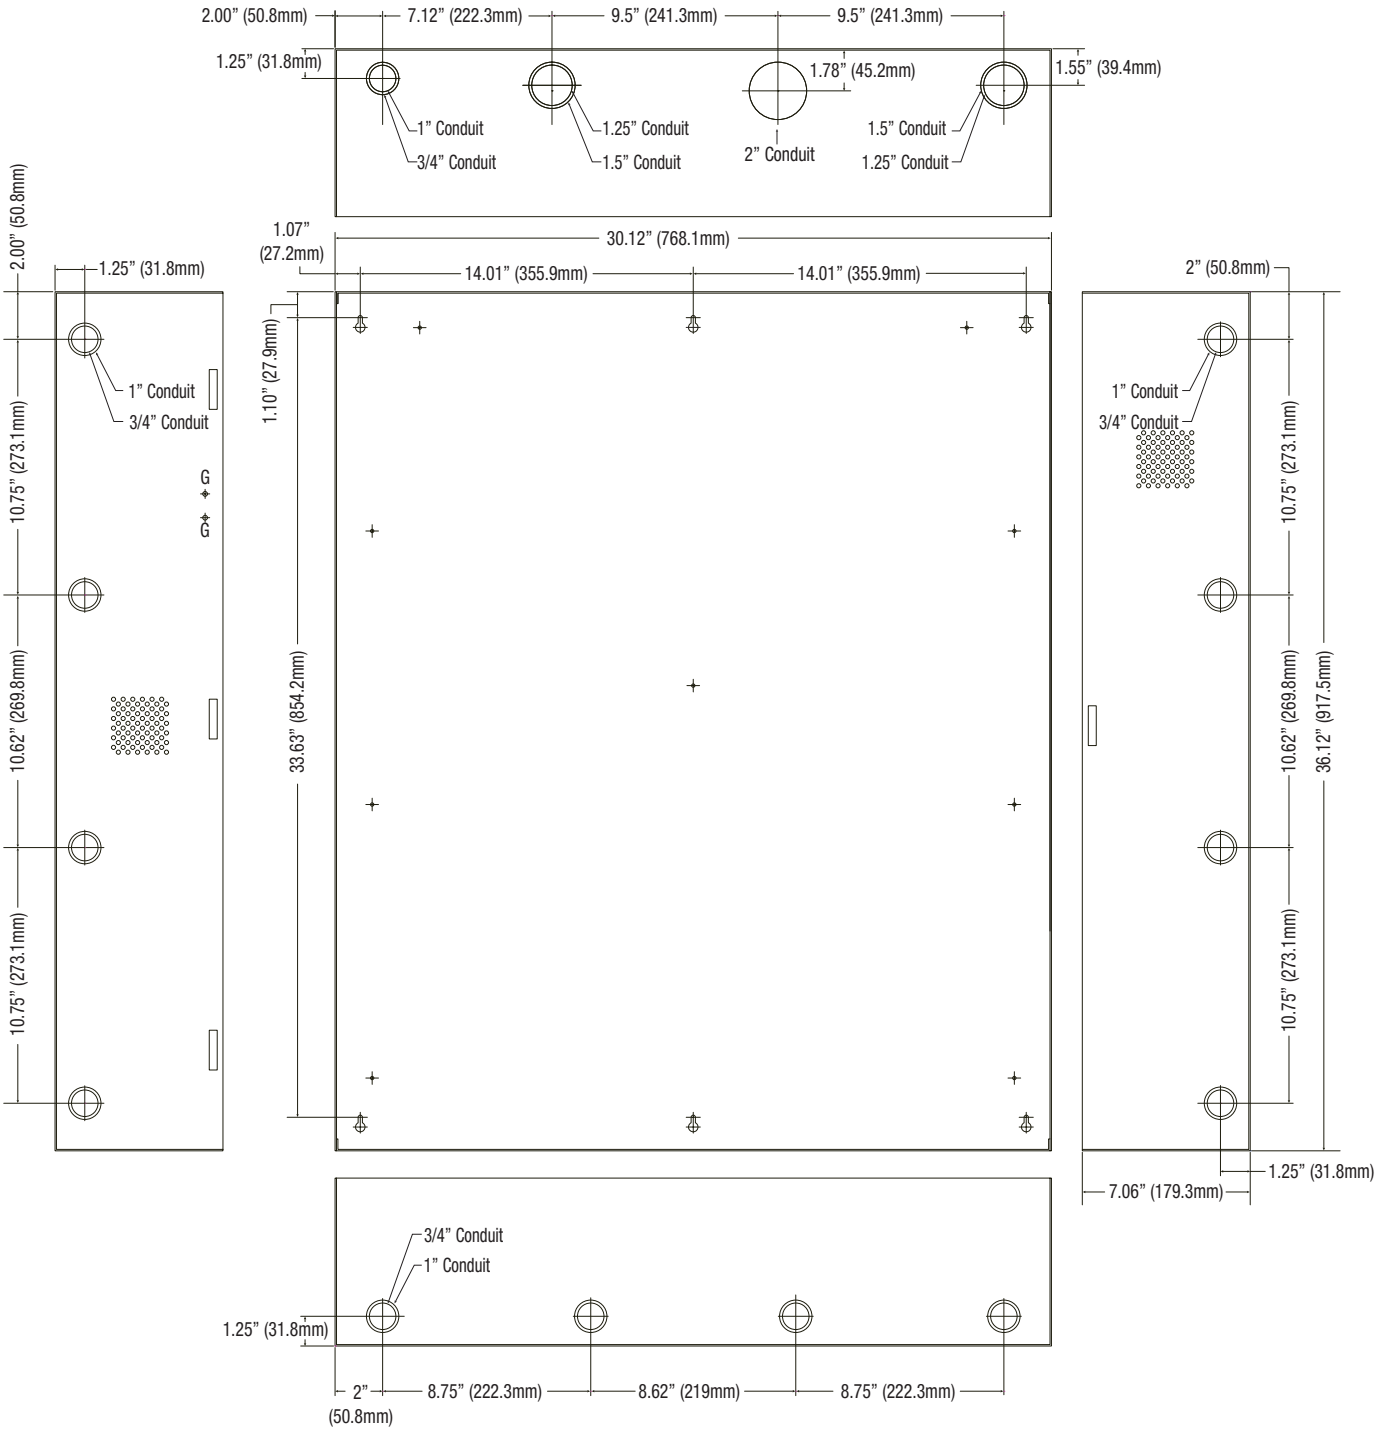

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com