


RB524

Relay Module

Altronix RB524 relay is designed for continuous duty.
This rugged and dependable relay will handle any switching application.

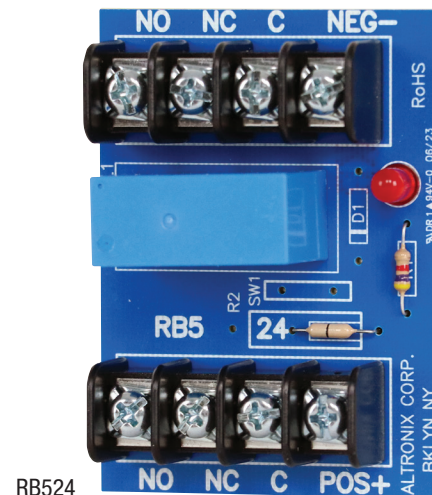

RB524

Specifications

Input

Voltage 24VDC operation

Current Draw 40mA

Contact Rating 5A/220VAC or 28VDC DPDT contacts

Indicators (LED)

Trigger Relay is triggered

Physical and Environmental

Dimensions (L x W x H)

2.75" x 2" x 1" (69.9mm x 50.1mm x 25.4mm)

Weight (approx.)

Product: 0.15 lb. (0.06 kg)

Shipping: 0.25 lb. (0.11 kg)

Temperature

Operating: - 25°C to 55°C (- 13°F to 131°F)

Storage: - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com