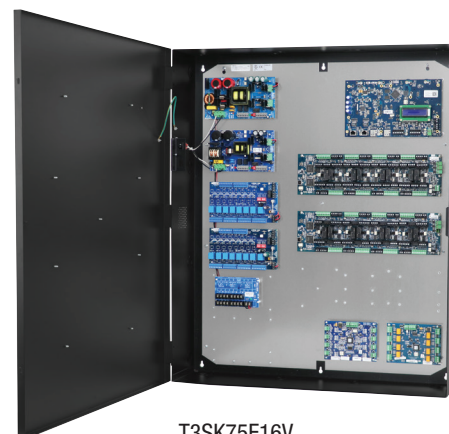


T3SK75F16V (Kit)

Access & Power Integration Solution for Software House

TROVE™

Altronix T3SK75F16V kit consists of Trove3 enclosure and TSH3 Software House/Altronix backplane with 24VDC @ 10A and 12VDC @ 10A power supply/chargers, two eight (8) fuse protected output access control modules and eight (8) fuse protected output power distribution module. This kit also accommodates various combinations of Software House boards for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

SOFTWARE HOUSE

T3SK75F16V

*Software House boards are not included***Key Features**

- 24VDC and 12VDC power supply/chargers
- Accommodates the following Software House controllers:
iStar Ultra GCM, iStar Ultra GCM G2, iStar Ultra ACM and iStar Ultra ACM G2 boards or iSTAR Pro GCM and iSTAR ACM SE/PRO ACM boards, as well as I8, R8, and I8-CSI boards
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Two (2) double knockouts
1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
 - Thirteen (13) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications**Power Supply 1 (eFlow104NBV):****Input**

Voltage 220VAC (working range 198VAC - 256VAC),
50/60Hz, 2.7A

Input Fuse 6.3A/250V

Output

Voltage 24VDC @ 10A

Auxiliary 1A (unswitched)

Protection Overvoltage protection. Filtered and regulated

Power Supply 2 (eFlow102NBV):**Input**

Voltage 220VAC (working range 198VAC - 256VAC),
50/60Hz, 2.1A

Input Fuse 5A/250V

Output

Voltage 12VDC @ 10A

Auxiliary 1A (unswitched)

Protection Overvoltage protection. Filtered and regulated

Both Power Supplies:**Battery Charging**

Capacity 12VDC/12AH (4 within enclosure)
40AH/65AH (requires separate enclosure)

Type Sealed lead acid or gel type

Failover Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect

Supervised Latching or non-latching

EOL 10K Resistor

Supervision

AC Failure Form "C" contacts

Battery Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below
71-73% for 12V units and 70-75% for 24V units (depending on the
power supply). Prevents deep battery discharge

Indicators (LED)

AC Input 220VAC is present

DC Output Powered

Battery Discharged or not connected

Power Distribution Module (PD8UL):**Input**

Voltage 12VDC from eFlow102NBV

Outputs

Voltage 12VDC

Fuses 3.5A/250V

Indicators (LED)

Green LED DC Output

Two (2) Access Power Controllers (ACM8):**Input**

Voltage 24VDC from eFlow104NBV

Input Fuse 10A/250V

Outputs

Voltage 24VDC

Eight (8) 24VDC independently controlled fused outputs:

- a) Fail-Safe and/or Fail-Secure power outputs
Form "C" Relays rated 28VAC or VDC @ 2.5A
- b) Auxiliary power outputs (unswitched)
- c) Any combination of the above

Output Fuses 3.5A/250V

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)

Green LED FACP disconnect is triggered

T3SK75F16V Kit:**Agency Listings**

CE European Conformity

Physical and Environmental**Dimensions (H x W x D)****Enclosure:**

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

Shipping:

40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product 84.2 lb. (38.2 kg)

Shipping 97.5 lb. (44.22 kg)

Temperature

Operating 0°C to 49°C (32°F to 120°F)


Storage - 20°C to 70°C (- 4°F to 158°F)


Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 217 BTU/Hr.

Access Controller Position Chart for the Following Models:

Software House	Pem Mounting
iStar Ultra GCM	(A)
iStar Pro ACM, iSTAR ACM SE	(B)
iStar Ultra ACM	(C)
I8, R8 or I8-CSI	(D)

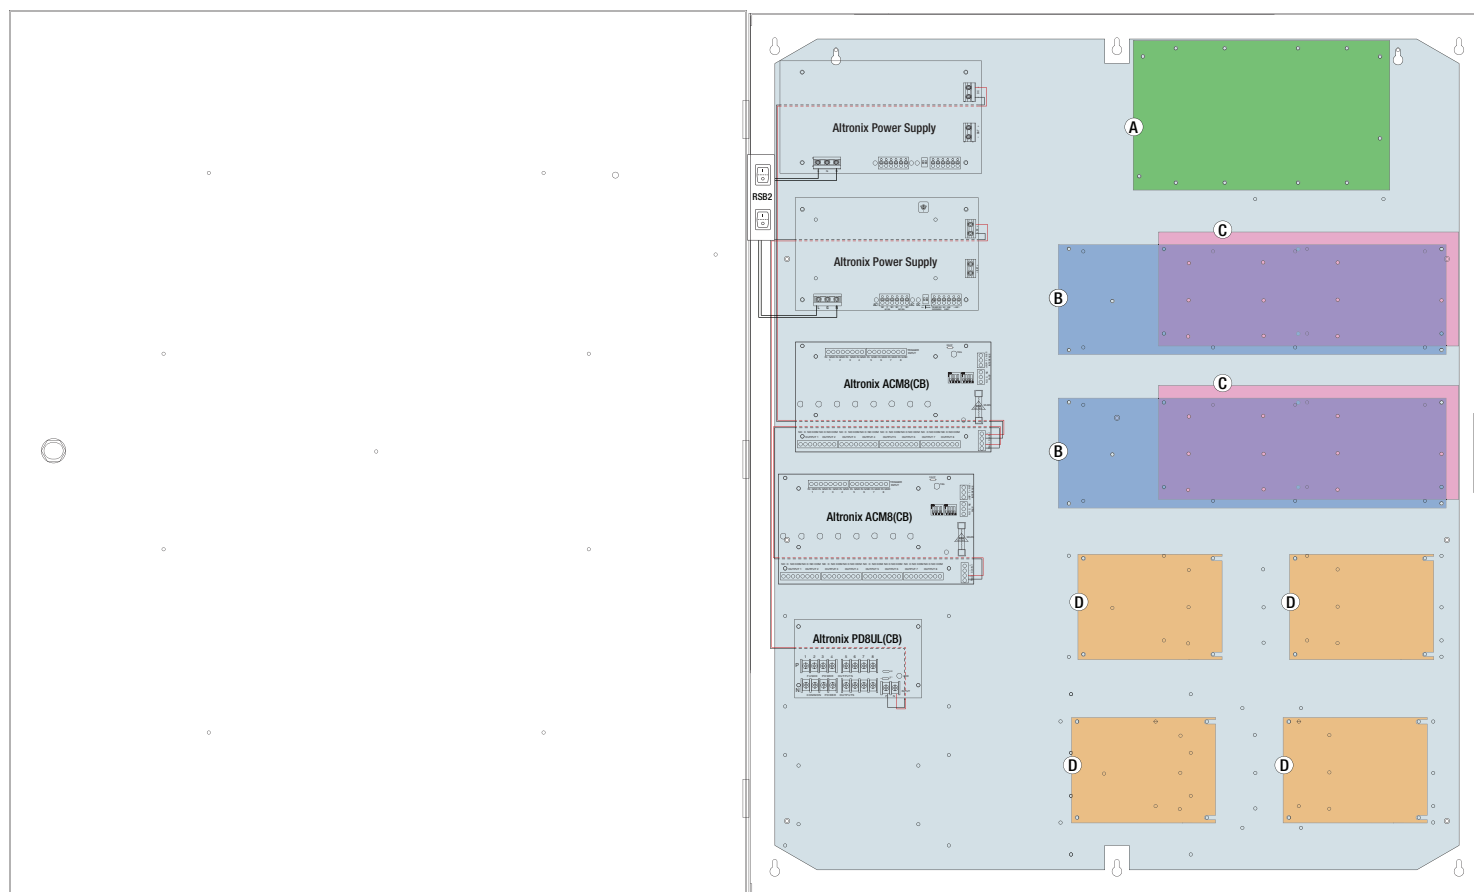

Accessories (order separately)

LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

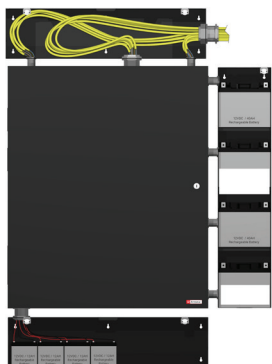**TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure**

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Typical battery/wiring setup with Trove3 Enclosure (not included)

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

