

SMP10WP12

Outdoor DC Power Supply/Charger

Altronix SMP10WP12 DC Outdoor Power Supply/Charger provides 12VDC and is designed to be conveniently located where power is required. 16 GA steel enclosure finished with heat fused polyester powder is NEMA 4/4X, IP66-11 Rated for outdoor use. It features turn lock and integral flanges to simplify wall or pole mounting.



SMP10WP12

Specifications**Input**

Voltage 115VAC, 60Hz, 1.9A

Outputs

Voltage 12VDC

Current 10A continuous supply current

Other Short circuit and thermal overload protection
Filtered and regulated

Battery Charging

Type Sealed lead acid or gel type

Failover Upon AC loss, instantaneous

Batteries are sold separately

Separate ventilated enclosure is required

Indicators (LED)

Input Input voltage is present

DC Output Powered

Agency Listings

CE

European Conformity

Physical and Environmental**Dimensions (H x W x D)**

12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)

Product Weight 9.9 lb. (4.5 kg)

Shipping Weight 11 lb. (5.0 kg)


Temperature

Operating – 40°C to 60°C (– 40°F to 140°F)

Storage – 40°C to 70°C (– 40°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr. (approx.): 62 BTU/Hr.

Accessories (order separately)

PMK1

**PMK1 -
Pole Mount Kit**

PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8" (diameter) poles.

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

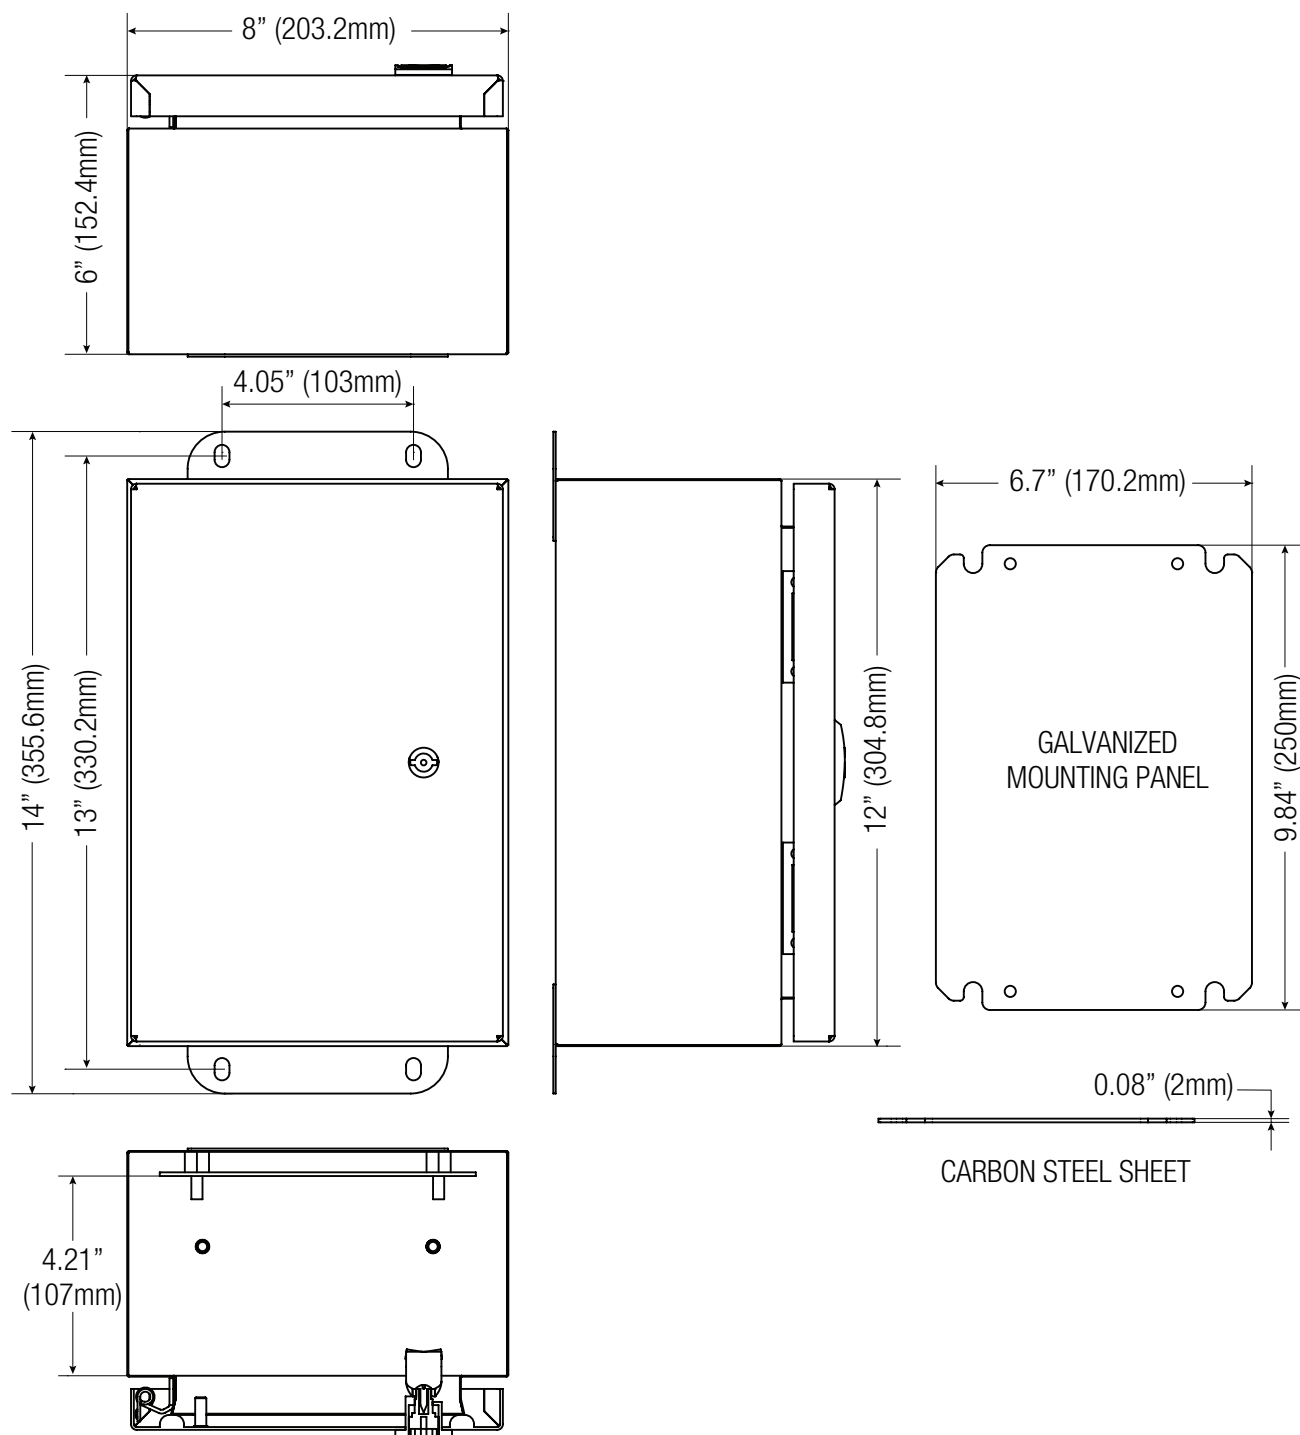
SMP10WP12

Outdoor DC Power Supply/Charger

Dimensions and Drawing

Dimensions (H x W x D approximate)

12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)

**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com