

T3SK77724SDV (Kit)

Access & Power Integration Solution for Software House

TROVE™

Altronix T3SK77724SDV kit consists of Trove3 enclosure and TSH3 Software House/ Altronix backplane with three (3) 24VDC @ 10A power supply/chargers, two (2) twelve (12) PTC protected dual output access control modules, two (2) 12VDC 6A voltage regulators and two (2) sixteen (16) PTC protected dual output power distribution modules. This kit also accommodates various combinations of Software House boards for up to twenty-four (24) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

SOFTWARE HOUSE

T3SK77724SDV

*Software House boards are not included***Key Features**

- 24VDC power supply/charger
- Accommodates the following Software House controllers:
iStar Ultra GCM and iStar Ultra ACM boards or
iSTAR Pro GCM and iSTAR ACM SE/PRO ACM boards,
as well as I8, R8, and I8-CSI boards
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Two (2) double knockouts
1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
 - Thirteen (13) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- CE European Conformity.
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications**Three (3) Power Supplies (AL1024XB2V):****Input**

Voltage 220VAC (working range 198VAC-256VAC),
50/60Hz, 2.5A

Input Fuse 5A/250V

Output

Voltage 24VDC

Current 10A @ 24VDC continuous max.

Other Overvoltage protection. Filtered and regulated

Battery Charging

Capacity 12VDC/12AH (2 within enclosure)
40AH/65AH (requires separate enclosure)

Type Sealed lead acid or gel type

Failover Upon AC loss, instantaneous

Batteries are sold separately

Supervision

AC Failure Form "C" contacts

Battery Form "C" contacts

Indicators (LED)

Input 220VAC is present

DC Output Powered

Battery Discharged or not connected

Two (2) Dual Input Access Power Controllers (ACMS12CB):**Input**

Voltage 24VDC from AL1024XB2V and
12VDC from VR6

Input PTCs 9A

Outputs

Voltage 12VDC and/or 24VDC

Twelve (12) independently controlled PTC outputs

a) Fail-Safe and/or Fail-Secure power outputs

Form "C" Relays rated 28VAC or VDC @ 2.5A

b) Auxiliary power outputs (unswitched)

c) Any combination of the above

Output PTCs 2.5A

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)

Green LED FACP disconnect is triggered

Two (2) Voltage Regulators (VR6):**Input**

Voltage 24VDC from AL1024XB2V

Output

Voltage 12VDC

Current 6A continuous

Other Surge suppression

Indicators (LED)

Input 24VDC is present

Output Powered

Two (2) Dual Input Power Distribution Modules (PDS16CB):**Input**

Voltage 24VDC from AL1024XB2V and
12VDC from VR6

Input PTCs 9A

Outputs

Voltage 12VDC and/or 24VDC

Any of the sixteen (16) power outputs are selectable

to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs 2.5A

Indicators (LED)

DC Output Sixteen (16) individual output LEDs

Green: 12VDC

Red: 24VDC

T3SK77724SDV Kit:**Agency Listings**

CE European Conformity

Physical and Environmental**Dimensions (H x W x D)**

Enclosure:

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

Shipping:

40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product 87.2 lb. (39.6 kg)

Shipping 100.5 lb. (45.6 kg)

Temperature

Operating 0°C to 49°C (32°F to 120°F)


Storage - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 327 BTU/Hr.

Access Controller Position Chart for the Following Models:

Software House	Pem Mounting
iStar Pro GCM	(A)
iStar Ultra GCM	(B)
iStar Pro ACM, iSTAR ACM SE	(C)
iStar Ultra ACM	(D)
I8, R8 or I8-CSI	(E)

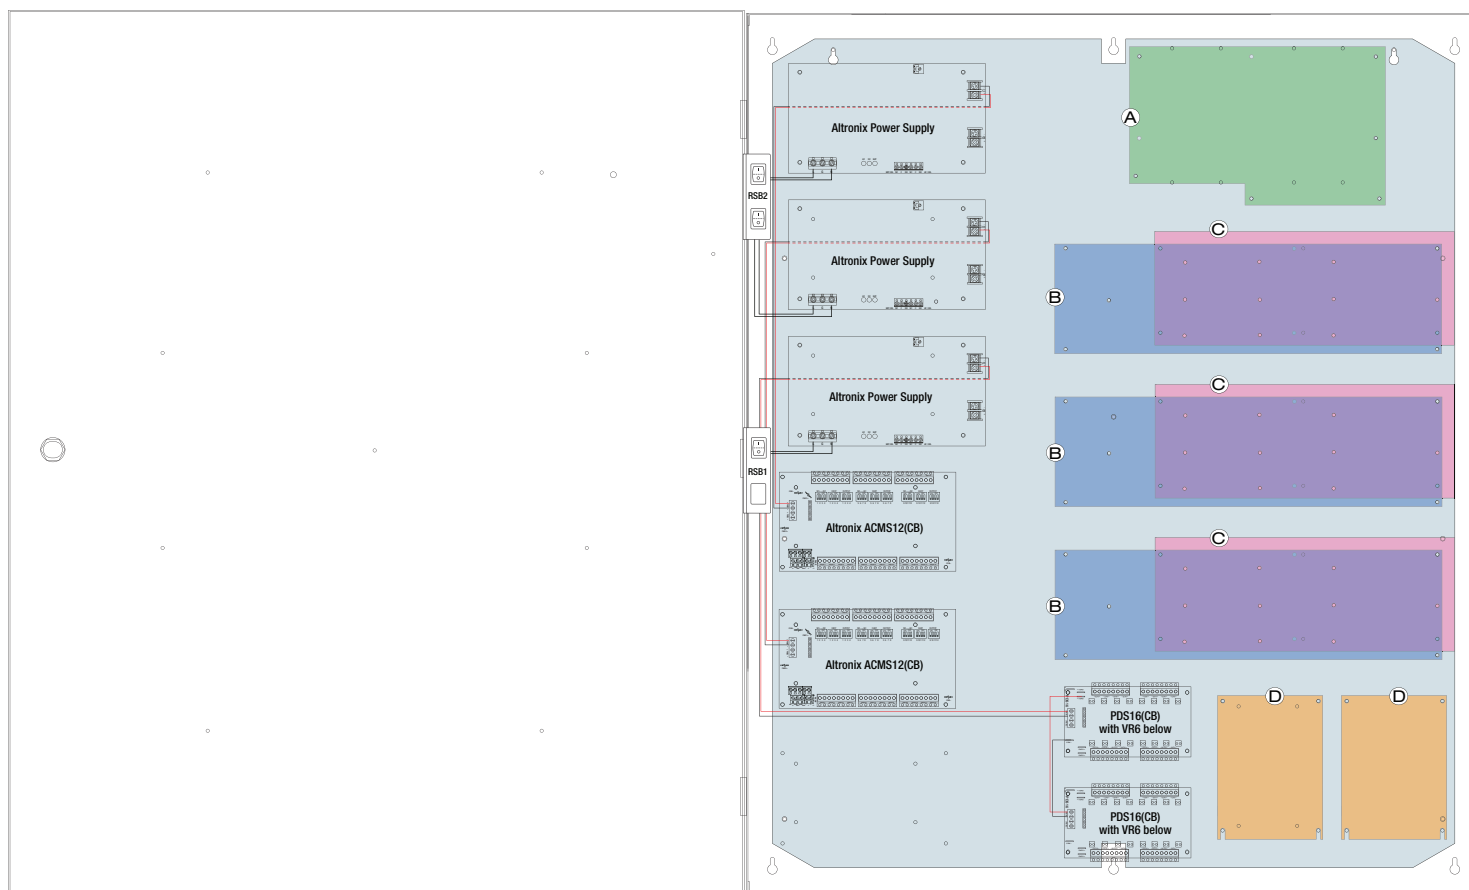

Accessories (order separately)

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

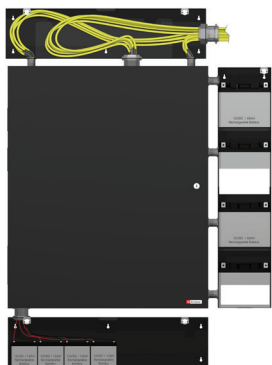**TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure**

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Typical battery/wiring setup with Trove3 Enclosure (not included)

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

