

# SMP3ET

## Power Supply/Charger Kit

Altronix SMP3ET power supply/charger converts a low voltage AC input into a 6VDC or 12VDC output. This unit has a wide range of applications for access control, security and CCTV system accessories that require additional power.



SMP3ET

### Specifications

#### Input

Voltage 16VAC from TP1640 plug-in transformer

#### Outputs

Voltage 6VDC or 12VDC selectable

Current 2.5A continuous max.

Other Short circuit and thermal overload protection  
Filtered and regulated

#### Battery Charging

Capacity One (1) 12VDC/7AH or two (2) 12VDC/4AH batteries within enclosure

Type Sealed lead acid or gel type

Failover Upon AC loss, instantaneous

Batteries are sold separately

#### Indicators (LED)

Input Input voltage is present

DC Output Powered

### Physical and Environmental

#### Dimensions (H x W x D)

Enclosure:

8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)

Shipping:

13" x 10" x 7" (330.2mm x 254mm x 177.8mm)

#### Weight (approx.)

Product Weight: 3.3 lb. (1.5 kg)

Shipping Weight: 3.8 lb. (1.72 kg)

#### Temperature

Operating: 0°C to 49°C (32°F to 120°F)

Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

#### BTU/Hr. (approx.):

6VDC: 8 BTU/Hr.

12VDC: 15 BTU/Hr.

### Lifetime Warranty


# SMP3ET

Power Supply/Charger Kit

## Dimensions and Drawing

Dimensions (H x W x D approximate)

8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)

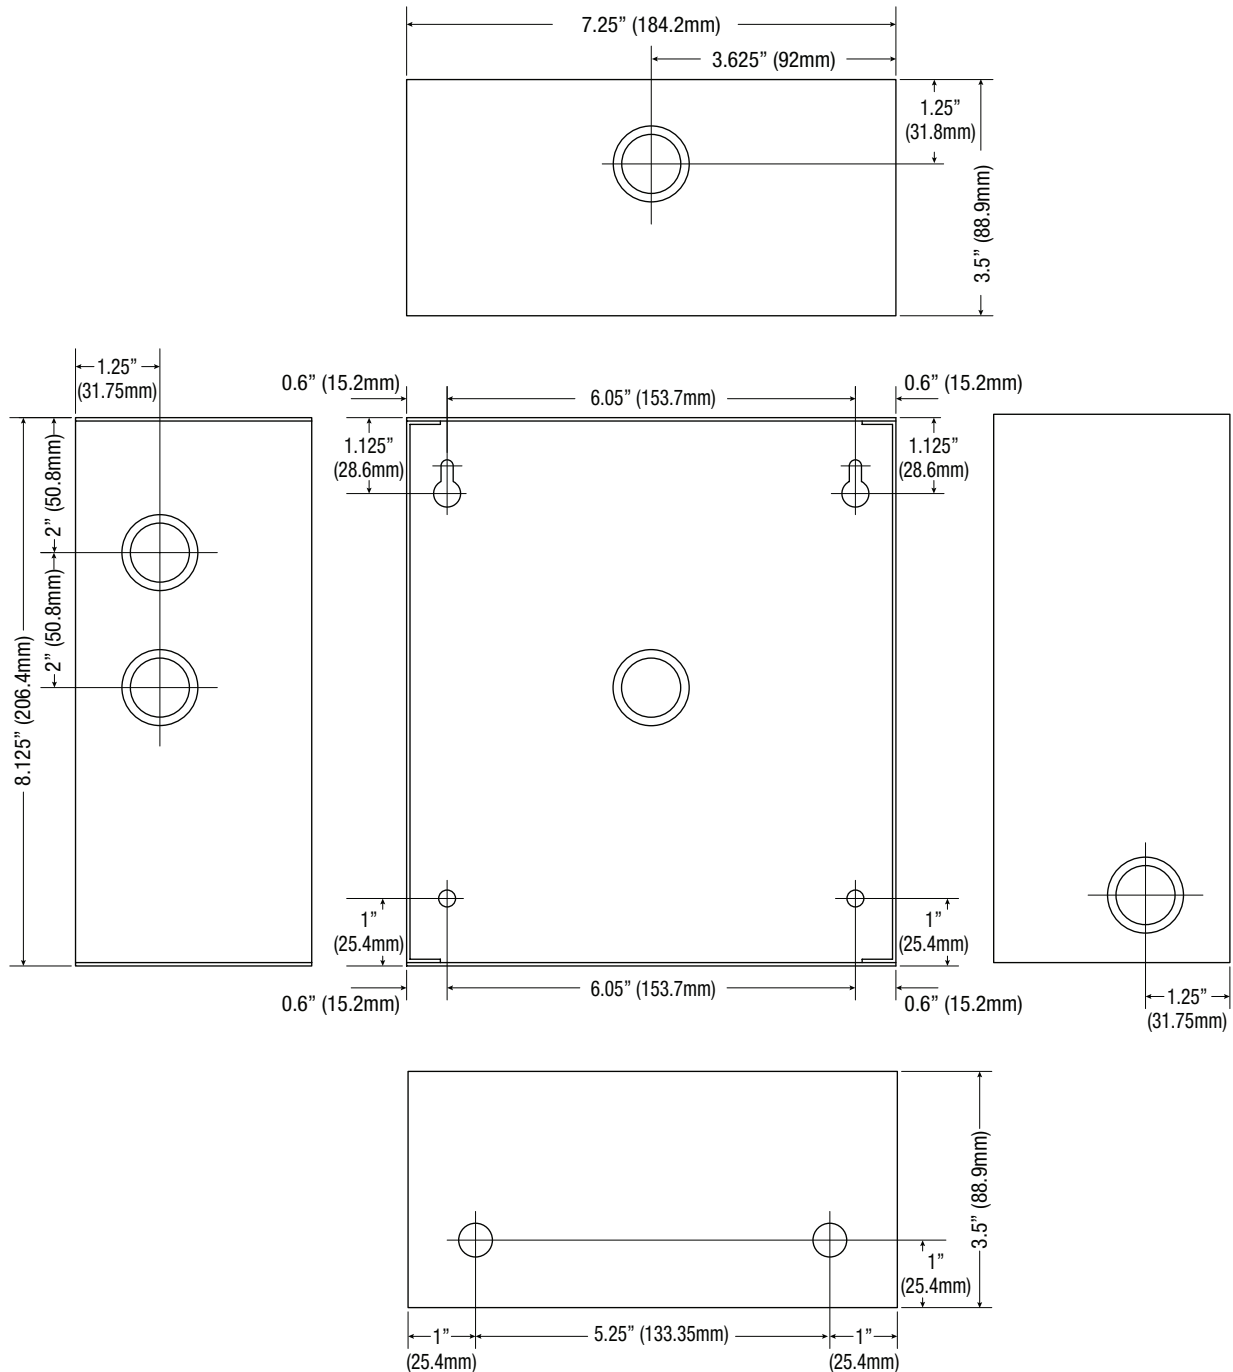

### Lifetime Warranty