

Trove1PH1 (Enclosure & Backplane) / TC1 (Backplane)

Access and Power Integration Solutions



Altronix Trove1HC1 consists of a high-capacity enclosure with removable backplane. This unit easily combines Altronix power/accessories with various combinations of Openpath boards in a streamlined package. Trove simplifies board layout and wire management, reducing installation time and labor costs.



Trove1PH1

* Boards not included



Trove1PH1 (Trove1 Enclosure + TC1 Backplane) Features

- Accommodates the following Openpath controllers with or without Altronix power/accessories:
 - Openpath one (1) OP-ACC, OP16EM, and one (1) OP-EX-4E or OP-X-8E
 - Altronix Power Supply
 - Altronix Sub-Assemblies

Agency Listings

UL:

UL294 - Access Control System.

cUL:

CAN/ULC - s319-05 - Electronic Access Control Systems.

CE

European Conformity

Features

- Simplifies board layout and wire management
- Convenient knockout configuration:
 - One (1) double knockout
1.948" (1-1/2" Conduit) / 1.701" (1-1/4" Conduit).

Features (cont'd)

- Nine (9) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit).
- Accommodates up to two (2) 12VDC/7AH batteries
- 16 AWG powder coated steel
- Includes cam lock, tamper switch and mounting hardware

Trove1PH1 - Dimensions (H x W x D):

18.0" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

Trove1PH1 - Weights:

Product - 15.15 lb. (6.87 kg)
Shipping - 19.05 lb. (8.64 kg)

TC1 - Dimensions (H x W x D):


16.625" x 12.5" x 0.06" (422.3mm x 317.5mm x 1.5mm)

TC1 - Weights:

Product - 3.35 lb. (1.52 kg)
Shipping - 4.0 lb. (1.81 kg)

Access Controller Position Chart for the Following Models:

Altronix / OpenPath	Pem Mounting
AL400ULXB2, AL400ULXB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, AL1024ULXB2, AL1024XB2V, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV, eFlow104NB, eFlow104NBV, Tango1B	(A)
ACM4, ACM4CB, ACMS8, ACMS8CB, LINQ8ACM, LINQ8ACMCB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, VR6	(B)
OP-ACC	(C)
OP-EX-4E	(D)
OP-EX-8E	(E)
OP-16EM	(F)

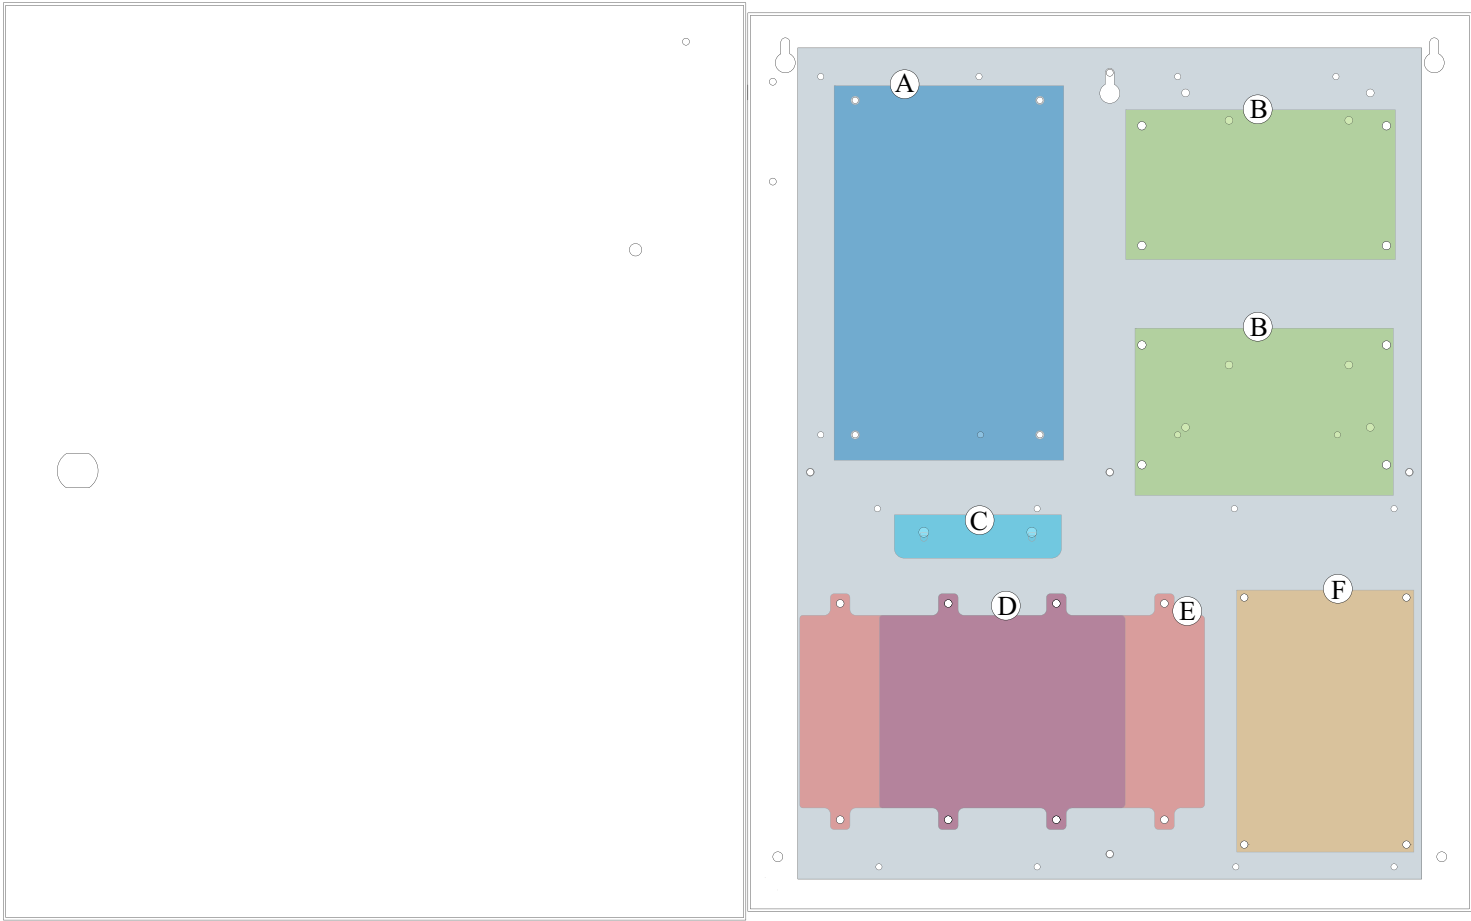

Trove1PH1

Access and Power Integration Solution for Openpath

