

## T1DMK34 (Kit)

### Access & Power Integration Solution for DMP



Altronix T1DMK34 kit consists of Trove1 enclosure, TDM1 DMP/Altronix backplane with one (1) 12 or 24VDC @ 6A power supply/charger, one (1) voltage regulator and one (1) dual input fused power distribution module. This kit also accommodates up to four (4) DMP 734/734N Wiegand modules for up to four (4) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T1DMK34

*DMP modules are not included*

### Key Features

- 12 or 24VDC power supply/charger
- Accommodates up to four (4) DMP 734/734N Wiegand modules
- Convenient knockout configuration:
  - One (1) single knockout  
1.948" (1-1/2" Conduit).
  - Nine (9) double knockouts  
1.362" (1" Conduit) / 1.115" (3/4" Conduit).
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
  - UL: UL294 - Access Control System
  - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to two (2) 12VDC/7AH batteries
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

### Accessories (order separately)



WM5

#### WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

#### MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

**Specifications****Power Supply/Charger (AL600ULXB):****Input**

Voltage	115VAC, 60Hz, 3.5A max.
Input Fuse	5A/250V

**Output**

Voltage	12VDC or 24VDC selectable
Current	6A @ 12VDC or 24VDC continuous max.
Other	Overvoltage protection. Filtered and regulated

**Battery Charging**

Capacity	7AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

**Supervision**

AC Failure	Form "C" contacts
Battery	Form "C" contacts

**Indicators (LED)**

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

**Dual Input Power Distribution Module (PDS8):****Input**

Voltage	24VDC from AL600ULXB and 12VDC from VR6
Input Fuses	10A/32V

**Outputs**

Voltage	12VDC and/or 24VDC
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output Fuses	3A/32V

**Indicators (LED)**

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

**Voltage Regulator (VR6):****Input**

Voltage	24VDC from AL600ULXB
---------	----------------------

**Output**

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

**Indicators (LED)**

Input	24VDC is present
Output	Powered

**T1DMK34 Kit:****Agency Listings**

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE	European Conformity
----	---------------------

**Physical and Environmental****Dimensions (H x W x D)**

Enclosure:	18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)
Shipping:	21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

**Weight (approx.)**

Product	15.5 lb. (7.0 kg)
Shipping	19.5 lb. (8.9 kg)

**Temperature**


Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)

**Relative Humidity**

	85% +/- 5%
BTU/Hr (approx.):	12VDC: 40 BTU/Hr. 24VDC: 77 BTU/Hr.

**Access Controller Position Chart for the Following Models:**

DMP	Pem Mounting
734, 734N	(A)

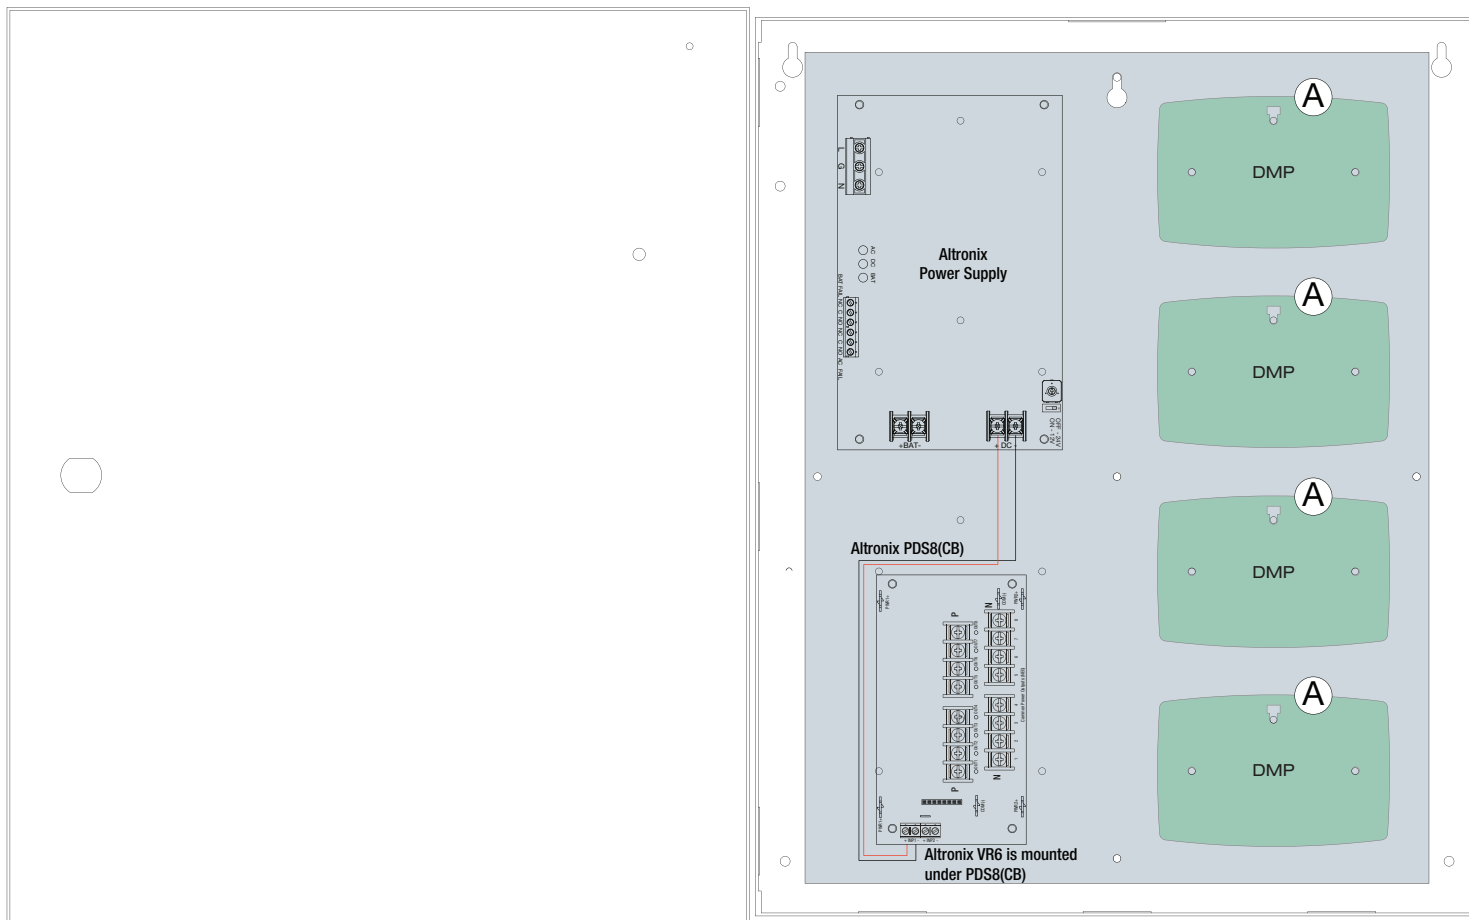

## T1DMK34 (Kit)

## Access & Power Integration Solution for DMP



## Dimensions and Drawing

Dimensions (H x W x D approximate)

18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)

