Altronix®

Rev. 08022022

# T1RAL3316D

## Rack Access and Power Integration Solution

TROVE™

Altronix T1RAL3316D Trove™ Rack kit is pre-assembled and consists Trove1R enclosure and TAL1R Altronix backplane with two (2) 12VDC or 24VDC @ 6A power supply/chargers and two (2) eight (8) output PTC dual output access control modules. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T1RAL3316D

## Key Features

- Output Power:
  - Sixteen (16) individully selectable 12VDC or 24VDC PTC lock power outputs rated at 12A total max.
    - Fire Alarm Disconnect is individually selectable by output
- Power status LED on front panel
- Includes cam lock, tamper switch and mounting hardware
- Simplified board layout and wire management
- 6' IEC320 3-wire power cord
- 2U drawer on extendable rails
- Black powder coated steel enclosure
- Convenient knockout configuration:
  - Four (4) double knockouts - 3/4" Conduit and 1" Conduit
  - Two (2) double knockouts - 1/2" Conduit and 3/4" Conduit
- Included Z Bracket facilitates ease of wiring
- CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Charger and Sub-Assemblies only*

## Accessories (order separately)



RE2

**RE2 - Rack Mount Battery Enclosure**
accommodates up to four (4) 12VDC/7AH batteries



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**
Altronix WM5, WM25, and WM100 are packs of
5, 25 or 100 magnetic cable tie mounts respectively.
They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

# T1RAL3316D

Rack Access and Power Integration Solution

## Specifications

### Two (2) Power Supply/Chargers (AL600RLB):

**Input**

| | |
|---|---|
| Voltage | 115VAC, 60Hz, 3.5A max. |
| Input Fuse | 5A/250V |

**Output**

| | |
|---|---|
| Voltage | 12VDC or 24VDC selectable |
| Current | 6A @ 12VDC or 24VDC continuous max. |
| Other | Overvoltage protection<br>Filtered and regulated |

**Battery Charging**

| | |
|---|---|
| Type | Sealed lead acid or gel type |
| Failover | Upon AC loss, instantaneous |

Batteries are sold separately

**Supervision**

| | |
|---|---|
| AC Failure | Form “C” contacts |
| Battery | Form “C” contacts |

**Indicators (LED)**

| | |
|---|---|
| Input | 115VAC is present |
| DC Output | Powered |
| Battery | Discharged or not connected |

### Two (2) Dual InputAccess Power Controllers (ACMS8CB):

**Input**

| | |
|---|---|
| Voltage | 24VDC from one AL600RLB and<br>12VDC from another |
| Input PTCs | 9A |

**Outputs**

Voltage: 12 or 24VDC individually selectable.

Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) indepently controlled Form “C” relay outputs:

a) Fail-Safe and/or Fail-Secure power outputs
b) Form “C” Relays. 28VAC or VDC @ 2.5A Rated
c) Auxiliary power outputs (unswitched)
d) Any combination of the above

Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs: 2.5A

**Indicators (LED)**

| | |
|---|---|
| Red LEDs | Outputs are triggered (relays energized) |
| Blue LED | FACP disconnect is triggered |

Individual voltage LEDs

| | |
|---|---|
| Green: | 12VDC |
| Red: | 24VDC |

### T1RAL3316D Kit:

**Agency Listings**

| | |
|---|---|
| CE | European Conformity |

**Physical and Environmental:**

Dimensions (H x W x D):

Modular 2U standard EIA 19” rack mount chassis
Enclosure: 3.25” x 19.0” x 26.5” (82.6mm x 482.6mm x 673.1mm)
Shipping: 31” x 23” x 8.25” (787.4mm x 584.2mm x 209.6mm)

Weights (approx.):

| | |
|---|---|
| Product: | 23 lb. (10.4 kg) |
| Shipping: | 26.6 lb. (12.1 kg) |

Temperature


| | |
|---|---|
| Operating: | 0ºC to 49ºC (32ºF to 120ºF) |
| Storage: | – 20ºC to 70ºC (– 4ºF to 158ºF) |

| | |
|---|---|
| Relative Humidity | 85% +/– 5% |
| BTU/Hr.: | 172 BTU/Hr. |

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

# T1RAL3316D

Rack Access and Power Integration Solution

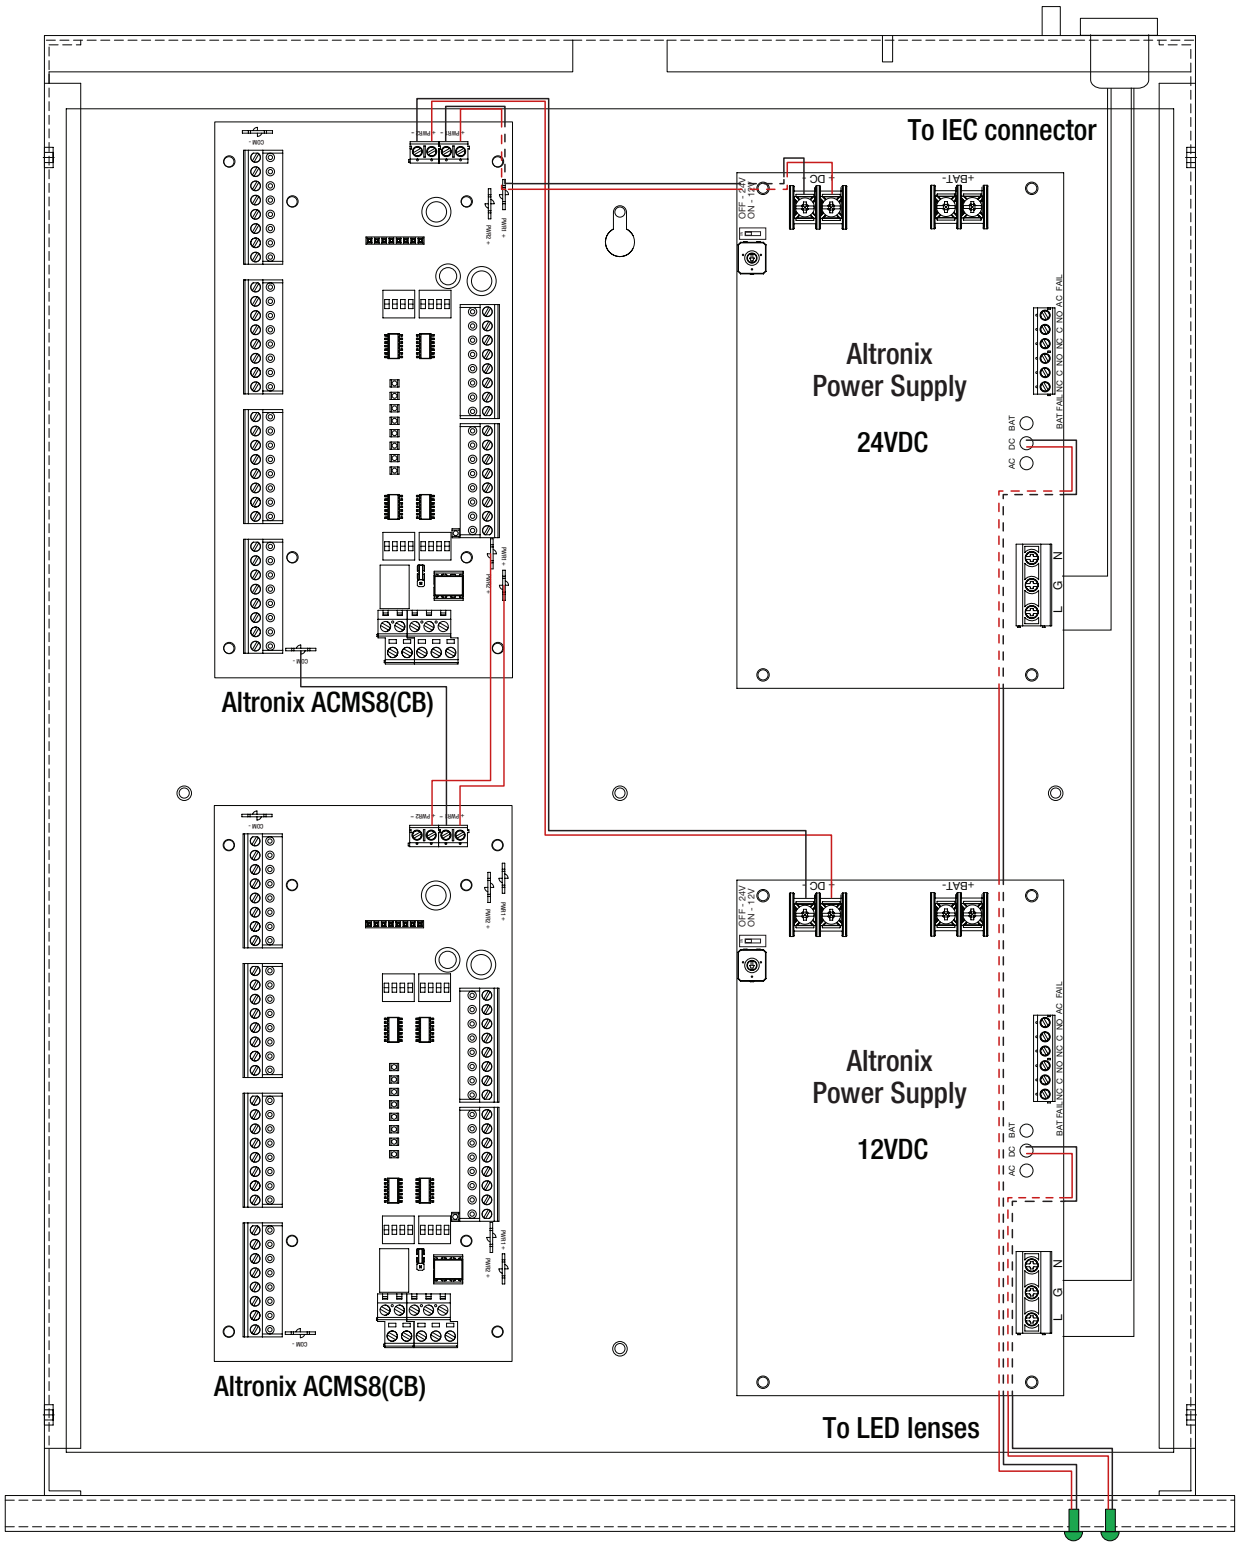


Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com


# T1RAL3316D

Rack Access and Power Integration Solution

## Dimensions and Drawing

Dimensions (H x W x D approximate)

3.25” x 19.0” x 26.5” (82.6mm x 482.6mm x 673.1mm)

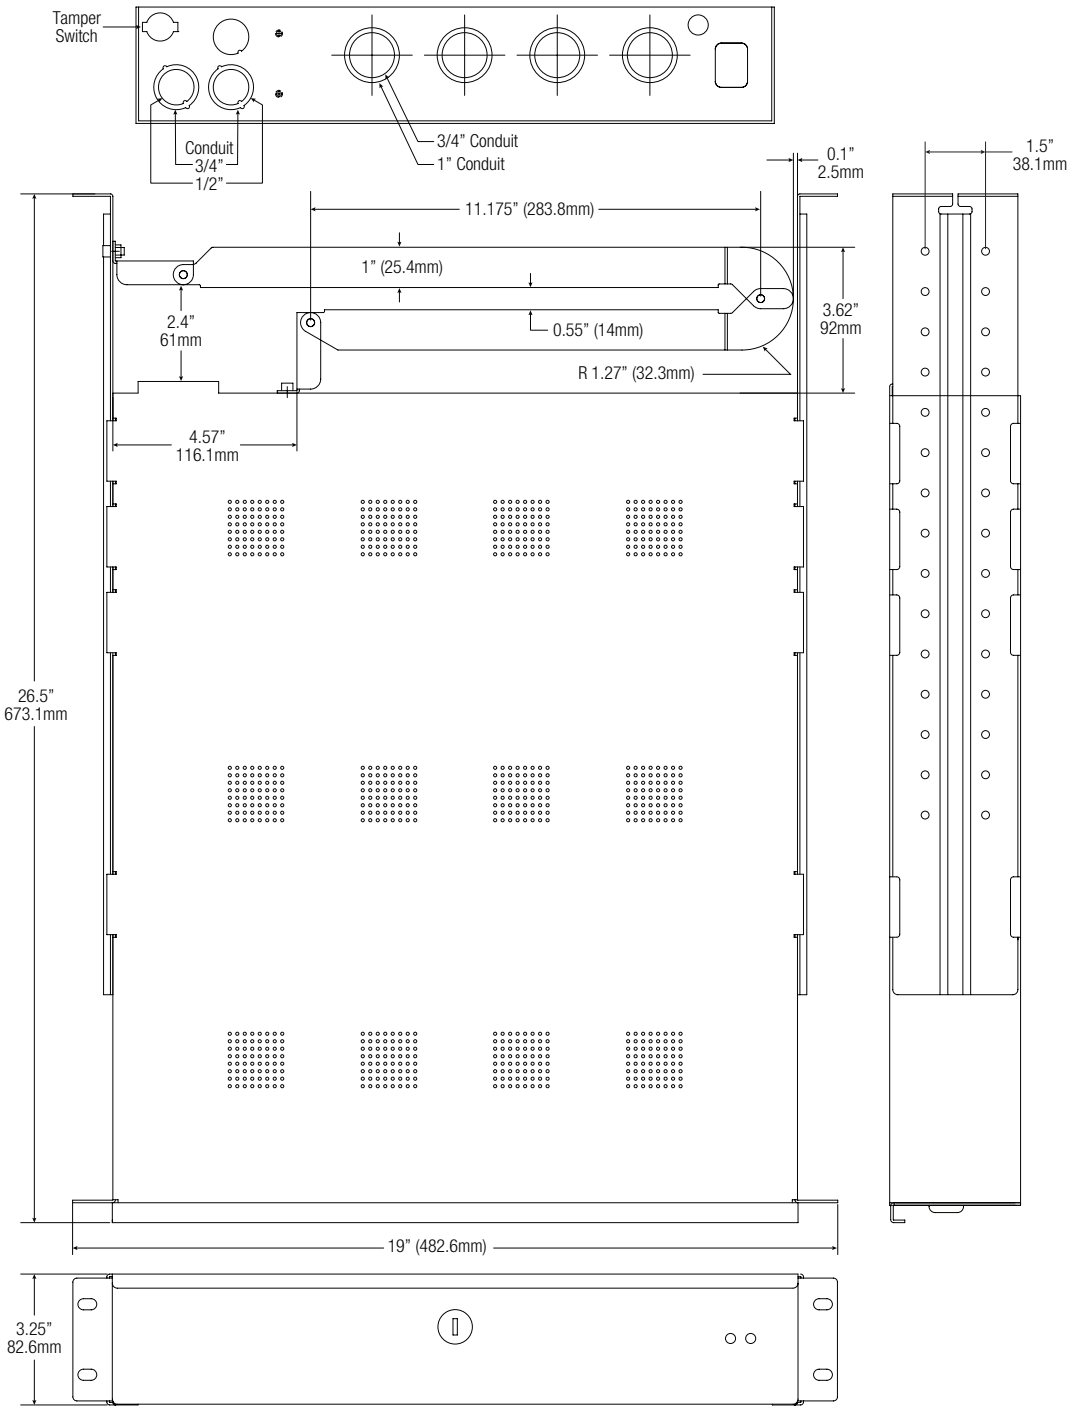


Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com