

# T1RZ3CK1 (Pre-wired Kit)

## Rack Access and Power Integration Solution for Mercury



Altronix T1RZ3CK1 is a 4-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for ZKTeco hardware. This unit provides ample power and dual voltage outputs to support ZKTeco platform controllers and locking devices. The T1RZ3CK1 accommodates one (1) Atlas 460 four (4) door controller. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.



T1RZ3CK1 - includes eFlow6RLB, ACMS8, VR6, wire harnesses and management



*ZKTeco boards are not included*

### Key Features

- Accommodates the following ZKTeco controllers:
  - 1 - Atlas 460
- Power status LED on front panel
- Simplified board layout and wire management
- Convenient knockout configuration:
  - Four (4) double knockouts - 3/4" Conduit and 1" Conduit
  - Two (2) double knockouts - 1/2" Conduit and 3/4" Conduit
- 6' IEC320 3-wire power cord
- 2U drawer on extendable rails
- Black powder coated steel enclosure
- Included Z Bracket facilitates ease of wiring
- Includes cam lock, tamper switch and mounting hardware
- CE European Conformity
- Lifetime Warranty\*

*\*Altronix Power Supply/Charger and Sub-Assemblies only*

### Accessories (order separately)



RE2

**RE2 - Rack Mount Battery Enclosure**  
accommodates up to four (4) 12VDC/7AH batteries



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**  
Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.

**Specifications**

**Power Supply/Charger (eFlow6RLB):**

**Input**

Voltage 120VAC, 60Hz. 3.5A  
Input Fuse 5A/250V

**Output**

Voltage 24VDC  
Current 6A continuous  
Auxiliary 1A (unswitched)  
Other Overvoltage protection. Filtered and regulated

**Battery Charging**

Type Sealed lead acid or gel type  
Failover Upon AC loss, instantaneous  
Batteries are sold separately

**Supervision**

AC Failure Form "C" contacts  
Battery Form "C" contacts

**Low DC Power Shutdown**

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)  
Prevents deep battery discharge

**Indicators (LED)**

Input 120VAC is present  
DC Output Powered  
Battery Discharged or not connected

**Voltage Regulator (VR6):**

**Input**

Voltage 24VDC from eFlow6RLB

**Output**

Voltage 12VDC  
Current 6A continuous  
Other Surge suppression

**Indicators (LED)**

Input 24VDC is present  
Output Powered

**Dual Input Access Power Controller (ACMS8):**

**Input**

Voltage 24VDC from eFlow6RLB and 12VDC from VR6

Input Fuses 15A/32V

**Outputs**

Voltage 24VDC  
Eight (8) 24VDC independently controlled fused outputs  
a) Fail-Safe and/or Fail-Secure power outputs  
Form "C" Relays rated 28VAC or VDC @ 2.5A  
b) Auxiliary power outputs (unswitched)  
c) Any combination of the above

Output Fuses 3A/32V

**Indicators (LED)**

Red LEDs Outputs are triggered (relays energized)  
Green LED FACP disconnect is triggered

**T1RZ3CK1 Kit:**

**Agency Listings**

CE European Conformity

**Physical and Environmental:**

**Dimensions (H x W x D):**

Modular 2U standard EIA 19" rack mount chassis  
Enclosure: 3.25" x 19.0" x 26.5" (82.6mm x 482.6mm x 673.1mm)  
Shipping: 31" x 23" x 8.25" (787.4mm x 584.2mm x 209.6mm)

**Weights (approx.):**


Product: 20 lb. (9.07 kg)  
Shipping: 25 lb. (11.34 kg)

**Temperature**

Operating: 0°C to 49°C (32°F to 120°F)  
Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr.: 87 BTU/Hr.

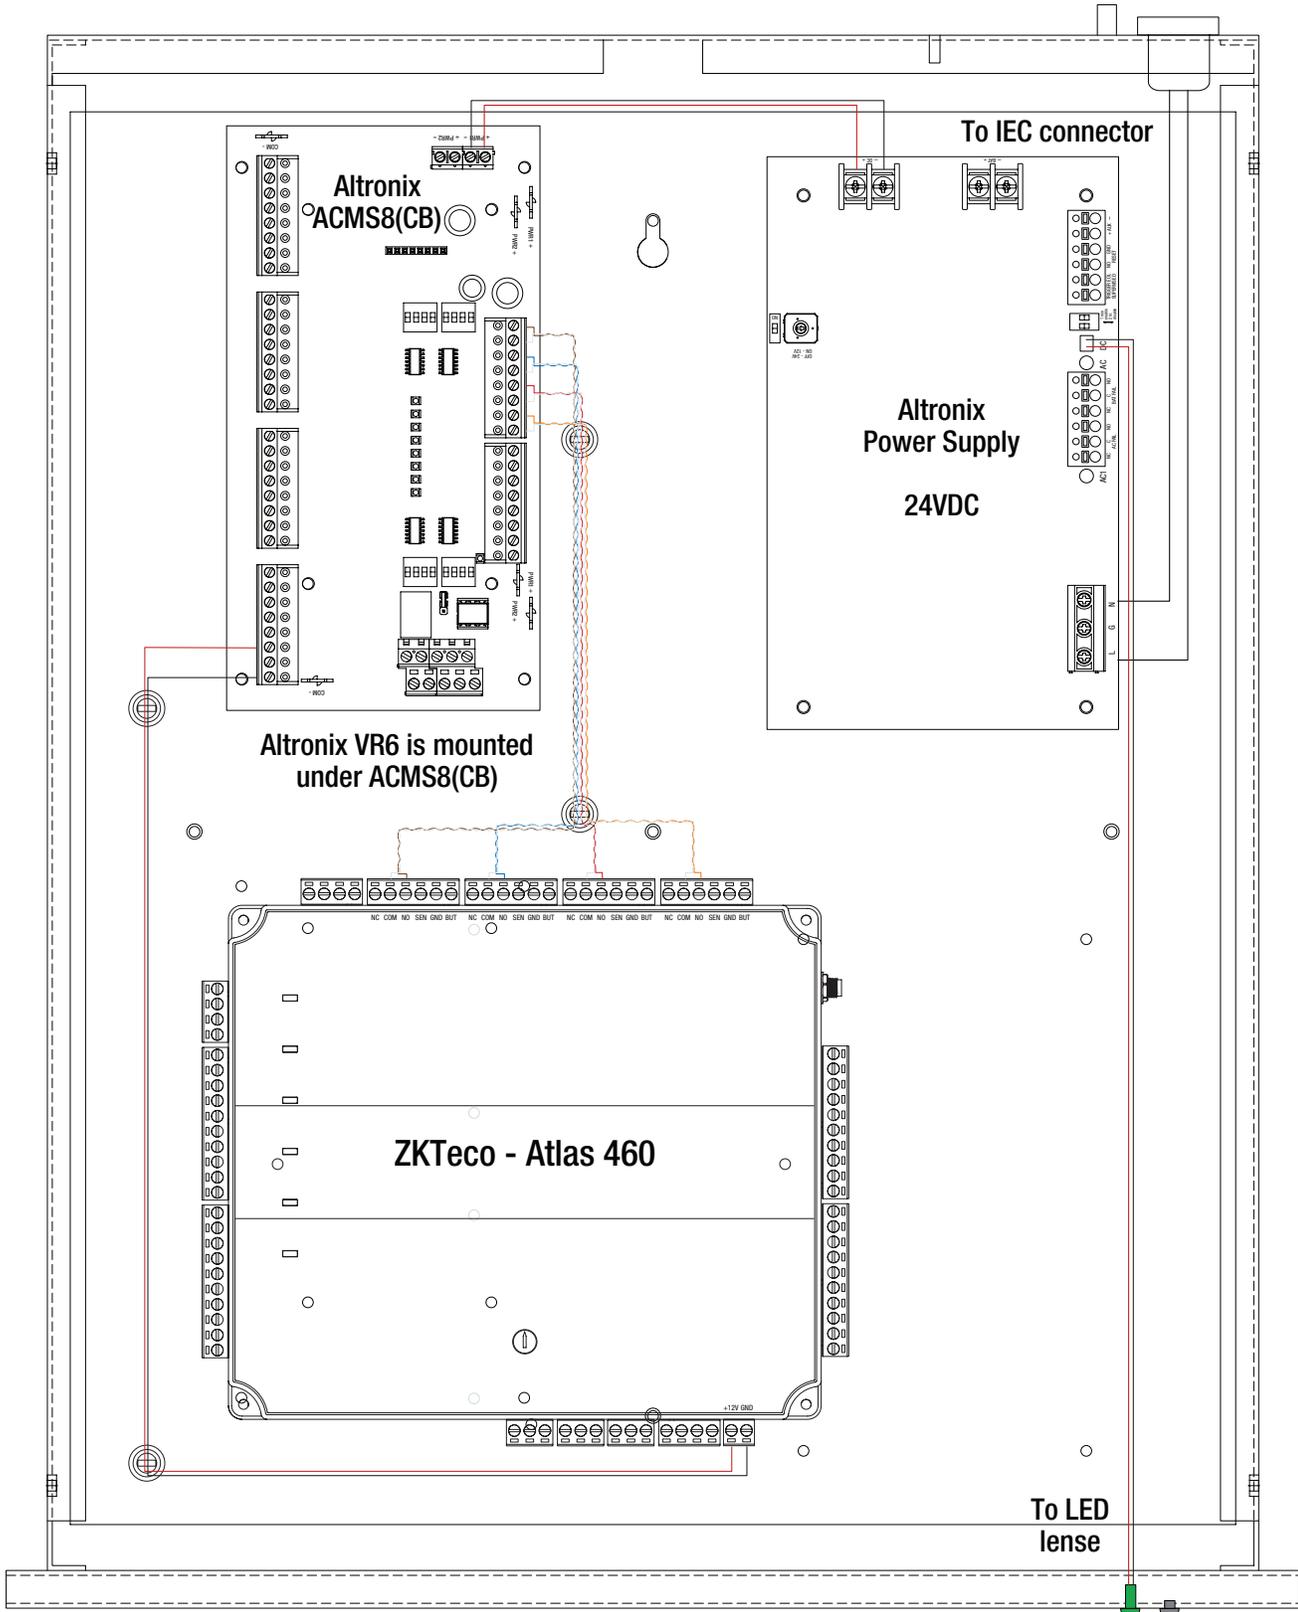

**Dimensions and Drawing**

Dimensions (H x W x D approximate)  
 3.25" x 19.0" x 26.5" (82.6mm x 482.6mm x 673.1mm)

